

Система световых линий IDOO, DOTOO

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: wne@nt-rt.ru || сайт: <https://waldmann.nt-rt.ru/>



These Button leads
back here



Clicking on a headline
leads directly to the page

1

...

2

...

3

...

4

...



DESIGN

A modern classic that combines both the highest aesthetic and technically innovative demands for modern office planning. One system, one design language for individual design of numerous applications via continuous LED lines.

IDOO




Indirect/direct distribution

DOTOO


Direkt distribution



SINGLE LUMINAIRE

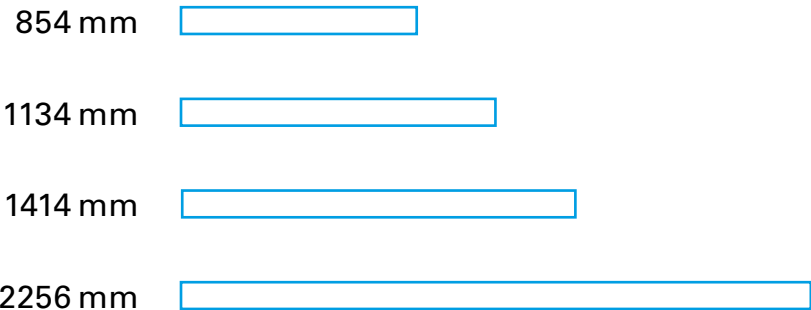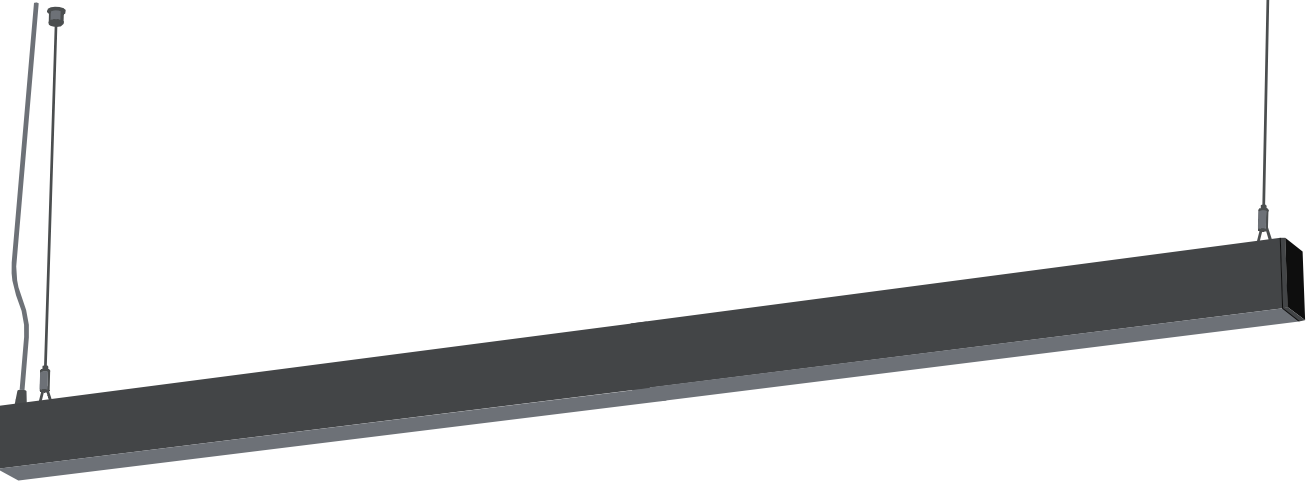

MODULAR SYSTEM

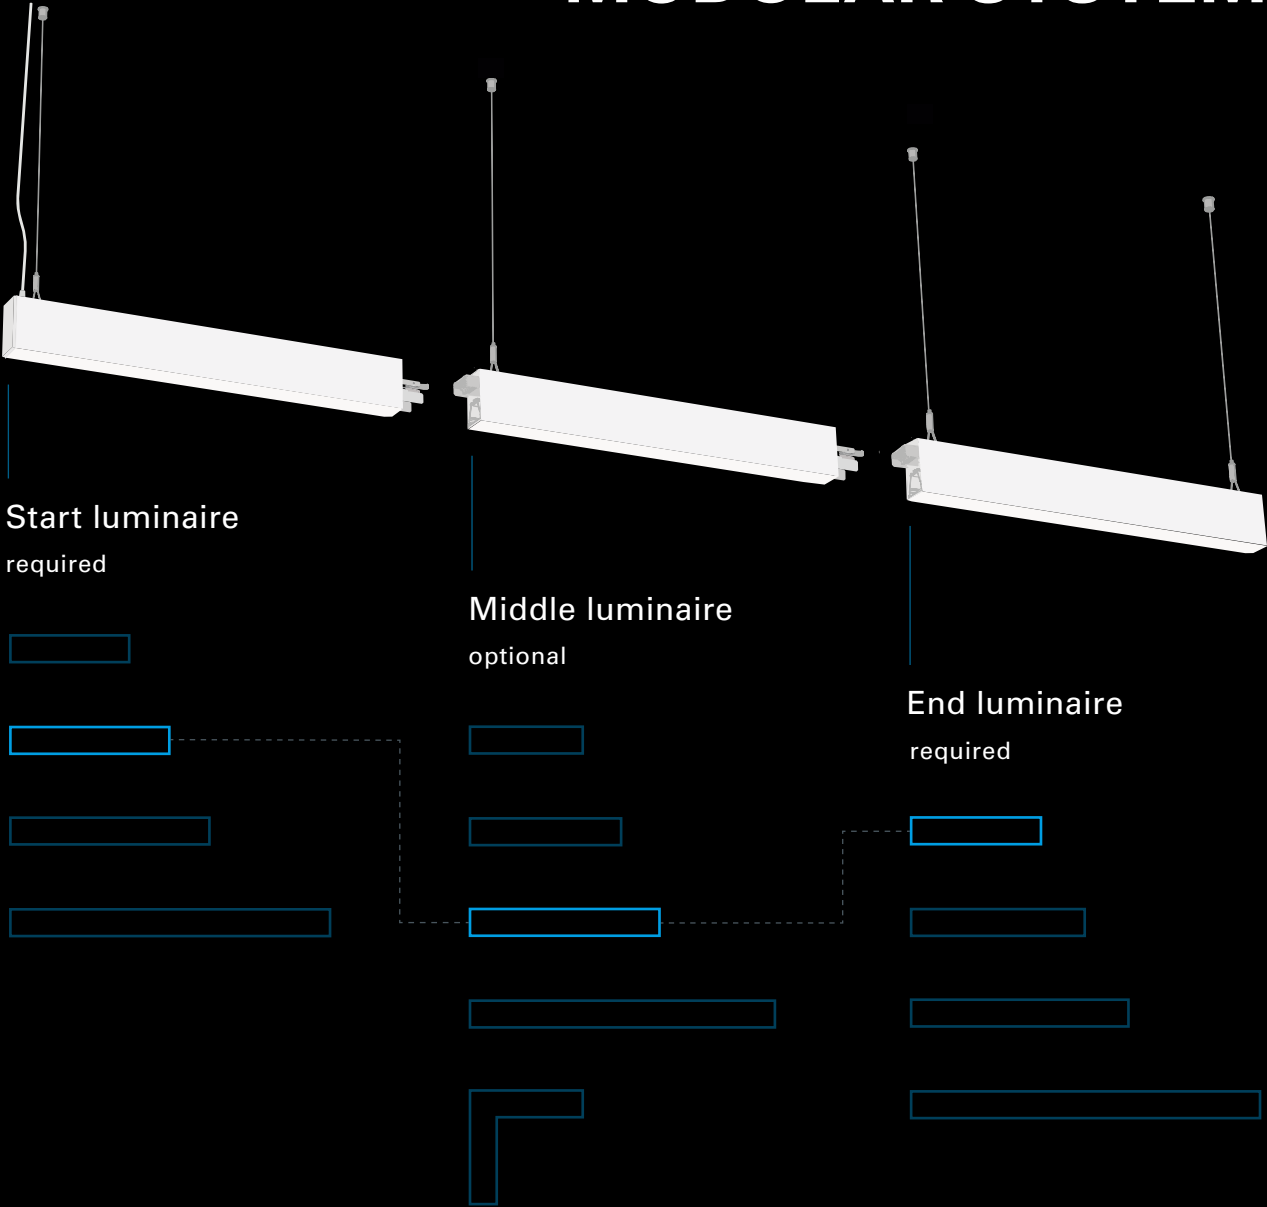

Whether linked or single, IDOO or DOTOO;
Start, middle and end luminaires in four lengths,
to complete a modular system.

Overall length

854 mm

SINGLE LUMINAIRE
854 mm

1134 mm

SINGLE LUMINAIRE
1134 mm

1414 mm

SINGLE LUMINAIRE
1414 mm

1696 mm

START LUMINAIRE 848 mm
END LUMINAIRE 848 mm

1976 mm

START LUMINAIRE 1128 mm
END LUMINAIRE 848 mm

2256 mm

SINGLE LUMINAIRE
2256 mm

2536 mm

START LUMINAIRE 1408 mm
END LUMINAIRE 1128 mm

2816 mm

START LUMINAIRE 1408 mm
END LUMINAIRE 1408 mm

3098 mm

START LUMINAIRE 2250 mm
END LUMINAIRE 848 mm

3378 mm

START LUMINAIRE 2250 mm
END LUMINAIRE 1128 mm

3658 mm

START LUMINAIRE 2250 mm
END LUMINAIRE 1408 mm

3940 mm

START LUMINAIRE 2250 mm
MIDDLE LUMINAIRE 842 mm
END LUMINAIRE 848 mm

4220 mm

START LUMINAIRE 2250 mm
MIDDLE LUMINAIRE 1122 mm
END LUMINAIRE 848 mm

⋮
max

17964 mm

START LUMINAIRE 2250 mm
MIDDLE LUMINAIRE 6 x 2244 mm
END LUMINAIRE 2250 mm

280
mm

The individual parts to make up the modular system adapt to the room's layout. A total length of 18m is possible from one electric feed, and can even include 90° corners.



LIGHTING CONCEPT

Freedom of design for your lighting concept. The ability to create atmosphere as well as provide optimal zone-dependent lighting, thanks to highly developed lighting technology - vertical or horizontal, ambient or directional.



APPLICATION



Click to shine a light.

■ Break-Out-Zone

■ Meeting

■ Office

■ Reception

■ Corridor and stairs




CDP

LIGHTING TECHNOLOGY







CDP
Conical De-glaring Prism




Suitable for office workplace lighting compliant with standards.

The conical prismatic cover in combination with a light-directing film ensures optimum glare control, uniform light distribution and a homogenous light pattern on the luminaire's surface.

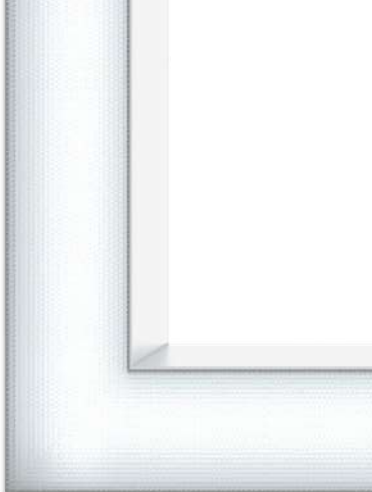


MD
Micro-Downlight




Suitable for the accenting of selected room areas.

The complex geometry of the micro-facets in the downlights enables precise shaping of the light beam. The angles of the direct and the reflected light beams are perfectly aligned with each other and ensure an accurate beam of light.




WW
Wall Washer



Suitable for uniform illumination of large vertical wall surfaces.

The complex geometry of the microfacets in the reflectors enables a high level of uniformity even from the light point's mounting height, and precise light control to avoid glare.

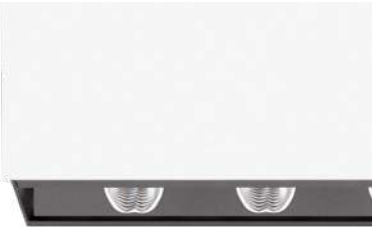

LIGHTING TECHNOLOGY

WW

CDP


MD

CDP

MD

CDP

WW

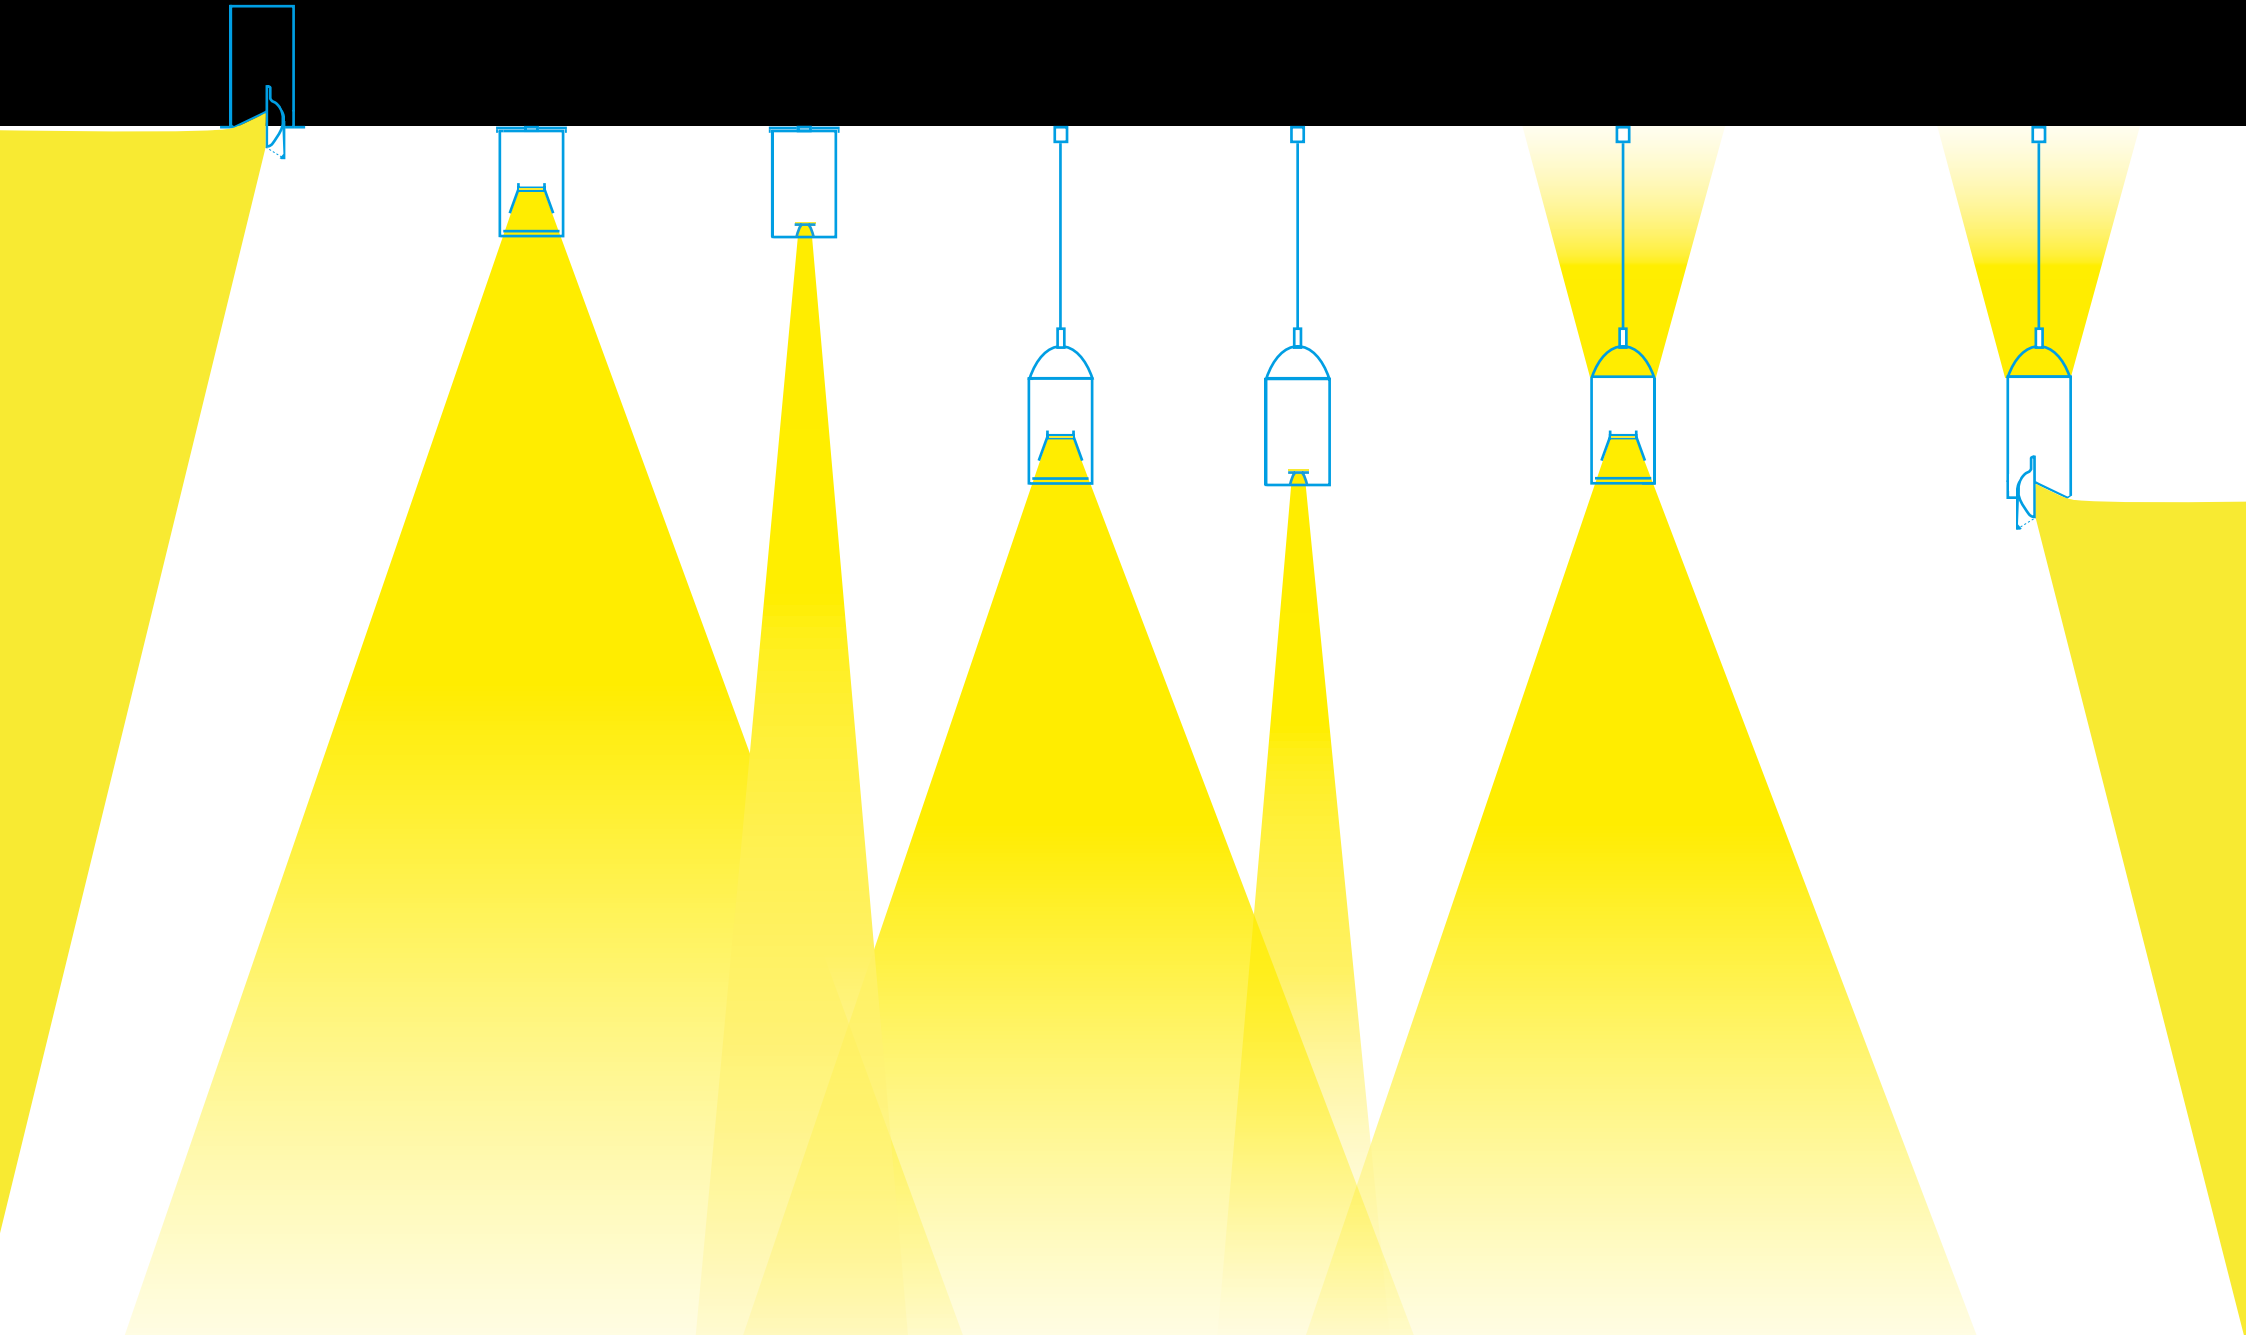



MD
I

WW
I



LTX-Ceiling sensor KIRK

Optimally used office space

The data from the sensor is the basis for the analysis of office use and the measurement of environmental parameters.



Light management for room illumination

Luminaires connected via DALI are controlled by the ceiling sensor.

The best working conditions

Environmental parameters such as air quality and noise levels are displayed, based on threshold values, via the LEDs on the ceiling sensor.



Healthy light

VTL control for biodynamic light that optimally harmonises the visual, emotional and biological effects of lighting.



Convenient adjustment via app


With the Waldmann App the sensor can be easily configured and set for operation.



Light environment to feel good in

The system uses swarm control to create zonal lighting, and allows the luminaires to communicate with each other.

LTX-Ceiling sensor KIRK

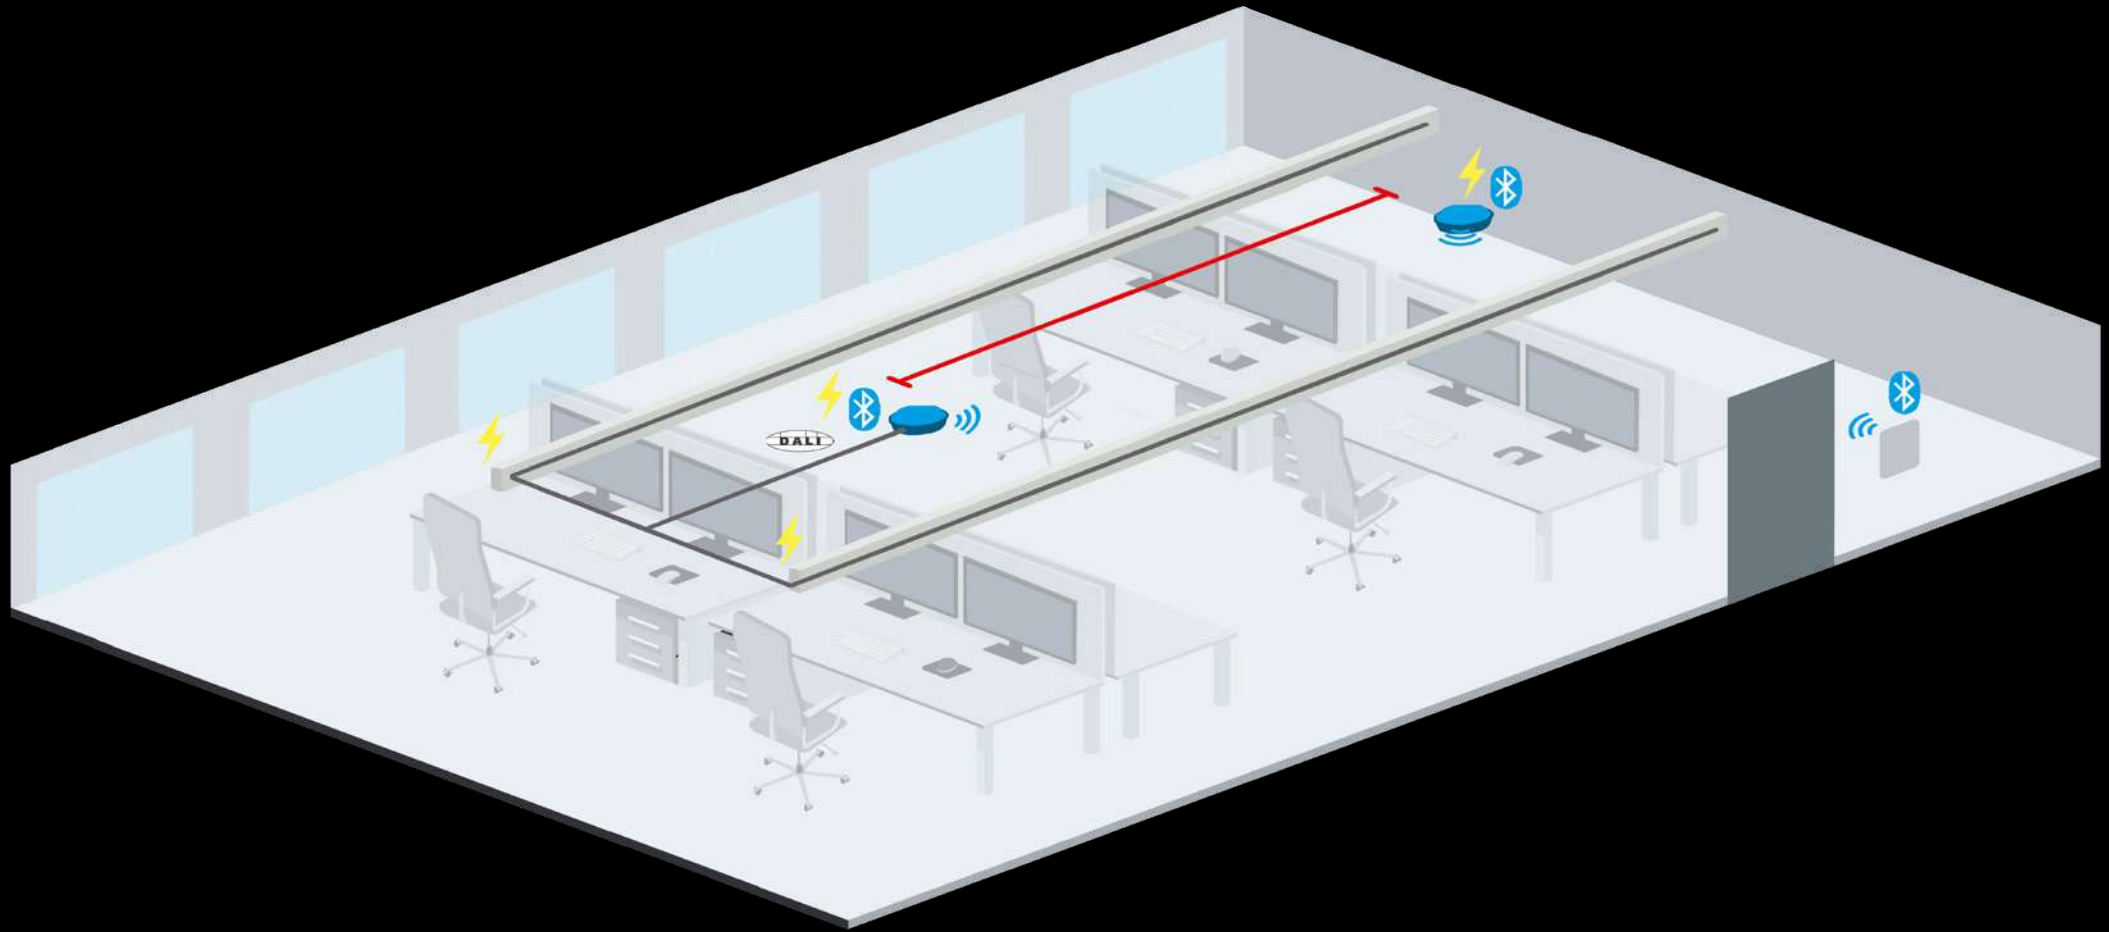

Bluetooth,
15 m reach



Mains voltage



DALI-Control



LTX-Ceiling sensor
4x4 m Detection range



Radio wall transmitter



max. 15 m Distance

VTL



WE GIVE PEOPLE BACK
WHAT IS TAKEN AWAY FROM THEM
IN THE OFFICE.”

Prof. Dr. med. Dipl. Ing. Herbert Plischke
Professor of Light and Health


- Constant luminous flux in the colour temperature range 2,700 K - 6,500 K
- Consistent colour temperature across all dimming levels
- CRI ≥ 90 with R9 ≥ 70
- $m_{v, mel, D65} 0,70$
(DIN SPEC 5131-100 (2015)/ DIN SPEC 67600)

Visual Timing Light (VTL) brings the dynamics of natural daylight into the interior of a building and expands the emotional and ergonomic aspects of lighting quality through the non-visual effect of light. This directly promotes people's health, well-being and performance. The extent to which light has a non-visual effect depends largely on the colour temperature, illuminance and timing.

Equipped with VTL, the IDOO.line changes intensity and colour temperature according to the natural course of daylight or working hours. A control curve defined according to scientific findings and decades of experience is given to the luminaire by an on-site DALI Device Type 8 controller. In combination with the LTX ceiling sensor, commissioning is extremely simple: Plug & Light! The sensor is programmed at the factory and controls the luminaires. Additionally, it optimises the energy balance through intelligent lighting management.

#fightingbiologicaldarkness


% ↑  Color temperature
↓ t

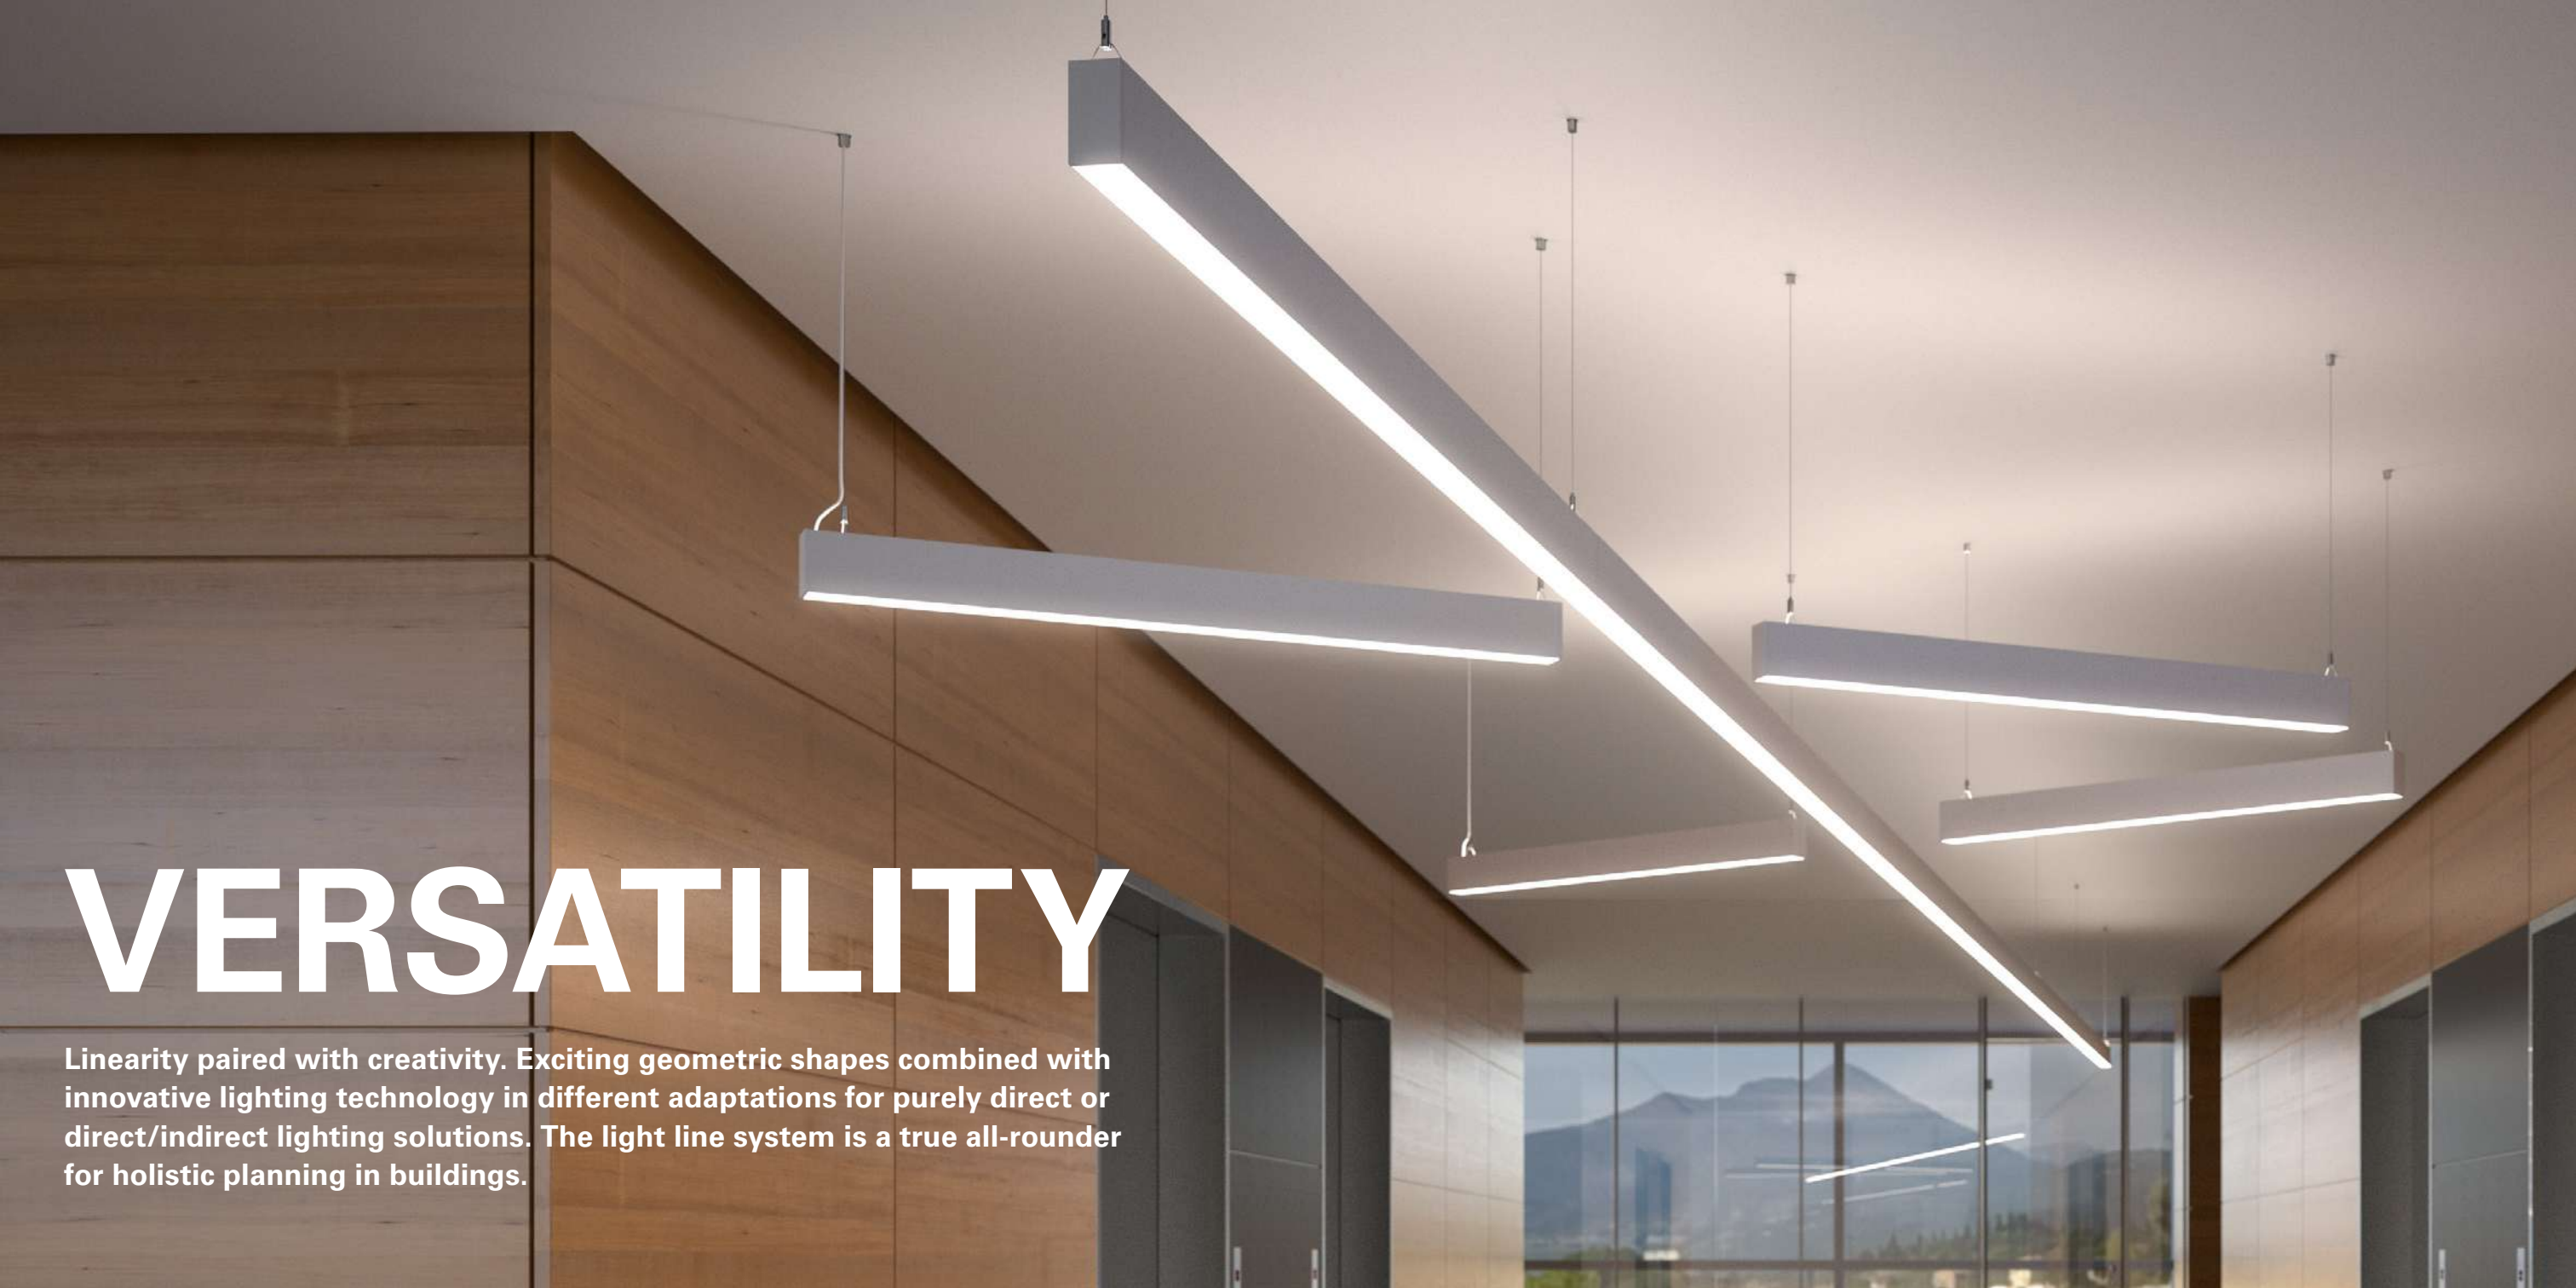


VERSATILITY

Linearity paired with creativity. Exciting geometric shapes combined with innovative lighting technology in different adaptations for purely direct or direct/indirect lighting solutions. The light line system is a true all-rounder for holistic planning in buildings.


ADAPTATION TYPE

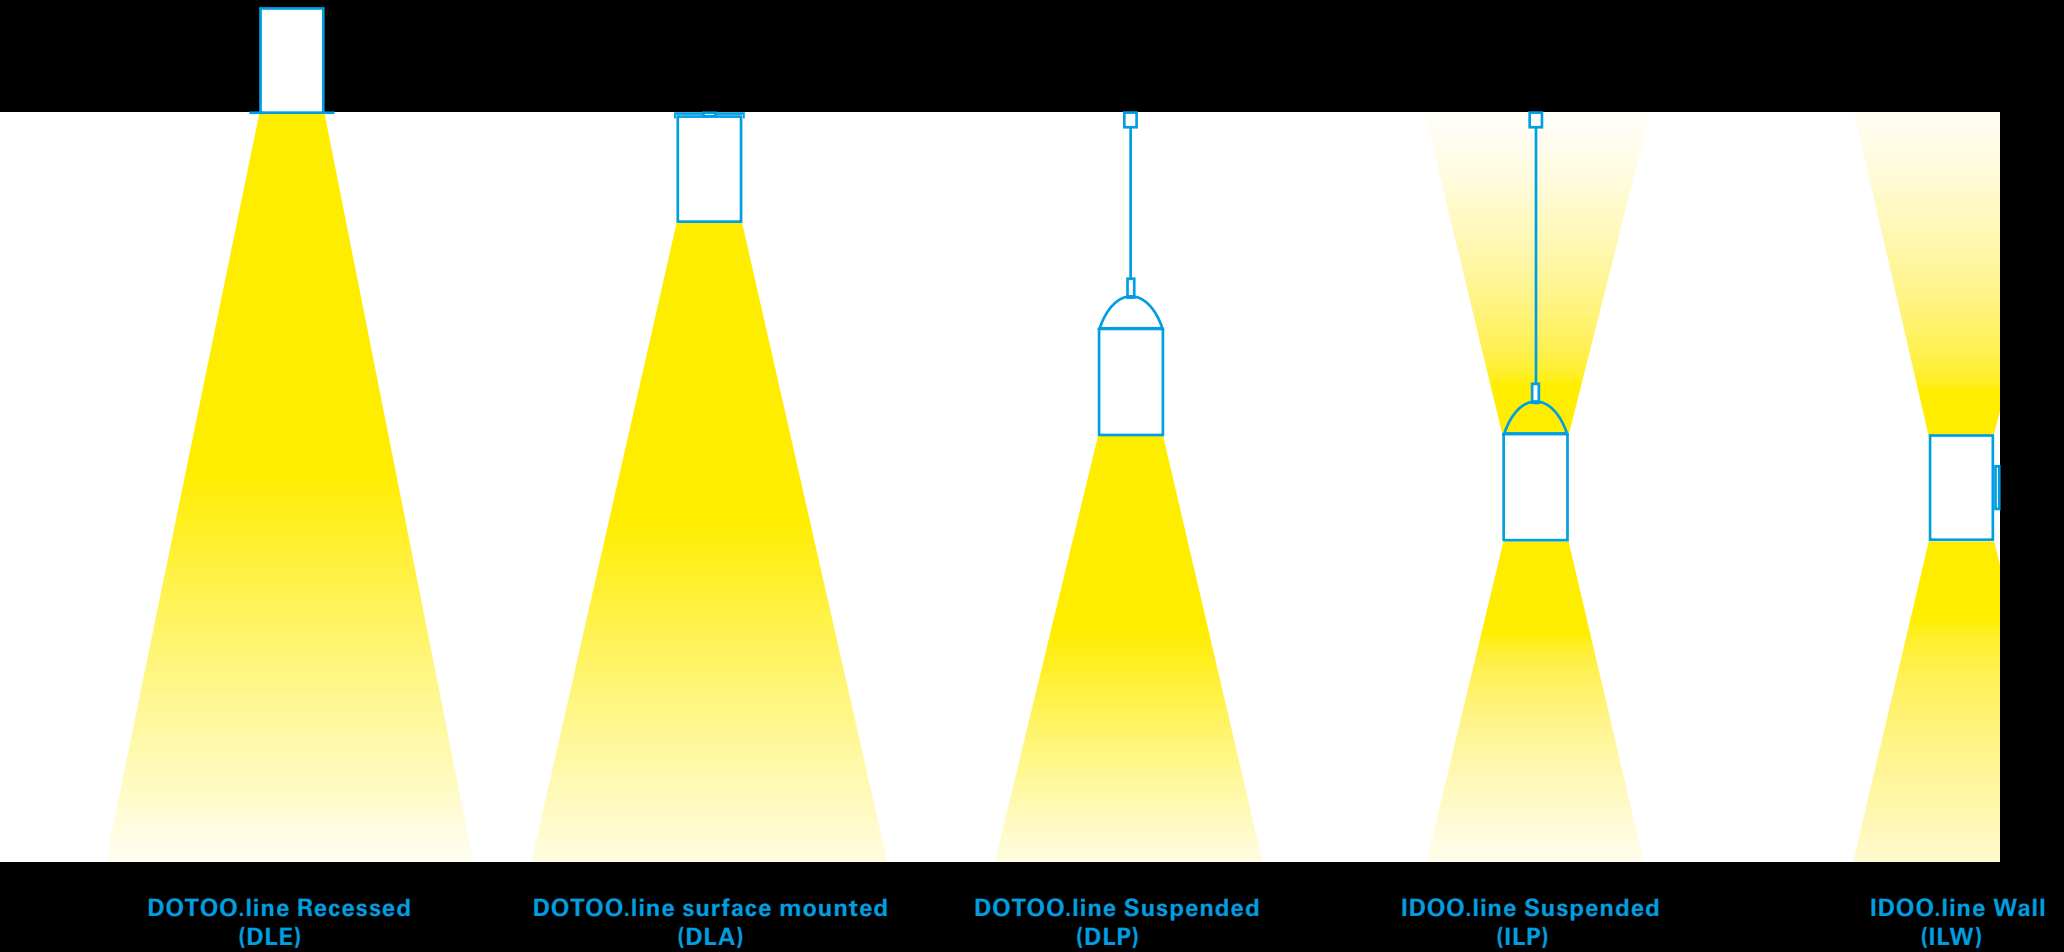


SYSTEM OVERVIEW

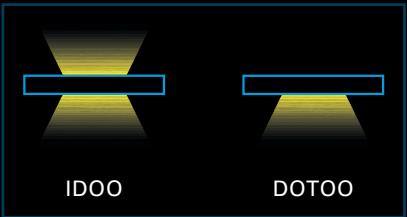


LIGHT DISTRIBUTION

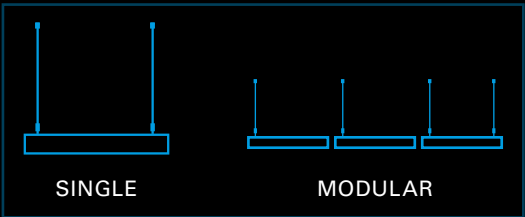

CONFIGURATION

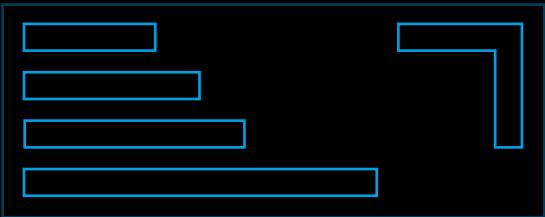


LENGTH

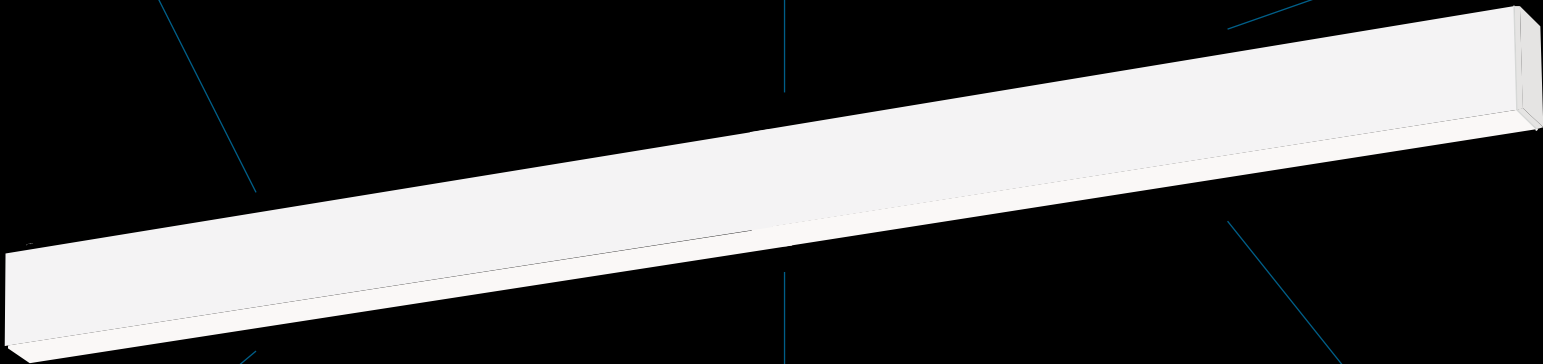


FINISH


- WHITE
- SILVER
- BLACK (ON REQUEST)

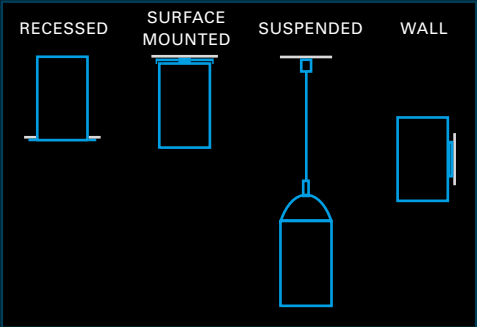

ADAPTATION TYPE

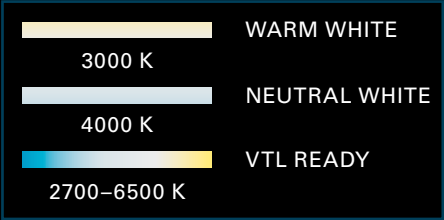


LIGHT COLOUR

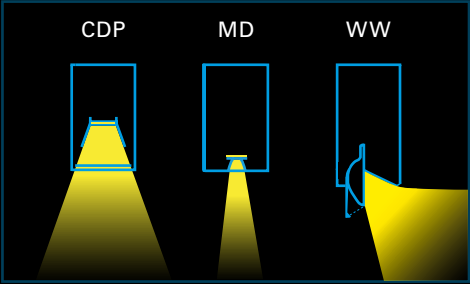

LIGHT TECHNOLOGY

MOUNTING

All fixing components required for installation are included.

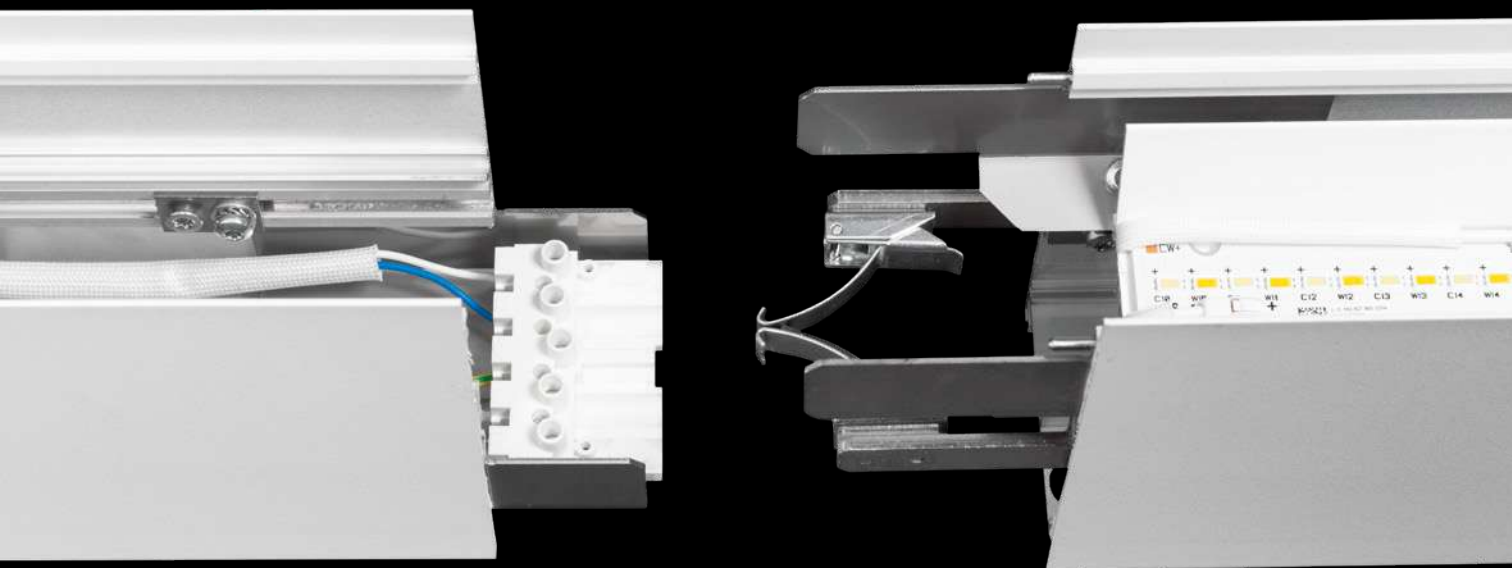

Tool-free electrical and mechanical connection of the modular system by integral plug-and-play through-wiring and clamping system.




Flexible alignment of the suspensions on pendant luminaires as well as adjustable pendant length. Surface mounted luminaire brackets can compensate for variances across ceiling surface.

TECHNICAL OVERVIEW

Adaptation types	Surface mounted	Recessed	Pendant	Wall
Light distribution				
Direct (DOTOO)	●	●	●	
Indirect/Direct (IDOO)			●	●
Lighting technology				
CDP	●	●	●	●
MD35°	●	●	●	
MD55°	●	●	●	
MD75°	●	●	●	
WW	●	●	●	
Light color				
warm white, 3000K	●	●	●	●
neutral white, 4000K	●	●	●	●
VTL ready, 2700–6500K			●	
Outside dimension				
mm (WxH)	60x112	70x130	60x110	73x110

Adaptation types	Surface mounted	Recessed	Pendant	Wall
Configuration				
Single luminaire 854 mm		●	●	●
Single luminaire 1134 mm		●	●	
Single luminaire 1414 mm		●	●	●
Single luminaire 2256 mm		●	●	
Modular: Start/Middle/End	●		●	
Weight kg/m				
Single luminaire 854 mm		ca. 3.1	ca. 3.3	ca. 3.9
Single luminaire 1134 mm		ca. 3.9	ca. 4.1	ca. 4.7
Single luminaire 1414 mm		ca. 4.7	ca. 4.9	
Single luminaire 2256 mm		ca. 7.3	ca. 7.6	
Modular: Start/Middle/End	ca. 3.5		ca. 4.9	

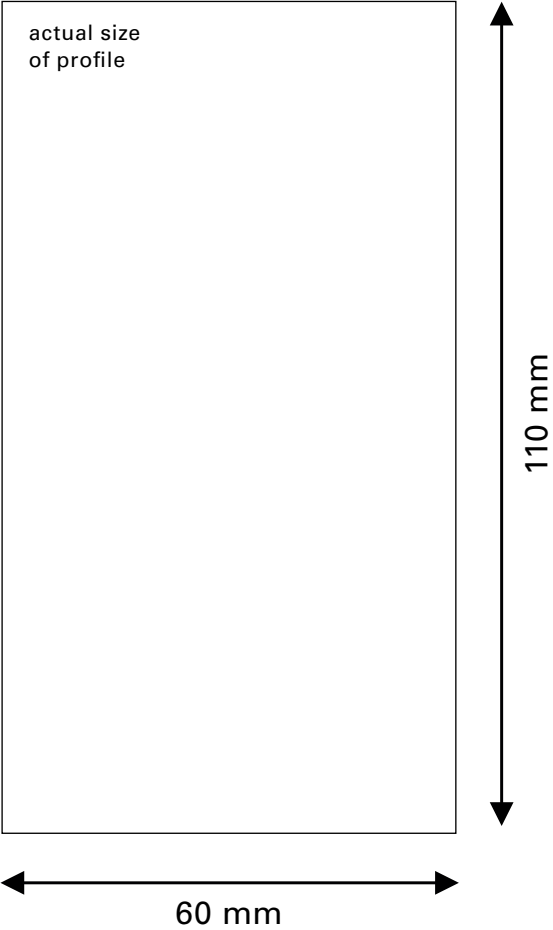



WALDMANN

Homogeneous and glare-free light distribution. Waldmann offers a wide range of attractive lighting solutions with a minimalist design language, excellent workmanship and lighting quality.

ROOM ILLUMINATION

Whether recessed, surface mounted, or suspended: the latest technology ensures high efficacy with low power consumption. With DALI our luminaires can be integrated into most building management systems.



LAVIGO
Suspended Luminaires



ORION8®
Sound vacuum cleaner



VIVAA.pendant
Suspended Luminaires



VIVAA.fit
Surface-Mounted Luminaires



OBLO.fit
Surface-Mounted Luminaires



DOTOO.fit
Recessed modular Luminaire



ZERA.wall
Wall-Mounted Luminaires



ZERA.bath
Wall-Mounted Luminaires


SHINE A LIGHT

#blackforestlight

We have been building some of the best lighting systems in the world, in Villingen-Schwenningen, for over 90 years. Our light is not an end in itself, our light serves: To create, to expand horizons, to wake up, to control hormones. Maximum quality and optimum user-friendliness ensure that people can achieve their aims. They can do it as well as possible thanks to state-of-the-art German technology. We cast the optimum light in many offices, industrial buildings and care facilities, designed by leading architects. Innovative solutions that are easy to install and use, with timeless modern good design, and typical Swabian value for money. Waldmann, a world market leader with 1,000 employees and locations in 10 countries. Family-run, as befits hidden champions.



IDOO.line & DOTOO.line

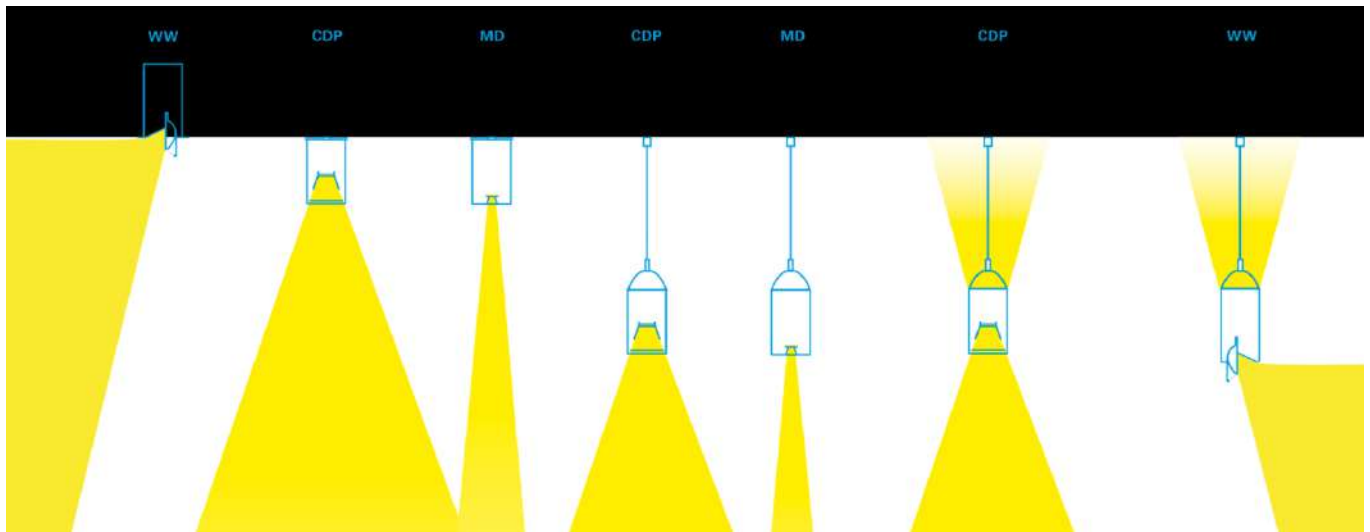

Whether linked or single, IDOO or DOTOO; Start, middle and end luminaires in four lengths, to complete a modular system. The individual parts to make up the modular system adapt to the room's layout. A total length of 18m is possible from one electric feed, and can even include 90° corners.



CDP (Conical De-glaring Prism)

Suitable for office workplace lighting compliant with standards.

The conical prismatic cover in combination with a light-directing film ensures optimum glare control, uniform light distribution and a homogenous light pattern on the luminaire's surface.



MD (Micro-Downlight)

Suitable for the accenting of selected room areas.

The complex geometry of the micro-facets in the downlights enables precise shaping of the light beam. The angles of the direct and the reflected light beams are perfectly aligned with each other and ensure

an accurate beam of light.



WW (Wall Washer)

Suitable for uniform illumination of large vertical wall surfaces.

The complex geometry of the microfacets in the reflectors enables a high level of uniformity even from the light point's mounting height, and precise light control to avoid glare.

SINGLE AND LINKABLE LUMINAIRES Conical prismatic cover (CDP)



IDOO.line
Single Luminaire Suspended



DOTOO.line
Single Luminaire Suspended



DOTOO.line
Single Luminaire recessed



IDOO.line
Single Luminaire Wall



IDOO.line
for daisy chaining suspended



DOTOO.line
for daisy chaining suspended



Dotoo.line
for daisy chaining surface

SINGLE AND LINKABLE LUMINAIRES Microdownlights (MD) / Wallwasher (WW)



The freedom of design for your lighting concept using highly developed reflector technology is enabled by the combination of luminaire housings in 4 lengths and corresponding light modules oder blind covers in 3 lengths.

All light modules can be combined with any luminaire housing of the various mounting types that fits in length, regardless of whether it is a pendant, recessed or surface-mounted luminaire housing - it is always the identical light module that is easily connected to the luminaire

housing via plug connectors before it simply snaps into the profile.
Luminaire housing and light modules/blind covers must be ordered separately.

Luminaire Housing Suspended Luminaires

Dotoo Single Luminaires White

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
		White	DLP WS/EINZEL/1134MM 00809376
		White	DLP WS/EINZEL/1414MM 00809384
		White	DLP WS/EINZEL/2256MM 00809392
		White	DLP WS/EINZEL/854MM 00809135

Idoo Single Luminaires White

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
25 W		White	ILP 840/D/WS/EINZEL/1134MM 00809301
30 W		White	ILP 840/D/WS/EINZEL/1414MM 00809352
48 W		White	ILP 840/D/WS/EINZEL/2256MM 00809362
19 W		White	ILP 840/D/WS/EINZEL/854MM 00809270

Dotoo Single Luminaires Silver

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
		Silver	DLP SR/EINZEL/1134MM 00809380
		Silver	DLP SR/EINZEL/1414MM 00809388
		Silver	DLP SR/EINZEL/2256MM 00809396
		Silver	DLP SR/EINZEL/854MM 00809153

Idoo Single Luminaires Silver

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
25 W		Silver	ILP 840/D/SR/EINZEL/1134MM 00809347
30 W		Silver	ILP 840/D/SR/EINZEL/1414MM 00809356
48 W		Silver	ILP 840/D/SR/EINZEL/2256MM 00809366
19 W		Silver	ILP 840/D/SR/EINZEL/854MM 00809285

Dotoo Luminaire for daisy chaining White

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
		White	DLP WS/END/1128MM 00809379
		White	DLP WS/END/1408MM 00809387
		White	DLP WS/END/2250MM 00809395
		White	DLP WS/END/848MM 00809151
		White	DLP WS/MITTEL/1122MM 00809378
		White	DLP WS/MITTEL/1402MM 00809386
		White	DLP WS/MITTEL/2244MM 00809394
		White	DLP WS/MITTEL/842MM 00809150
		White	DLP WS/START/1128MM 00809377
		White	DLP WS/START/1408MM 00809385
		White	DLP WS/START/2250MM 00809393
		White	DLP WS/START/848MM 00809149

Idoo Luminaire for daisy chaining White

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
14 W		White	ILP 840/D/WS/END/1128MM 00809312
16 W		White	ILP 840/D/WS/END/1408MM 00809355
24 W		White	ILP 840/D/WS/END/2250MM 00809365

11 W	White	ILP 840/D/WS/END/848MM 00809284
14 W	White	ILP 840/D/WS/MITTEL/1122MM 00809311
16 W	White	ILP 840/D/WS/MITTEL/1402MM 00809354
24 W	White	ILP 840/D/WS/MITTEL/2244MM 00809364
11 W	White	ILP 840/D/WS/MITTEL/842MM 00809283
14 W	White	ILP 840/D/WS/START/1128MM 00809310
16 W	White	ILP 840/D/WS/START/1408MM 00809353
24 W	White	ILP 840/D/WS/START/2250MM 00809363
11 W	White	ILP 840/D/WS/START/848MM 00809282

Dotoo Luminaire for daisy chaining Silver

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
		Silver	DLP SR/END/1128MM 00809383
		Silver	DLP SR/END/2250MM 00809399
		Silver	DLP SR/END/848MM 00809157
		Silver	DLP SR/MITTEL/1122MM 00809382
		Silver	DLP SR/MITTEL/2244MM 00809398
		Silver	DLP SR/MITTEL/842MM 00809155
		Silver	DLP SR/START/1128MM 00809381
		Silver	DLP SR/START/1408MM 00809389
		Silver	DLP SR/START/2250MM 00809397
		Silver	DLP SR/START/848MM 00809154
		Silver	DLP SR/MET/END/1408MM 00809391
		Silver	DLP SR/MET/MITTEL/1402MM 00809390

Idoo Luminaire for daisy chaining Silver

Fitted with Consumption	Technology Special feature	Color of luminaire	Model Order No.
----------------------------	-------------------------------	--------------------	--------------------

14 W	Silver	ILP 840/D/SR/END/1128MM 00809351
16 W	Silver	ILP 840/D/SR/END/1408MM 00809361
24 W	Silver	ILP 840/D/SR/END/2250MM 00809375
11 W	Silver	ILP 840/D/SR/END/848MM 00809288
14 W	Silver	ILP 840/D/SR/MITTEL/1122MM 00809350
16 W	Silver	ILP 840/D/SR/MITTEL/1402MM 00809360
24 W	Silver	ILP 840/D/SR/MITTEL/2244MM 00809374
11 W	Silver	ILP 840/D/SR/MITTEL/842MM 00809287
14 W	Silver	ILP 840/D/SR/START/1128MM 00809348
16 W	Silver	ILP 840/D/SR/START/1408MM 00809359
24 W	Silver	ILP 840/D/SR/START/2250MM 00809370
11 W	Silver	ILP 840/D/SR/START/848MM 00809286

Luminaire Housing Recessed Luminaires

White

Fitted with Power consumption	Operating device Connected load	Dimensions Special feature	Luminous flux	Model Order No.
				DLE WS/EINZEL/1134MM 00809444
				DLE WS/EINZEL/1414MM 00809445
				DLE WS/EINZEL/2256MM 00809446
				DLE WS/EINZEL/854MM 00809443

Light module



Microdownlights (MD)

- Precise shaping of the light beam using parallelised light beams with a sharp cut-off
- Application for targeted highlighting and visual emphasis of selected room areas

Microdownlights (MD)

White

Fitted with Power consumption	Operating device Connected load	Dimensions Special feature	Luminous flux	Model Order No.
LED 18 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 841mm	1950 lm	CVG 2000/840/D/WS/MD/35° 00809176
LED 18 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 841mm	2050 lm	CVG 2000/840/D/WS/MD/55° 00809186
LED 18 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 841mm	2150 lm	CVG 2000/840/D/WS/MD/75° 00809189
LED 25 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1121mm	2600 lm	CVG 2700/840/D/WS/MD/35° 00809194
LED 25 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1121mm	2750 lm	CVG 2700/840/D/WS/MD/55° 00809195
LED 25 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1121mm	2850 lm	CVG 2700/840/D/WS/MD/75° 00809196
LED 31 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1401mm	3250 lm	CVG 3500/840/D/WS/MD/35° 00809237
LED 31 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1401mm	3450 lm	CVG 3500/840/D/WS/MD/55° 00809238
LED 31 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1401mm	3600 lm	CVG 3500/840/D/WS/MD/75° 00809239



Wallwasher (WW)

- Precise cut-off that eliminates glare in adjacent room areas
- High uniformity of light distribution over the entire illuminated area
- Application for brightening and uniform accentuation

Wallwasher (WW)

Black

Fitted with Power consumption	Operating device Connected load	Dimensions Special feature	Luminous flux	Model Order No.
LED 19 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 841mm	2050 lm	CVG 2000/840/D/SW/WW 00809240
LED 26 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1121mm	2750 lm	CVG 2700/840/D/SW/WW 00809241
LED 32 W	Adjustable electronic ballast; digital DALI 220-240 V; 50/60 HZ	L = 1401mm	3450 lm	CVG 3500/840/D/SW/WW 00809242

Blind cover

Fitted with	Operating device	Dimensions	Luminous flux	Model
Power consumption	Connected load	Special feature		Order No.
		L=1122mm		CVA SR/1122MM 00809458
		L=1402mm		CVA SR/1402MM 00809459
		L=842mm		CVA SR/842MM 00809457
		L=1122mm		CVA WS/1122MM 00809455
		L=1402mm		CVA WS/1402MM 00809456
		L=842mm		CVA WS/842MM 00809340


Accessories

Ceiling Sensor KIRK		
	Designation	Order No.
	Ceiling Sensor	114420000-00809714
Surface mount adapter for Ceiling Sensor KIRK		
	Designation	Order No.
	Surface mount adapter	338299010-00808621

Suspended Luminaire IDOO.line



- Light line with direct and indirect light exit
- Efficiency-boosting reflection technology and conical prismatic screen with direct light component ensure standard-compliant uniform illumination
- Maintenance-friendly due to easy access to ballasts



Possible positions

White



ILP 2000/830/D
17 W / 2250 lm
L=854mm
00805709



ILP 2000/840/D
17 W / 2350 lm
L=854mm
00805671



ILP 3000/830/D
23 W / 3000 lm
L=1134mm
00805721



ILP 3000/840/D
23 W / 3150 lm
L=1134mm
00805673



ILP 4000/830/D
29 W / 3750 lm
L=1414mm
00805735



ILP 4000/840/D
29 W / 3950 lm
00805675



ILP 6000/830/D
46 W / 6000 lm
L=2256mm
00805744



ILP 6000/840/D
46 W / 6300 lm
L=2256mm
00805677



ILP 2000/VTL/D
23 W / 2300 lm
L=854mm
00806414



ILP 3000/VTL/D
32 W / 3150 lm
L=1134mm
00806448





ILP 4000/VTL/D
39 W / 3850 lm
L=1414mm
00806452



ILP 6000/VTL/D
63 W / 6150 lm
L=2256mm
00806456

Silver



ILP 2000/830/D
17 W / 2250 lm
L=854mm
00805716



ILP 2000/840/D
17 W / 2350 lm
L=854mm
00805672



ILP 3000/830/D
23 W / 3000 lm
L=1134mm
00805725



ILP 3000/840/D
23 W / 3150 lm
L=1134mm
00805674



ILP 4000/830/D



ILP 4000/840/D

29 W / 3750 lm
L=1414mm
00805739



29 W / 3950 lm
L=1414mm
00805676



ILP 6000/830/D
46 W / 6000 lm
L=2256mm
00805747



ILP 6000/840/D
46 W / 6300 lm
L=2256mm
00805678



ILP 2000/VTL/D
23 W / 2300 lm
L=854mm
00806460



ILP 3000/VTL/D
32 W / 3150 lm
L=1134mm
00806464



ILP 4000/VTL/D
39 W / 3850 lm
L=1414mm
00806468




ILP 6000/VTL/D
63 W / 6150 lm
L=2256mm
00806472



Suspended Luminaire DOTOO.line



- Light line with direct light exit
- Efficiency-boosting reflection technology and conical prismatic screen ensure standard-compliant uniform illumination
- Maintenance-friendly due to easy access to ballasts



Possible positions



White



DLP 1000/830/D
10 W / 1000 lm
L=854mm
00805797



DLP 1000/840/D
9,5 W / 1000 lm
L=854mm
00805772



DLP 1500/830/D
13 W / 1300 lm
L=1134mm
00805801



DLP 1500/840/D
13 W / 1350 lm
L=1134mm
00805776



DLP 2000/830/D
16 W / 1650 lm
L=1414mm
00805805



DLP 2000/840/D
16 W / 1700 lm
L=1414mm
00805780



DLP 3000/830/D
26 W / 2650 lm
L=2256mm
00805809



DLP 3000/840/D
26 W / 2750 lm
L=2256mm
00805784

Silver



DLP 1000/830/D
10 W / 1000 lm
L=854mm
00805839



DLP 1000/840/D
9,5 W / 1000 lm
L=854mm
00805796



DLP 1500/830/D
13 W / 1300 lm
L=1134mm
00805843



DLP 1500/840/D
13 W / 1350 lm
L=1134mm
00805821



DLP 2000/830/D
16 W / 1650 lm
L=1414mm
00805847



DLP 2000/840/D
16 W / 1700 lm
L=1414mm
00805825



DLP 3000/830/D
26 W / 2650 lm
L=2256mm
00805851




DLP 3000/840/D
26 W / 2750 lm
L=2256mm
00805829



Recessed Luminaire Dotoo.line



- Light line with direct light exit
- Efficiency-boosting reflection technology and conical prismatic screen ensure standard-compliant uniform illumination
- Maintenance-friendly due to easy access to ballasts

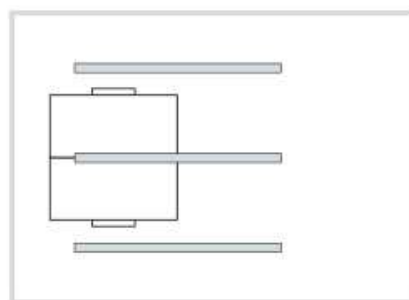

Possible positions

White



DLE 1000/830/D
10 W / 1000 lm
L=854mm
00808226



DLE 1000/840/D
9,5 W / 1000 lm
L=854mm
00808222



DLE 1500/830/D
13 W / 1300 lm
L=1134mm
00808227



DLE 1500/840/D
13 W / 1350 lm
L=1134mm
00808223



DLE 2000/830/D
16 W / 1650 lm
L=1414mm
00808228



DLE 2000/840/D
16 W / 1700 lm
L=1414mm
00808224



DLE 3000/830/D
26 W / 2650 lm
L=2256mm
00808229



DLE 3000/840/D
26 W / 2750 lm
L=2256mm
00808225

Accessories

Controller

	Designation	Technology	Order No.
	DALI MCU digital rotary dimmer	DALI	330686020 - 00812002

Presence detector

	Designation	Technology	Order No.	PDF
	IR-Quattro-HD-DALI	DALI	337821020 - 00695358	

Adaptor for Surface Mounting of Presence Detectors

	Designation	Order No.
	Adaptor	337821010 - 00695361

Remote Control for Presence Detector

	Designation	Technology	Order No.	PDF
	RC 5 DALI	Infrared	337822010 - 00695365	

Wall-Mounted Luminaire IDOO.line



- Light line with direct and indirect light exit
- Efficiency-boosting reflection technology and conical prismatic screen with direct light component ensure standard-compliant uniform illumination
- Maintenance-friendly due to easy access to ballasts



White



ILW 2000/830/D
17 W / 2250 lm
00808326



ILW 2000/840/D
17 W / 2350 lm
00808322



ILW 3000/830/D
23 W / 3000 lm
00808328



ILW 3000/840/D
23 W / 3150 lm
00808324

Silver



ILW 2000/830/D
17 W / 2250 lm
00808327



ILW 2000/840/D
17 W / 2350 lm
00808323



ILW 3000/830/D
23 W / 3000 lm
00808329



ILW 3000/840/D
23 W / 3150 lm
00808325

Accessories

Controller



DALI MCU digital rotary dimmer

Technology

DALI

Order No.

330686020 - 00812002

Presence detector

	Designation	Technology	Order No.	PDF
	IR-Quattro-HD-DALI	DALI	337821020 - 00695358	

Adaptor for Surface Mounting of Presence Detectors

	Designation	Order No.
	Adaptor	337821010 - 00695361


Remote Control for Presence Detector

	Designation	Technology	Order No.	PDF
	RC 5 DALI	Infrared	337822010 - 00695365	

Suspended Luminaire IDOO.line



- Light line with direct and indirect light exit
- Free and individual interlinking options, using different start, middle and end luminaires, allow individual design of continuous light lines.
- Mechanical and electrical connection of the individual modules without tools
- Start luminaire with mains connection
- Up to 18 m on one mains connection

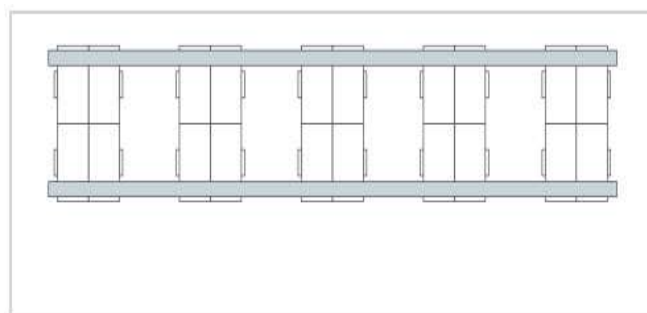

Possible positions



Start luminaire



ILP 2000/830/D
17 W / 2250 lm
L=848mm
00805710



ILP 2000/830/D
17 W / 2250 lm
L=848mm
00805717



ILP 2000/840/D
17 W / 2350 lm
L=848mm
00805680



ILP 2000/840/D
17 W / 2350 lm
L=848mm
00805683



ILP 3000/830/D
23 W / 3000 lm
L=1128mm
00805722



ILP 3000/830/D
23 W / 3000 lm
L=1128mm
00805726



ILP 3000/840/D
23 W / 3150 lm
L=1128mm
00805688



ILP 3000/840/D
23 W / 3150 lm
L=1128mm
00805691



ILP 4000/830/D
29 W / 3750 lm
L=1408mm
00805736



ILP 4000/830/D
29 W / 3750 lm
L=1408mm
00805740



ILP 4000/840/D
29 W / 3950 lm
L=1408mm
00805696




ILP 4000/840/D
29 W / 3950 lm
L=1408mm
00805699



ILP 6000/830/D
46 W / 6000 lm
L=2250mm
00805743



ILP 6000/830/D
46 W / 6000 lm
L=2250mm
00805748

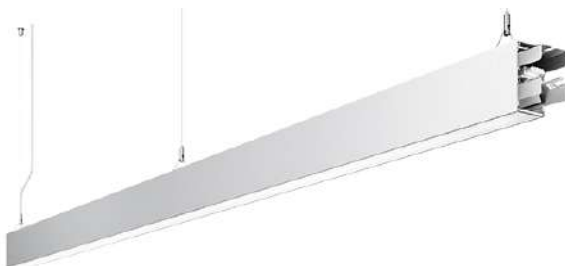

ILP 6000/840/D
46 W / 6300 lm
L=2250mm
00805702



ILP 6000/840/D
46 W / 6300 lm
L=2250mm
00805705



ILP 2000/VTL/D
23 W / 2300 lm
L=848mm
00806444



ILP 2000/VTL/D
23 W / 2300 lm
L=848mm
00806461



ILP 3000/VTL/D
32 W / 3150 lm
L=1128mm
00806449



ILP 3000/VTL/D
32 W / 3150 lm
L=1128mm
00806465



ILP 4000/VTL/D
39 W / 3850 lm
L=1408mm
00806453



ILP 4000/VTL/D
39 W / 3850 lm
L=1408mm
00806469



ILP 6000/VTL/D
63 W / 6150 lm
L=2250mm
00806457




ILP 6000/VTL/D
63 W / 6150 lm
L=2250mm
00806473

Middle luminaire




ILP 2000/830/D
17 W / 2250 lm
L=842mm
00805711

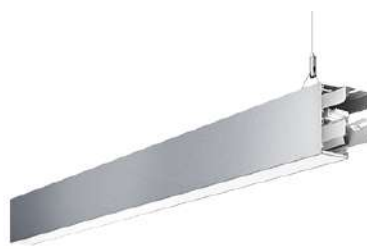

ILP 2000/830/D
17 W / 2250 lm
L=842mm
00805718



ILP 2000/840/D
17 W / 2350 lm
L=842mm
00805681

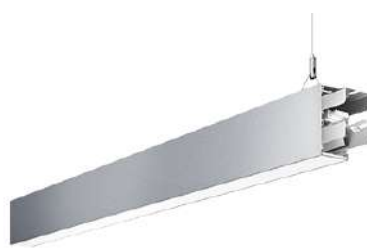

ILP 2000/840/D
17 W / 2350 lm
L=842mm
00805684



ILP 3000/830/D
23 W / 3000 lm
L=1122mm
00805723



ILP 3000/830/D
23 W / 3000 lm
L=1122mm
00805727



ILP 3000/840/D
23 W / 3150 lm



ILP 3000/840/D
23 W / 3150 lm

L=1122mm
00805689



L=1122mm
00805692



ILP 4000/830/D
29 W / 3750 lm
L=1402mm
00805737



ILP 4000/830/D
29 W / 3750 lm
L=1402mm
00805741



ILP 4000/840/D
29 W / 3950 lm
L=1402mm
00805697




ILP 4000/840/D
29 W / 3950 lm
L=1402mm
00805700



ILP 6000/830/D
46 W / 6000 lm
L=2244mm
00805745



ILP 6000/830/D
46 W / 6000 lm
L=2244mm
00805749

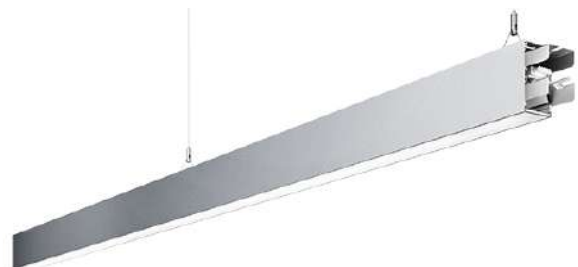

ILP 6000/840/D
46 W / 6300 lm
L=2244mm
00805703



ILP 6000/840/D
46 W / 6300 lm
L=2244mm
00805706





ILP 2000/VTL/D
23 W / 2300 lm
L=842mm
00806445



ILP 2000/VTL/D
23 W / 2300 lm
L=842mm
00806462



ILP 3000/VTL/D
32 W / 3150 lm
L=1122mm
00806450



ILP 3000/VTL/D
32 W / 3150 lm
L=1122mm
00806466



ILP 4000/VTL/D
39 W / 3850 lm
L=1402mm
00806454



ILP 4000/VTL/D
39 W / 3850 lm
L=1402mm
00806470



ILP 6000/VTL/D
63 W / 6150 lm
L=2244mm
00806458



ILP 6000/VTL/D
63 W / 6150 lm
L=2244mm
00806474



ILP 3000/830/D
23 W / 3000 lm
L=600mm
00807702



ILP 3000/830/D
23 W / 3000 lm
L=600mm
00807703



ILP 3000/830/D
23 W / 3000 lm
L=600mm
00807706



ILP 3000/830/D
23 W / 3000 lm
L=600mm
00807707



ILP 3000/840/D
23 W / 3150 lm
L=600mm
00807700



ILP 3000/840/D
23 W / 3150 lm
L=600mm
00807701



ILP 3000/840/D
23 W / 3150 lm
L=600mm
00807704



ILP 3000/840/D
23 W / 3150 lm
L=600mm
00807705



ILP 3000/VTL/D
32 W / 3150 lm
L=600mm
00807708



ILP 3000/VTL/D
32 W / 3150 lm
L=600mm
00807709



ILP 3000/VTL/D
32 W / 3150 lm
L=600mm
00807710



ILP 3000/VTL/D
32 W / 3150 lm
L=600mm
00807711

End luminaire



ILP 2000/830/D
17 W / 2250 lm
L=848mm
00805712



ILP 2000/830/D
17 W / 2250 lm
L=848mm
00805719



ILP 2000/840/D



ILP 2000/840/D

17 W / 2350 lm
L=848mm
00805682



17 W / 2350 lm
L=848mm
00805685



ILP 3000/830/D
23 W / 3000 lm
L=1128mm
00805724



ILP 3000/830/D
23 W / 3000 lm
L=1128mm
00805728



ILP 3000/840/D
23 W / 3150 lm
L=1128mm
00805690



ILP 3000/840/D
23 W / 3150 lm
L=1128mm
00805693



ILP 4000/830/D
29 W / 3750 lm
L=1408mm
00805738



ILP 4000/830/D
29 W / 3750 lm
L=1408mm
00805742



ILP 4000/840/D
29 W / 3950 lm
L=1408mm

ILP 4000/840/D
29 W / 3950 lm
L=1408mm

00805698



ILP 6000/830/D
46 W / 6000 lm
L=2250mm
00805746

00805701



ILP 6000/830/D
46 W / 6000 lm
L=2250mm
00805750



ILP 6000/840/D
46 W / 6300 lm
L=2250mm
00805704



ILP 6000/840/D
46 W / 6300 lm
L=2250mm
00805707



ILP 2000/VTL/D
23 W / 2300 lm
00806446



ILP 2000/VTL/D
23 W / 2300 lm
00806463



ILP 3000/VTL/D
32 W / 3150 lm
00806451



ILP 3000/VTL/D
32 W / 3150 lm
00806467



ILP 4000/VTL/D
39 W / 3850 lm
00806455



ILP 4000/VTL/D
39 W / 3850 lm
00806471




ILP 6000/VTL/D
63 W / 6150 lm
00806459




ILP 6000/VTL/D
63 W / 6150 lm
00806475


Suspended Luminaire DOTOO.line

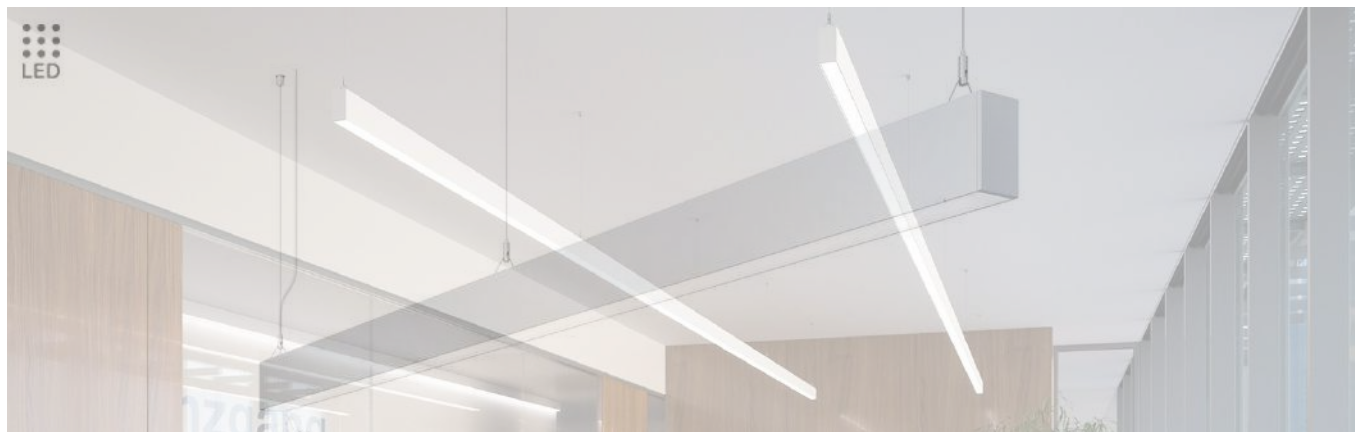

- Light line with direct light exit
- Free and individual interlinking options, using different start, middle and end luminaires, allow individual design of continuous light lines.
- Mechanical and electrical connection of the individual modules without tools
- Start luminaire with mains connection
- Up to 18 m on one mains connection

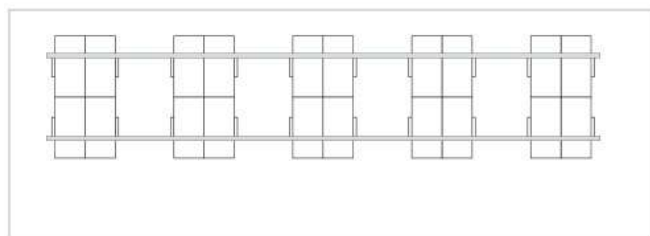

Possible positions



Start luminaire



DLP 1000/830/D
10 W / 1000 lm



DLP 1000/830/D
10 W / 1000 lm

L=848mm
00805840



L=848mm
00805798



DLP 1000/840/D
9,5 W / 1000 lm
L=848mm
00805813



DLP 1000/840/D
9,5 W / 1000 lm
L=848mm
00805773



DLP 1500/830/D
13 W / 1300 lm
L=1128mm
00805802



DLP 1500/830/D
13 W / 1300 lm
L=1128mm
00805844



DLP 1500/840/D
13 W / 1350 lm
L=1128mm
00805822



DLP 1500/840/D
13 W / 1350 lm
L=1128mm
00805777



DLP 2000/830/D
16 W / 1650 lm
L=1408mm
00805806



DLP 2000/830/D
16 W / 1650 lm
L=1408mm
00805848





DLP 2000/840/D
16 W / 1700 lm
L=1408mm
00805826




DLP 2000/840/D
16 W / 1700 lm
L=1408mm
00805781




DLP 3000/830/D
26 W / 2650 lm
L=2250mm
00805852



DLP 3000/830/D
26 W / 2650 lm
L=2250mm
00805810

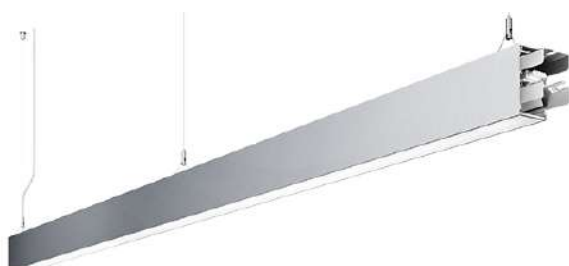

DLP 3000/840/D
26 W / 2750 lm
L=2250mm
00805830

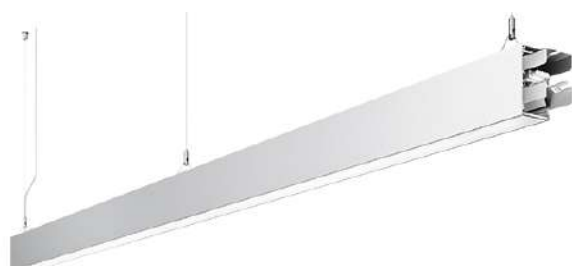


DLP 3000/840/D
26 W / 2750 lm
L=2250mm
00805785

Middle luminaire



DLP 1000/830/D

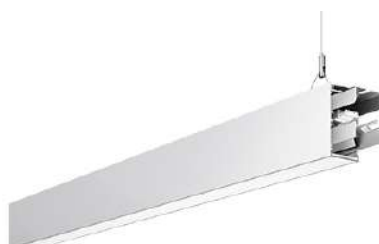

DLP 1000/830/D

10 W / 1000 lm
L=842mm
00805841



10 W / 1000 lm
L=842mm
00805799



DLP 1000/840/D
9,5 W / 1000 lm
L=842mm
00805814



DLP 1000/840/D
9,5 W / 1000 lm
L=842mm
00805774



DLP 1500/830/D
13 W / 1300 lm
L=1122mm
00805803



DLP 1500/830/D
13 W / 1300 lm
L=1122mm
00805845



DLP 1500/840/D
13 W / 1350 lm
L=1122mm
00805823



DLP 1500/840/D
13 W / 1350 lm
L=1122mm
00805778



DLP 2000/830/D
16 W / 1650 lm
L=1402mm



DLP 2000/830/D
16 W / 1650 lm
L=1402mm



00805807



00805849



DLP 2000/840/D
16 W / 1700 lm
L=1402mm
00805827



DLP 2000/840/D
16 W / 1700 lm
L=1402mm
00805782



DLP 3000/830/D
26 W / 2650 lm
L=2244mm
00805811



DLP 3000/830/D
26 W / 2650 lm
L=2244mm
00805853



DLP 3000/840/D
26 W / 2750 lm
L=2244mm
00805831



DLP 3000/840/D
26 W / 2750 lm
L=2244mm
00805786



DLP 1500/830/D
13 W / 1300 lm
L=600mm
00807694



DLP 1500/830/D
13 W / 1300 lm
L=600mm
00807695





DLP 1500/830/D
13 W / 1300 lm
L=600mm
00807698



DLP 1500/830/D
13 W / 1300 lm
L=600mm
00807699



DLP 1500/840/D
13 W / 1350 lm
L=600mm
00807692



DLP 1500/840/D
13 W / 1350 lm
L=600mm
00807693



DLP 1500/840/D
13 W / 1350 lm
L=600mm
00807696



DLP 1500/840/D
13 W / 1350 lm
L=600mm
00807697

End luminaire



DLP 1000/830/D



DLP 1000/830/D

10 W / 1000 lm
L=848mm
00805842



10 W / 1000 lm
L=848mm
00805800



DLP 1000/840/D
9,5 W / 1000 lm
L=848mm
00805815



DLP 1000/840/D
9,5 W / 1000 lm
L=848mm
00805775



DLP 1500/830/D
13 W / 1300 lm
L=1128mm
00805804



DLP 1500/830/D
13 W / 1300 lm
L=1128mm
00805846




DLP 1500/840/D
13 W / 1350 lm
L=1128mm
00805824




DLP 1500/840/D
13 W / 1350 lm
L=1128mm
00805779



DLP 2000/830/D
16 W / 1650 lm
L=1408mm

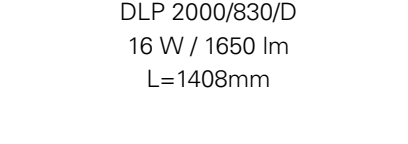

DLP 2000/830/D
16 W / 1650 lm
L=1408mm

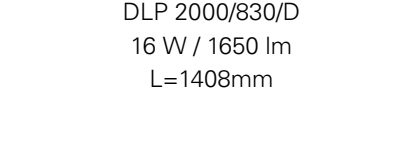

00805808



00805850



DLP 2000/840/D
16 W / 1700 lm
L=1408mm
00805828



DLP 2000/840/D
16 W / 1700 lm
L=1408mm
00805783



DLP 3000/830/D
26 W / 2650 lm
L=2250mm
00805812



DLP 3000/830/D
26 W / 2650 lm
L=2250mm
00805854



DLP 3000/840/D
26 W / 2750 lm
L=2250mm
00805832




DLP 3000/840/D
26 W / 2750 lm
L=2250mm
00805787




Surface-Mounted Luminaire DOTOO.line



- Light line with direct light exit
- Free and individual interlinking options, using different start, middle and end luminaires, allow individual design of continuous light lines.
- Mechanical and electrical connection of the individual modules without tools
- Start luminaire with mains connection
- Up to 18 m on one mains connection

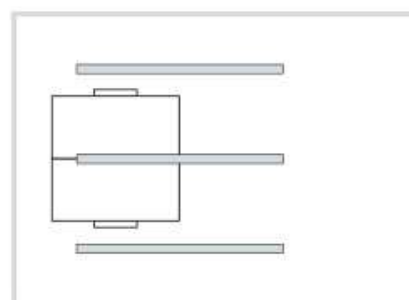

Possible positions



Start luminaire



DLA 1000/830/D
10 W / 1000 lm
L=848mm
00807937



DLA 1000/830/D
10 W / 1000 lm
L=848mm
00807961



DLA 1000/840/D
9,5 W / 1000 lm
L=848mm
00807925



DLA 1000/840/D
9,5 W / 1000 lm
L=848mm
00807949



DLA 1500/830/D
13 W / 1300 lm
L=1128mm
00807940



DLA 1500/830/D
13 W / 1300 lm
L=1128mm
00807964



DLA 1500/840/D
13 W / 1350 lm
L=1128mm
00807928



DLA 1500/840/D
13 W / 1350 lm
L=1128mm
00807952



DLA 2000/830/D
16 W / 1650 lm
L=1408mm
00807943



DLA 2000/830/D
16 W / 1650 lm
L=1408mm
00807967



DLA 2000/840/D
16 W / 1700 lm
L=1408mm
00807931




DLA 2000/840/D
16 W / 1700 lm
L=1408mm
00807955



DLA 3000/830/D
26 W / 2650 lm
L=2250mm
00807946



DLA 3000/830/D
26 W / 2650 lm
L=2250mm
00807970

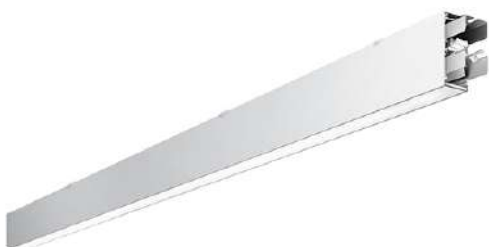

DLA 3000/840/D
26 W / 2750 lm
L=2250mm
00807934



DLA 3000/840/D
26 W / 2750 lm
L=2250mm
00807958

Middle luminaire



DLA 1000/830/D
10 W / 1000 lm
L=842mm
00807938



DLA 1000/830/D
10 W / 1000 lm
L=842mm
00807962



DLA 1000/840/D
9,5 W / 1000 lm
L=842mm
00807926



DLA 1000/840/D
9,5 W / 1000 lm
L=842mm
00807950



DLA 1500/830/D
13 W / 1300 lm
L=1122mm
00807941



DLA 1500/830/D
13 W / 1300 lm
L=1122mm
00807965



DLA 1500/840/D
13 W / 1350 lm
L=1122mm
00807929



DLA 1500/840/D
13 W / 1350 lm
L=1122mm
00807953



DLA 2000/830/D
16 W / 1650 lm
L=1402mm
00807944




DLA 2000/830/D
16 W / 1650 lm
L=1402mm
00807968



DLA 2000/840/D
16 W / 1700 lm
L=1402mm
00807932



DLA 2000/840/D
16 W / 1700 lm
L=1402mm
00807956

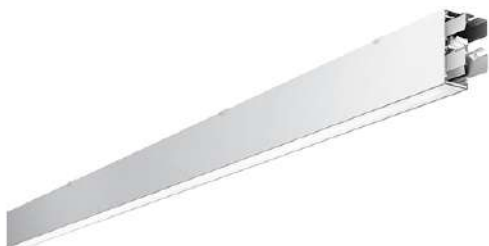

DLA 3000/830/D
26 W / 2650 lm
L=2244mm
00807947



DLA 3000/830/D
26 W / 2650 lm
L=2244mm
00807971



DLA 3000/840/D
26 W / 2750 lm
L=2244mm
00807935



DLA 3000/840/D
26 W / 2750 lm
L=2244mm
00807959

End luminaire



DLA 1000/830/D
10 W / 1000 lm
L=848mm
00807939



DLA 1000/830/D
10 W / 1000 lm
L=848mm
00807963



DLA 1000/840/D
9,5 W / 1000 lm
L=848mm
00807927



DLA 1000/840/D
9,5 W / 1000 lm
L=848mm
00807951



DLA 1500/830/D
13 W / 1300 lm
L=1128mm
00807942



DLA 1500/830/D
13 W / 1300 lm
L=1128mm
00807966



DLA 1500/840/D
13 W / 1350 lm
L=1128mm
00807930



DLA 1500/840/D
13 W / 1350 lm
L=1128mm
00807954



DLA 2000/830/D
16 W / 1650 lm
L=1408mm
00807945



DLA 2000/830/D
16 W / 1650 lm
L=1408mm
00807969



DLA 2000/840/D
16 W / 1700 lm
L=1408mm
00807933



DLA 2000/840/D
16 W / 1700 lm
L=1408mm
00807957



DLA 3000/830/D
26 W / 2650 lm
L=2250mm
00807948



DLA 3000/830/D
26 W / 2650 lm
L=2250mm
00807972



DLA 3000/840/D
26 W / 2750 lm
L=2250mm
00807936



DLA 3000/840/D
26 W / 2750 lm
L=2250mm
00807960

Accessories

Controller



DALI MCU digital rotary dimmer

Technology

DALI

Order No.

330686020 - 00812002

Presence detector



IR-Quattro-HD-DALI

Technology

DALI

Order No.

337821020 - 00695358

PDF



Adaptor for Surface Mounting of Presence Detectors

	Designation	Order No.
	Adaptor	337821010 - 00695361



Remote Control for Presence Detector

	Designation	Technology	Order No.	PDF
	RC 5 DALI	Infrared	337822010 - 00695365	

Suspended luminaire IDOO.line

ILP 2000/830/D

114162000-00805709

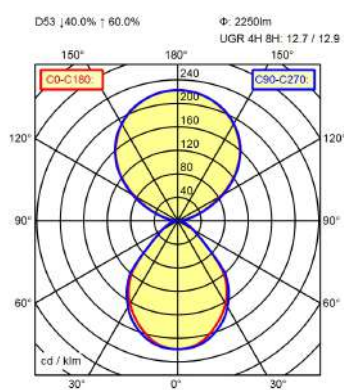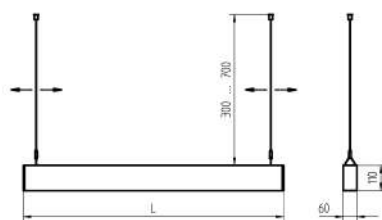

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,970

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024406

ca. 3,3 kg; 4,2 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/840/D

114130000-00805671

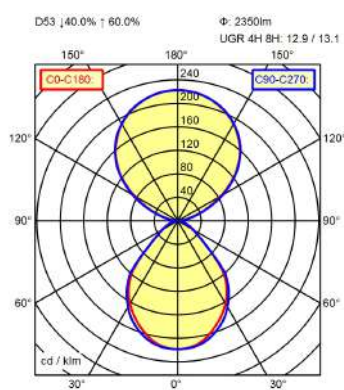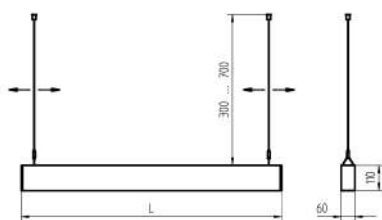

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,970

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330020729

ca. 3,3 kg; 4,2 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/830/D

114170000-00805721

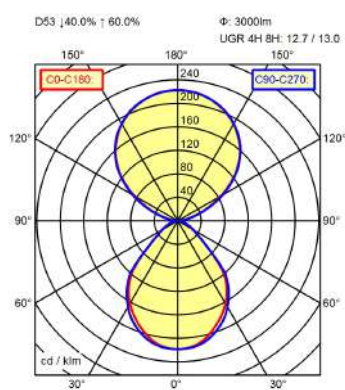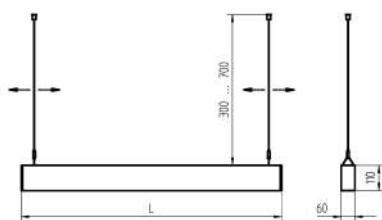

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330026721

ca. 4,1 kg; 5,3 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/840/D

114132000-00805673

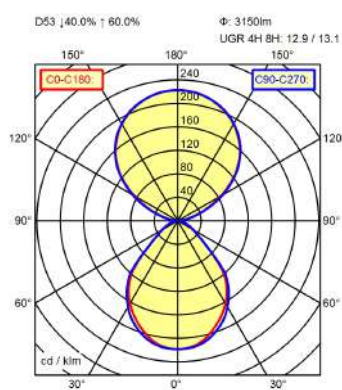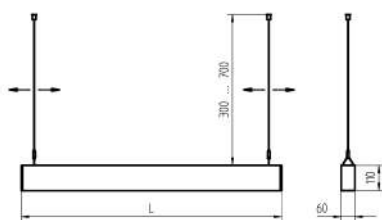

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330020798

ca. 4,1 kg; 5,3 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 4000/830/D

114178000-00805735

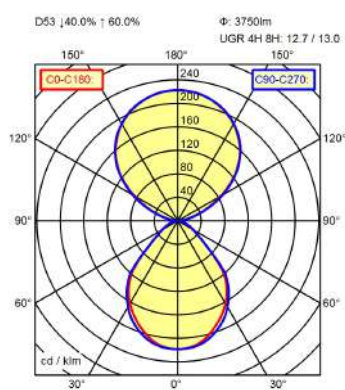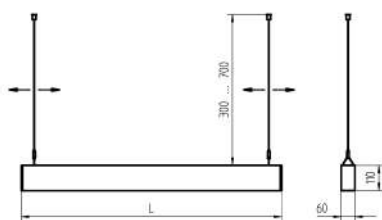

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330028503

ca. 4,9 kg; 6,4 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 4000/840/D

114134000-00805675

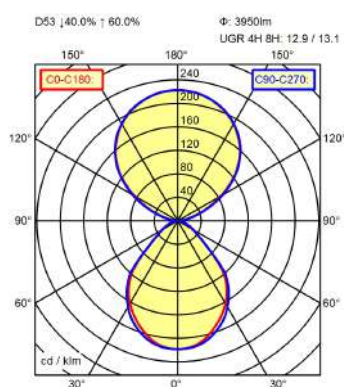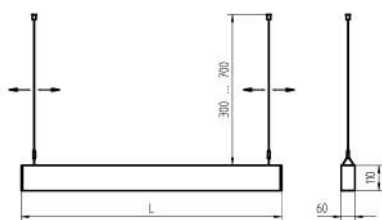

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021016

ca. 4,9 kg; 6,4 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/830/D

114187000-00805744

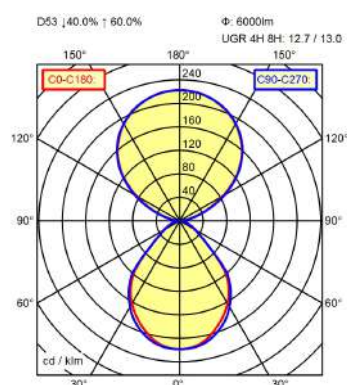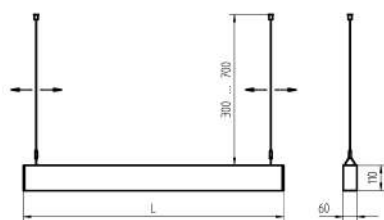

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030308

ca. 7,5 kg; 9,8 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/840/D

114136000-00805677

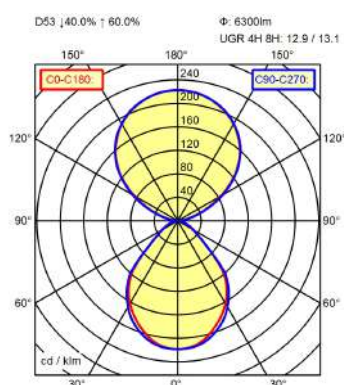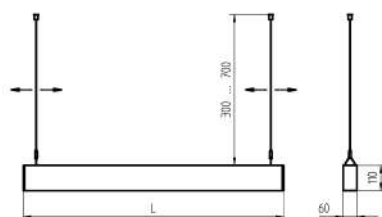

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021115

ca. 7,5 kg; 9,8 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114278000-00806414

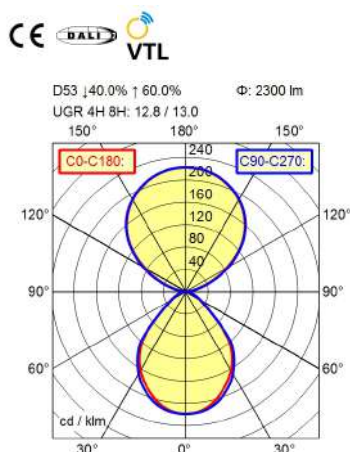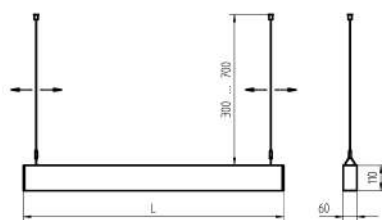

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Structured; Plastic

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330036881

ca. 3,4 kg; 4,4 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114282000-00806448

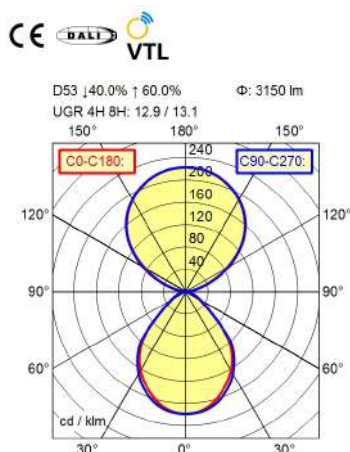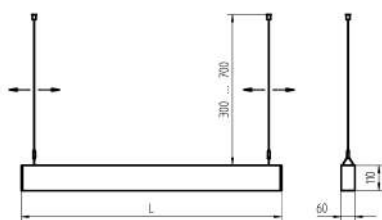

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330037734

ca. 4,2 kg; 5,4 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114286000-00806452

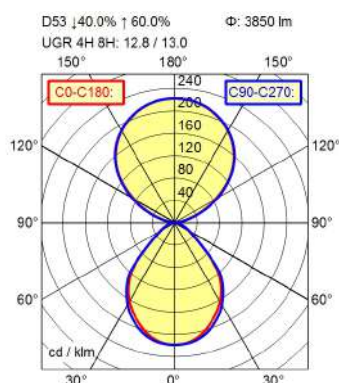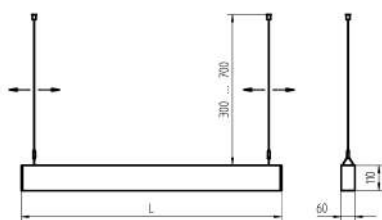

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038755

ca. 5,1 kg; 6,6 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114290000-00806456

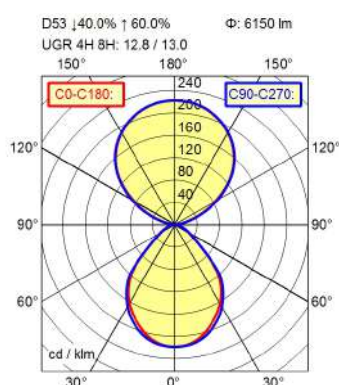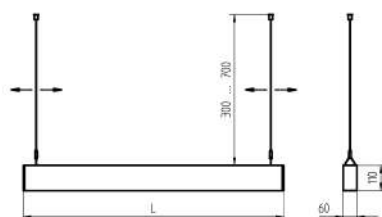

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038793

ca. 8 kg; 10,3 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114166000-00805716

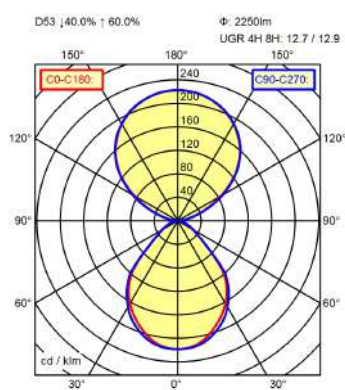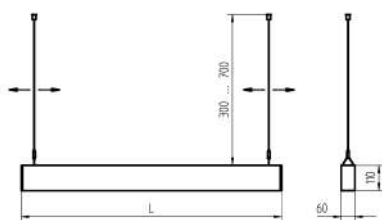

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,970

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024734

ca. 3,3 kg; 4,2 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/840/D

114131000-00805672

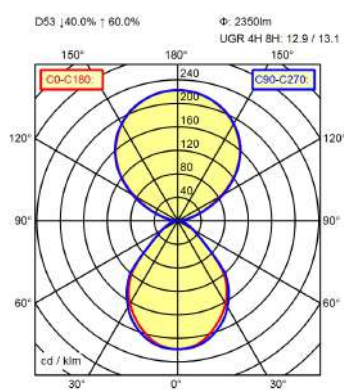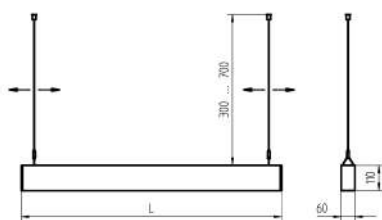

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330020774

ca. 3,3 kg; 4,2 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/830/D

114174000-00805725

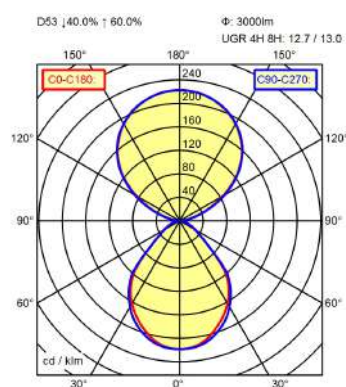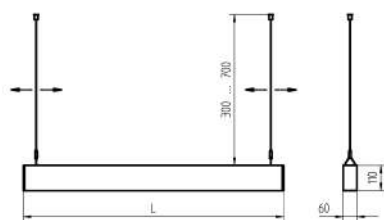

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330027957

ca. 4,1 kg; 5,3 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/840/D

114133000-00805674

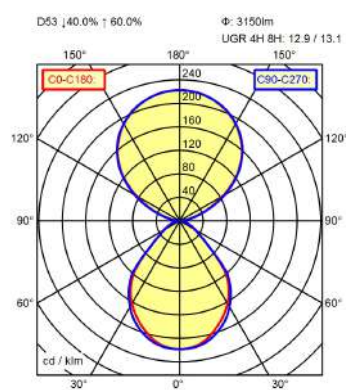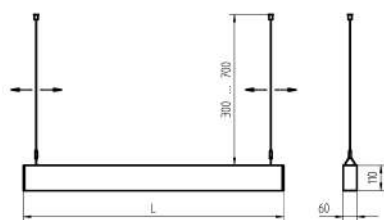

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330020811

ca. 4,1 kg; 5,3 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 4000/830/D

114182000-00805739

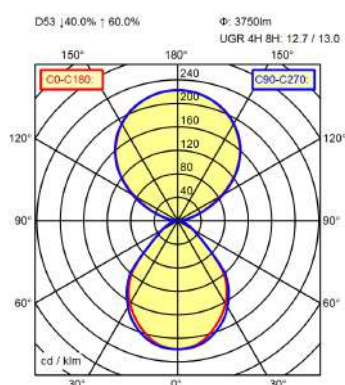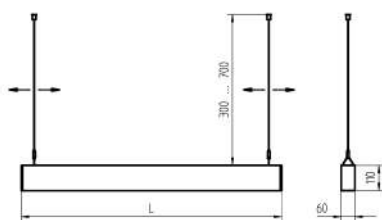

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330029876

ca. 4,9 kg; 6,4 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 4000/840/D

114135000-00805676

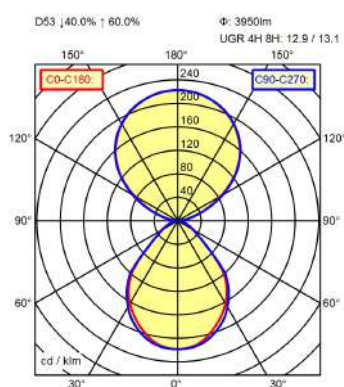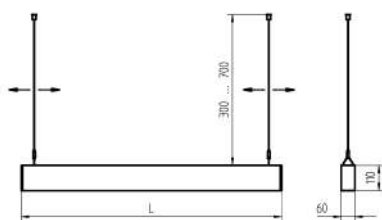

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021061

ca. 4,9 kg; 6,4 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/830/D

114190000-00805747

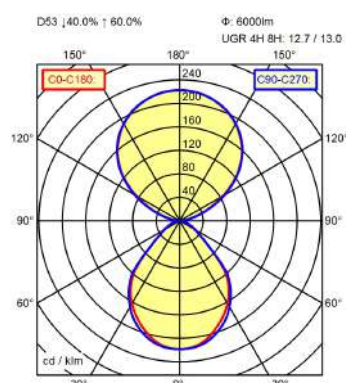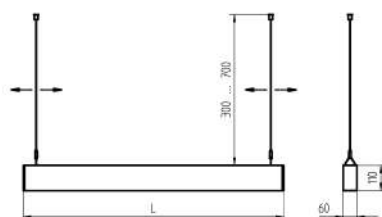

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030568

ca. 7,5 kg; 9,8 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/840/D

114137000-00805678

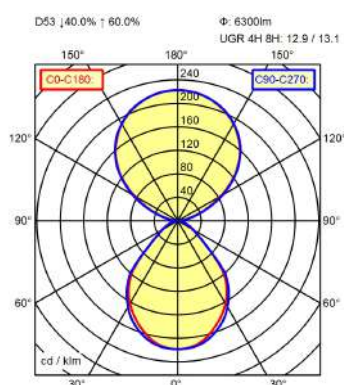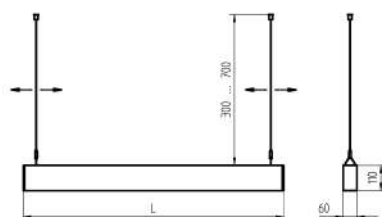

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021139

ca. 7,5 kg; 9,8 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114294000-00806460

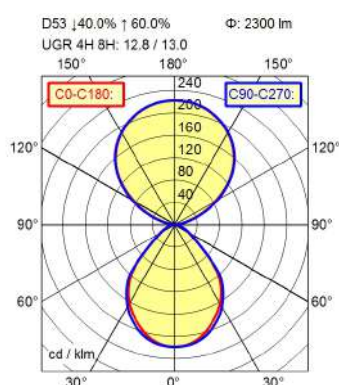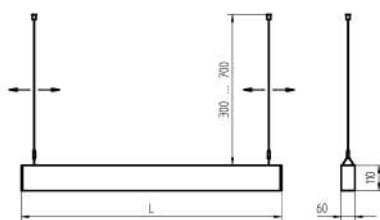

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039042

ca. 3,4 kg; 4,4 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114298000-00806464

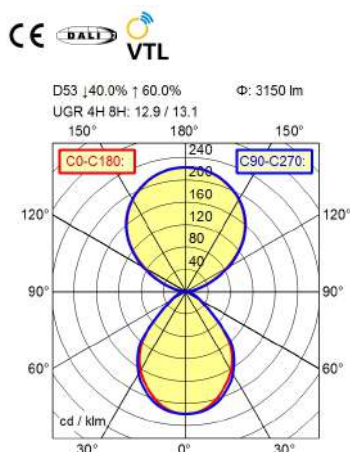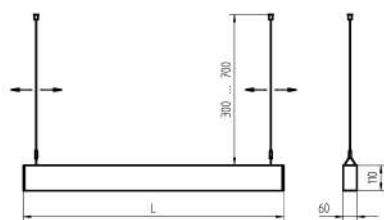

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039455

ca. 4,2 kg; 5,4 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114302000-00806468

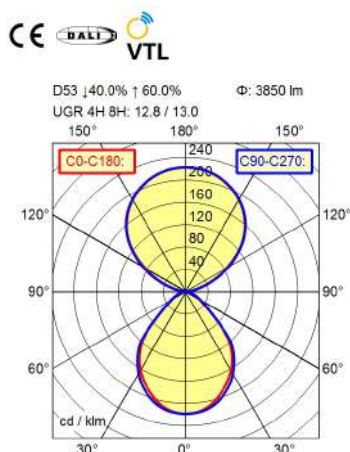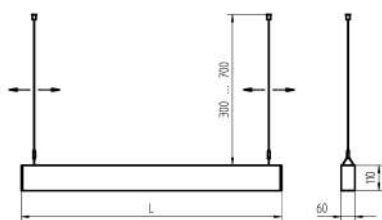

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039967

ca. 5,1 kg; 6,6 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114306000-00806472

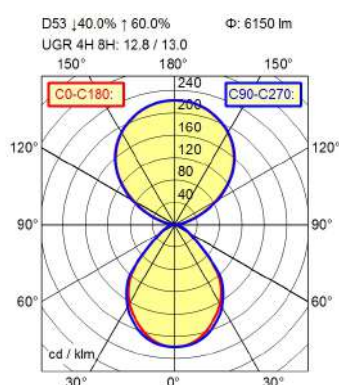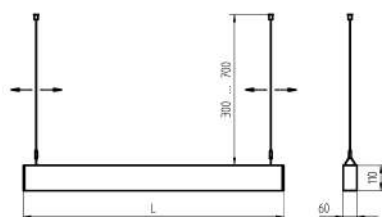

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330040611

ca. 8 kg; 10,3 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 1000/830/D

114210000-00805797

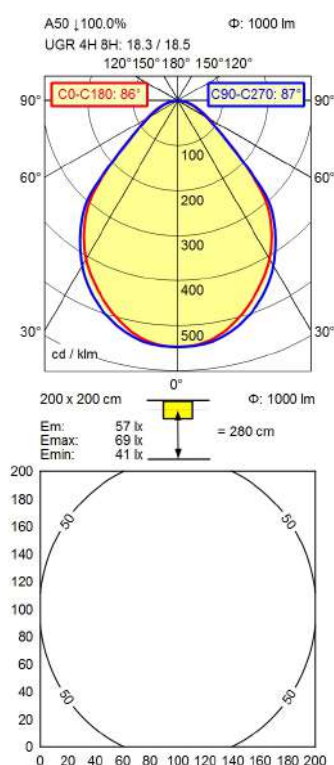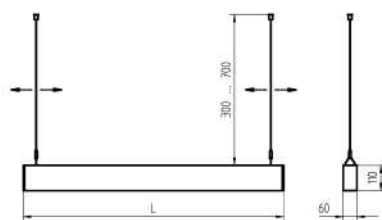

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 10 W

ca. 0,2 W

env. 0,970

approx. 1.000 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330032906

ca. 3,1 kg; 4,1 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 1000/840/D

114194000-00805772

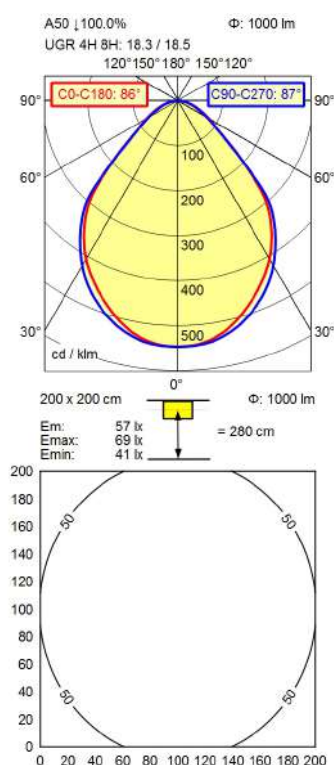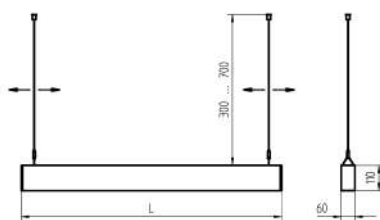

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 9,5 W

ca. 0,2 W

env. 0,970

approx. 1.000 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030865

ca. 3,1 kg; 4,1 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 1500/830/D

114214000-00805801

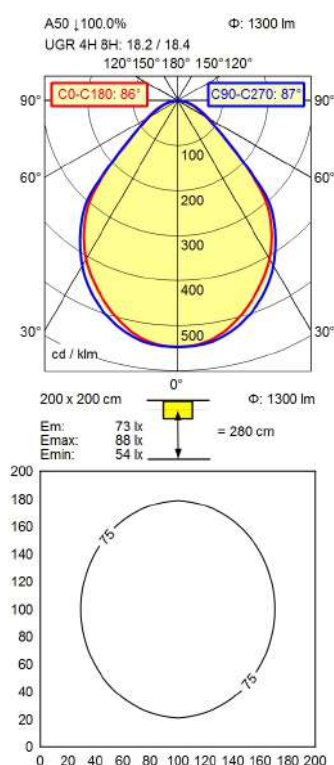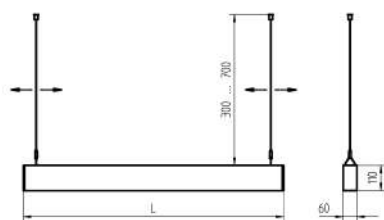

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,970

approx. 1.300 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330032968

ca. 3,9 kg; 5,1 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 1500/840/D

114198000-00805776

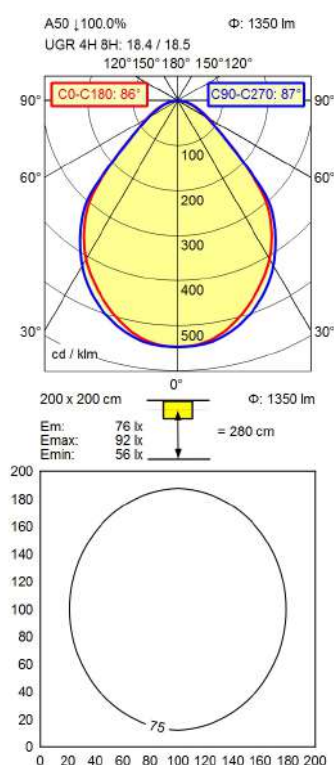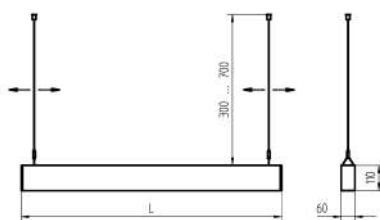

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,970

approx. 1.350 lm

approx. 103 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330031688

ca. 3,9 kg; 5,1 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 2000/830/D

114218000-00805805

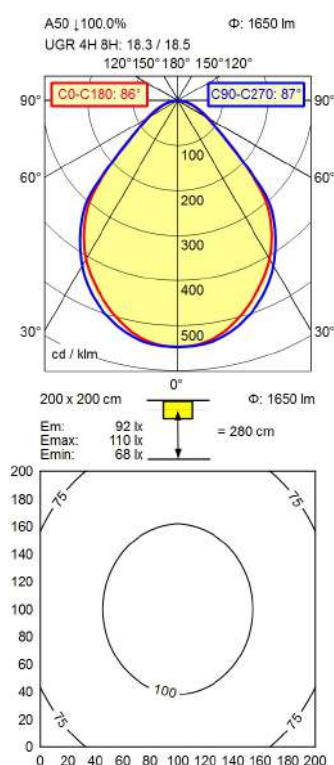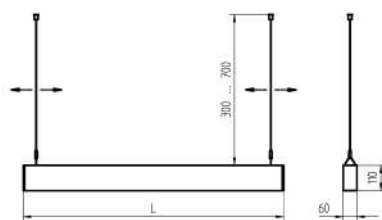

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,15 W

env. 0,98

approx. 1.650 lm

approx. 103 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330033392

ca. 4,7 kg; 6,2 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 2000/840/D

114202000-00805780

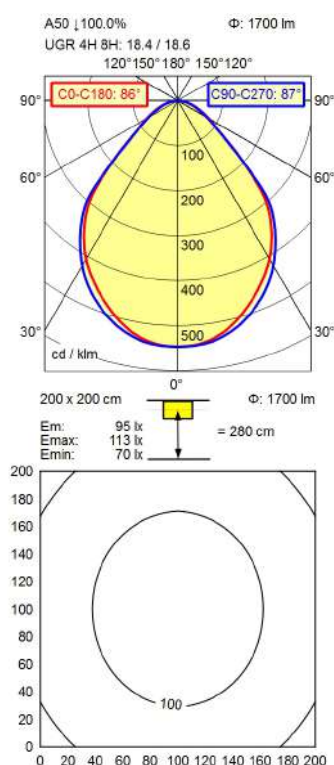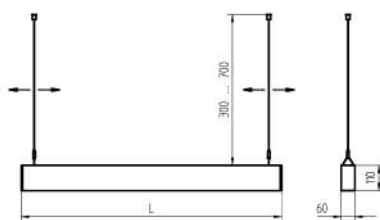

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,15 W

env. 0,98

approx. 1.700 lm

approx. 106 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330031794

ca. 4,7 kg; 6,2 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 3000/830/D

114222000-00805809

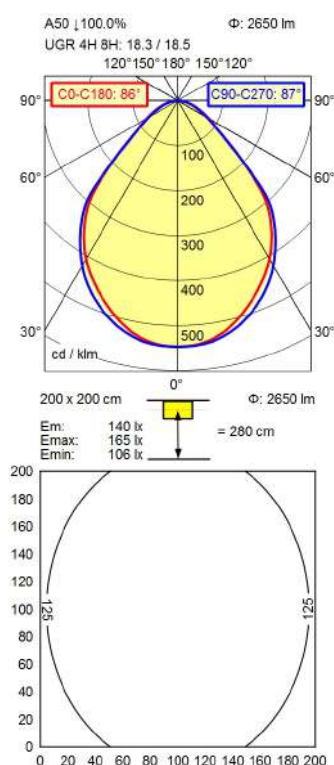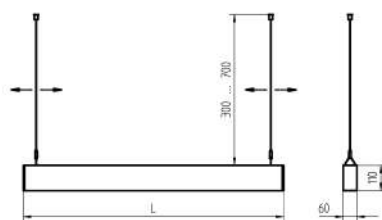

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,15 W

env. 0,980

approx. 2.650 lm

approx. 101 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330034160

ca. 7,3 kg; 9,6 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 3000/840/D

114206000-00805784

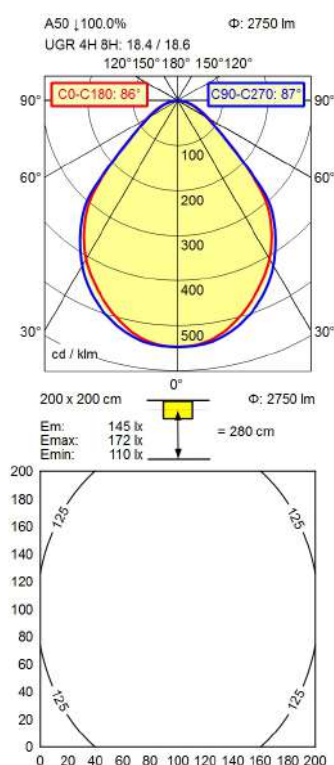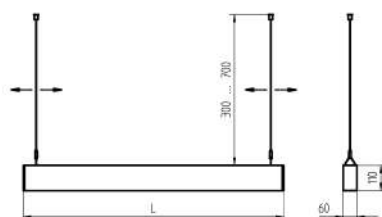

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,15 W

env. 0,980

approx. 2.750 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330032531

ca. 7,3 kg; 9,6 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 1000/830/D

114242000-00805839

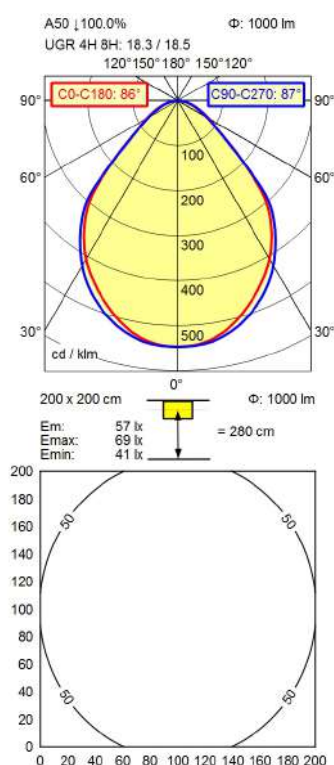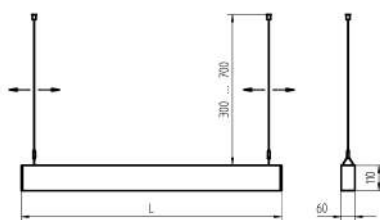

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 10 W

ca. 0,2 W

env. 0,970

approx. 1.000 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330035839

ca. 3,1 kg; 4,1 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 1000/840/D

114226000-00805796

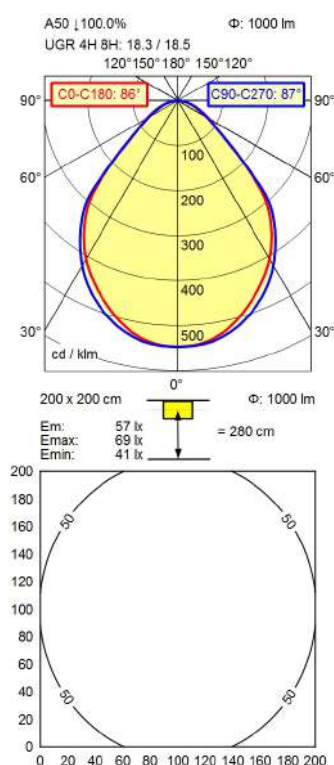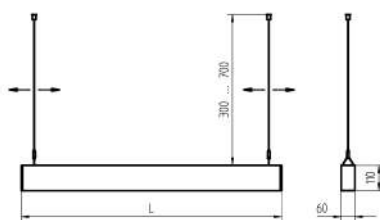

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 9,5 W

ca. 0,2 W

env. 0,970

approx. 1.000 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330032890

ca. 3,1 kg; 4,1 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 1500/830/D

114246000-00805843

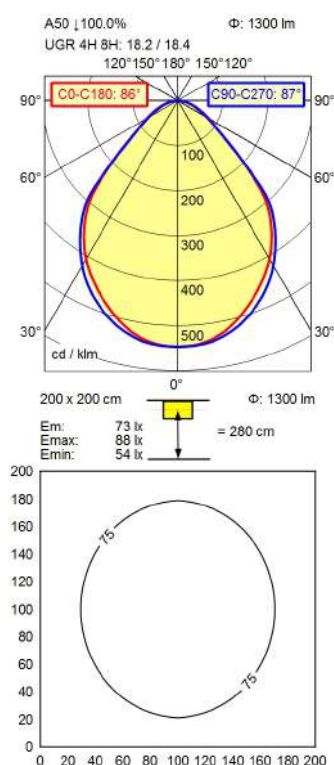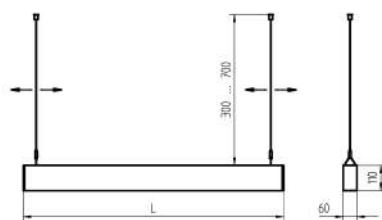

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,970

approx. 1.300 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330036348

ca. 3,9 kg; 5,1 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 1500/840/D

114230000-00805821

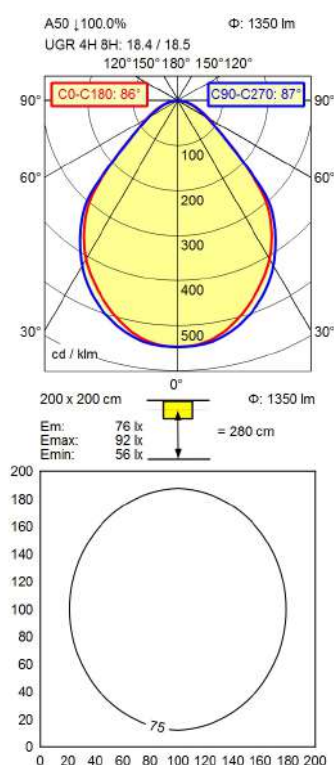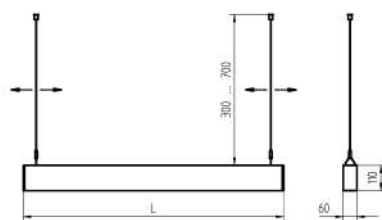

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,970

approx. 1.350 lm

approx. 103 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330034245

ca. 3,9 kg; 5,1 kg

L=1134mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 2000/830/D

114251000-00805847

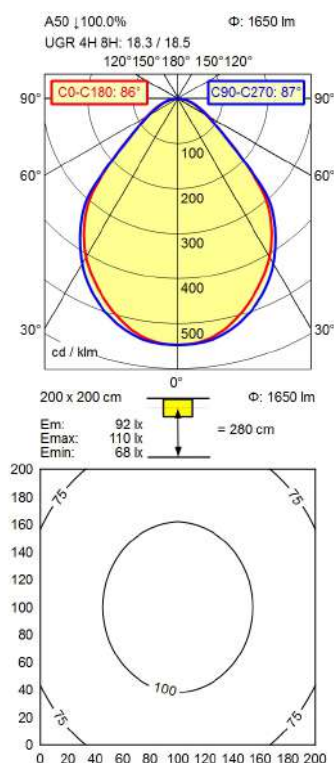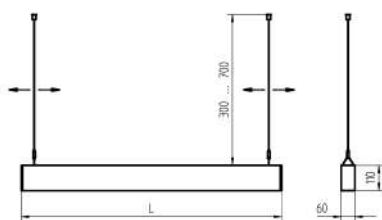

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,15 W

env. 0,98

approx. 1.650 lm

approx. 103 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330036652

ca. 4,7 kg; 6,2 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 2000/840/D

114234000-00805825

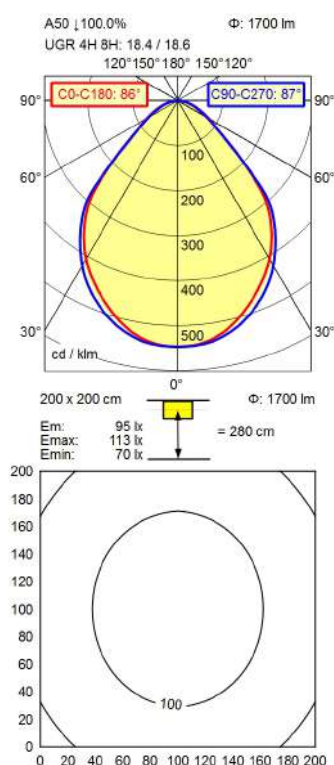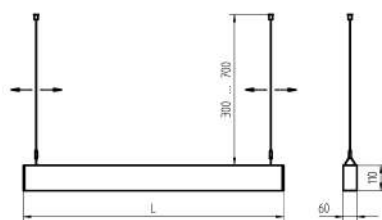

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,15 W

env. 0,98

approx. 1.700 lm

approx. 106 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330034337

ca. 4,7 kg; 6,2 kg

L=1414mm

ca. 1.600 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire DOTOO.line

DLP 3000/830/D

114255000-00805851

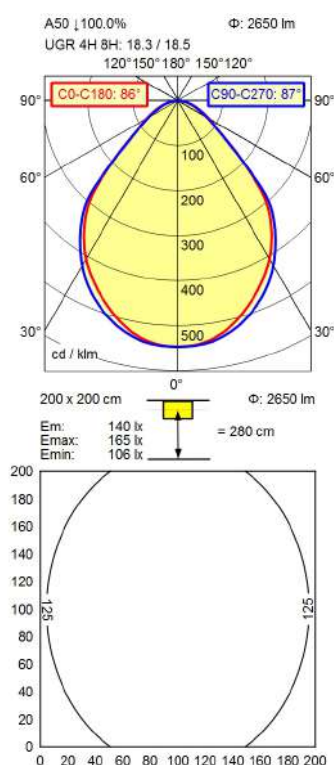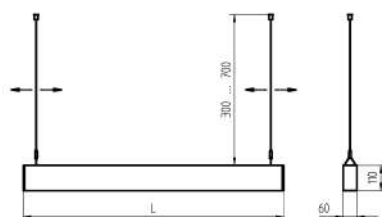

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,15 W

env. 0,980

approx. 2.650 lm

approx. 101 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330036799

ca. 7,3 kg; 9,6 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire DOTOO.line

DLP 3000/840/D

114238000-00805829

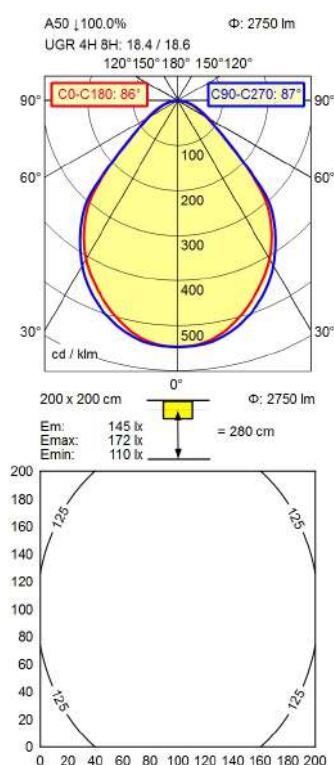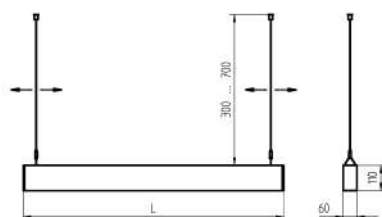

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,15 W

env. 0,980

approx. 2.750 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330034757

ca. 7,3 kg; 9,6 kg

L=2256mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Recessed luminaire DOTOO.line

DLE 1000/830/D

114408000-00808226

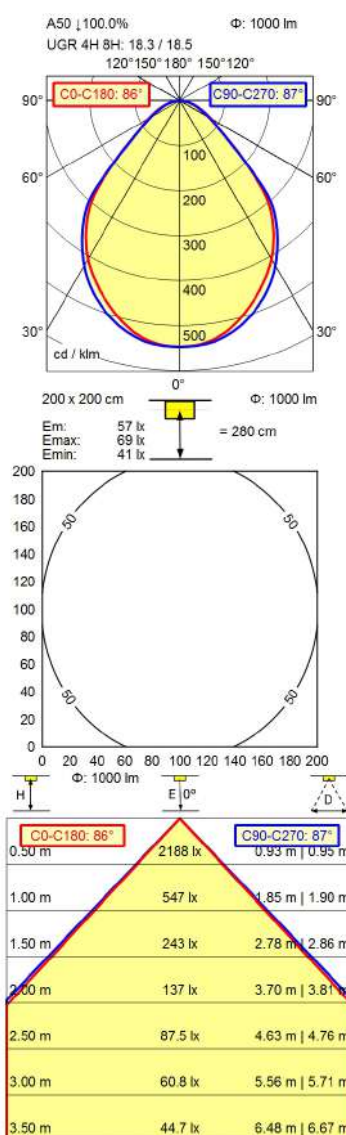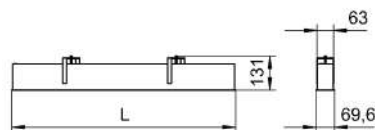

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 10 W

ca. 0,2 W

env. 0,97

approx. 1.000 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079802

ca. 3,1 kg; 3,5 kg

L=854mm

ca. 990 mm; 190 mm; 115 mm





Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 1000/840/D

114404000-00808222

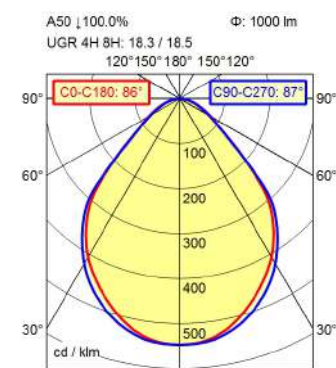

H	Φ : 1000 lm	E 0°	D
0.50 m	C0-C180: 86° 2188 lx C90-C270: 87° 0.93 m 0.95 m		
1.00 m	547 lx 1.85 m 1.90 m		
1.50 m	243 lx 2.78 m 2.86 m		
2.00 m	137 lx 3.70 m 3.81 m		
2.50 m	87.5 lx 4.63 m 4.76 m		
3.00 m	60.8 lx 5.56 m 5.71 m		
3.50 m	44.7 lx 6.48 m 6.67 m		

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 9,5 W

ca. 0,2 W

env. 0,97

approx. 1.000 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079116

ca. 3,1 kg; 3,5 kg

L=854mm

ca. 990 mm; 190 mm; 115 mm




Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 1500/830/D

114409000-00808227

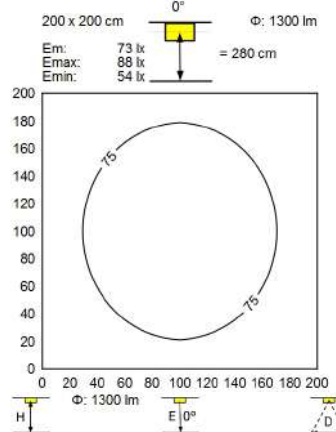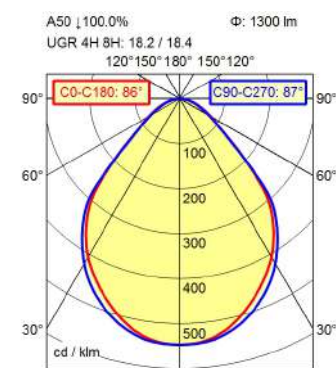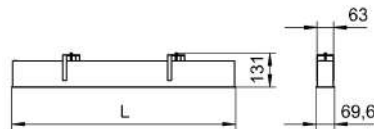

H	Φ : 1300 lm	E 0°	D
0.50 m	C0-C180: 86° 2844 lx C90-C270: 87° 0.93 m 0.95 m		
1.00 m	711 lx 1.85 m 1.90 m		
1.50 m	316 lx 2.78 m 2.86 m		
2.00 m	178 lx 3.70 m 3.81 m		
2.50 m	114 lx 4.63 m 4.76 m		
3.00 m	79.0 lx 5.56 m 5.71 m		
3.50 m	58.0 lx 6.48 m 6.67 m		

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,97

approx. 1.300 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079833

ca. 3,9 kg; 4,3 kg

L=1134mm

ca. 1.300 mm; 195 mm; 115 mm





Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 1500/840/D

114405000-00808223

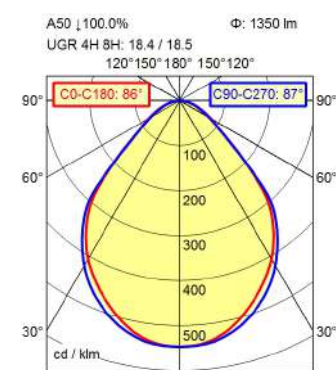

H	Φ : 1350 lm	E 0°	D
0.50 m	C0-C180: 86° 2954 lx C90-C270: 87° 0.93 m 0.95 m		
1.00 m	738 lx 1.85 m 1.90 m		
1.50 m	328 lx 2.78 m 2.86 m		
2.00 m	185 lx 3.70 m 3.81 m		
2.50 m	118 lx 4.63 m 4.76 m		
3.00 m	82.0 lx 5.56 m 5.71 m		
3.50 m	60.3 lx 6.48 m 6.67 m		

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 13 W

ca. 0,2 W

env. 0,97

approx. 1.350 lm

approx. 103 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079123

ca. 3,9 kg; 4,3 kg

L=1134mm

ca. 1.300 mm; 195 mm; 115 mm






Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 2000/830/D

114410000-00808228

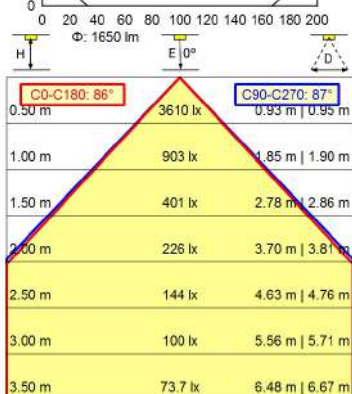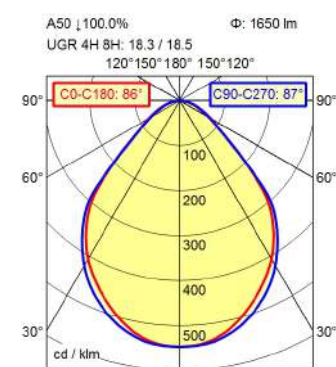

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,2 W

env. 0,97

approx. 1.650 lm

approx. 103 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330080143

ca. 4,7 kg; 5,2 kg

L=1414mm





Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 2000/840/D

114406000-00808224

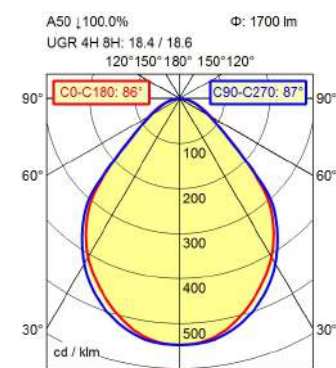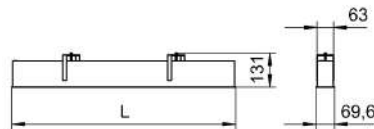

H	Φ : 1700 lm	E 0°	D
0.50 m	C0-C180: 86° C90-C270: 87°	3719 lx	0.93 m 0.95 m
1.00 m		930 lx	1.85 m 1.90 m
1.50 m		413 lx	2.78 m 2.86 m
2.00 m		232 lx	3.70 m 3.81 m
2.50 m		149 lx	4.63 m 4.76 m
3.00 m		103 lx	5.56 m 5.71 m
3.50 m		75.9 lx	6.48 m 6.67 m

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 16 W

ca. 0,2 W

env. 0,97

approx. 1.700 lm

approx. 106 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079321

ca. 4,7 kg; 5,2 kg

L=1414mm





Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 3000/830/D

114411000-00808229

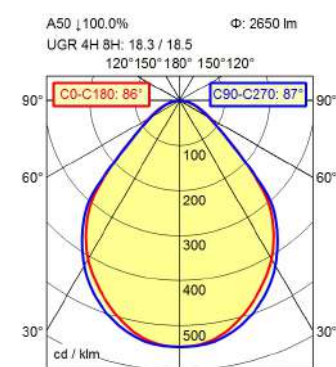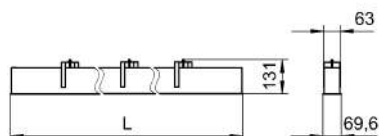

H	Φ : 2650 lm	E 0°	D
0.50 m	C0-C180: 86° C90-C270: 87°	5798 lx	0.93 m 0.95 m
1.00 m		1450 lx	1.85 m 1.90 m
1.50 m		644 lx	2.78 m 2.86 m
2.00 m		362 lx	3.70 m 3.81 m
2.50 m		232 lx	4.63 m 4.76 m
3.00 m		161 lx	5.56 m 5.71 m
3.50 m		118 lx	6.48 m 6.67 m

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,2 W

env. 0,97

approx. 2.650 lm

approx. 101 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330080310

ca. 7,3 kg; 7,8 kg

L=2256mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear
²⁾ Higher degree of protection when installed.

Recessed luminaire DOTOO.line

DLE 3000/840/D

114407000-00808225

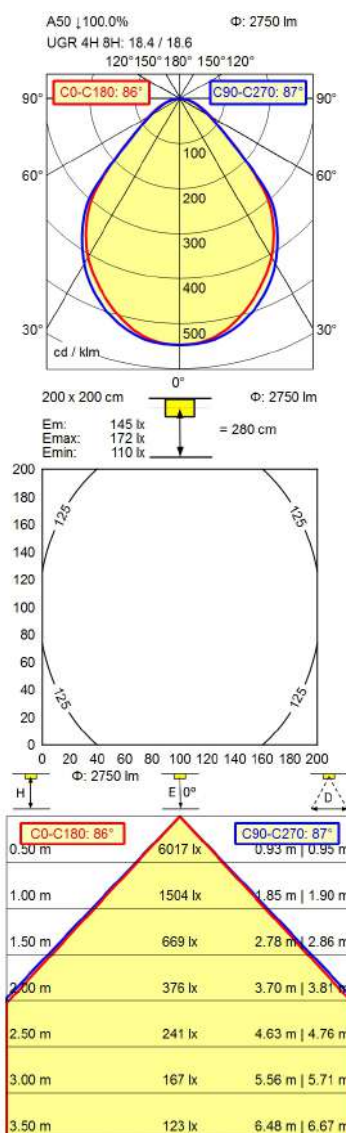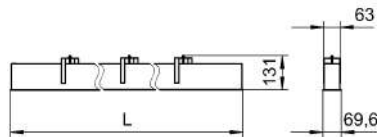

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 26 W

ca. 0,2 W

env. 0,97

approx. 2.750 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct; approx. 100 %

86°

< 3 SDCM

Prism aperture

$\leq$ 3.000 cd/m²

$\leq$ 19

IP 40; 22; I

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

Integrated version

Fastening bow

L90B50 50.000h

4013330079741

ca. 7,3 kg; 7,8 kg

L=2256mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.
²⁾ Higher degree of protection when installed.

Wall-mounted luminaire IDOO.line

ILW 2000/830/D

114414000-00808326

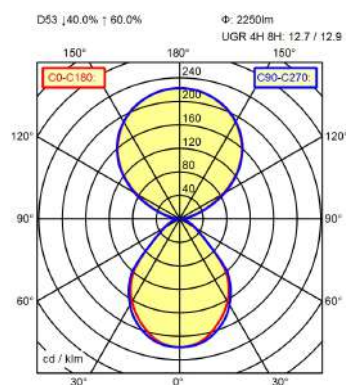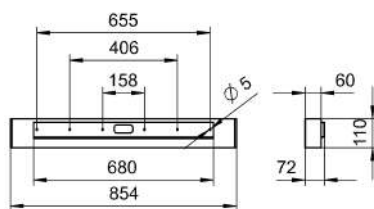

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,25 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081256

ca. 3,9 kg

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 2000/840/D

114412000-00808322

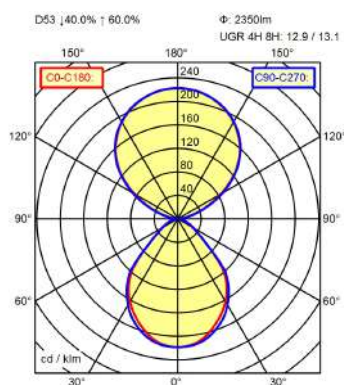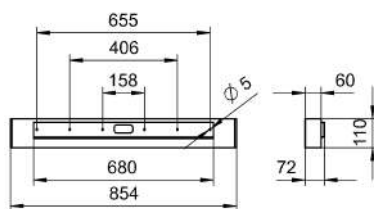

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,25 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330080501

ca. 3,9 kg

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 3000/830/D

114418000-00808328

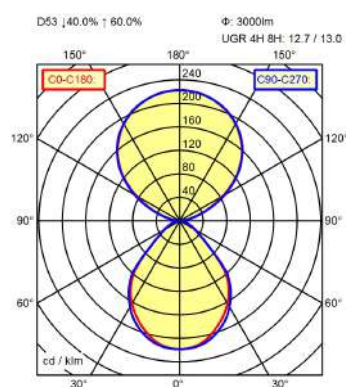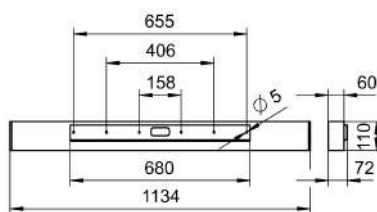

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081539

ca. 4,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 3000/840/D

114416000-00808324

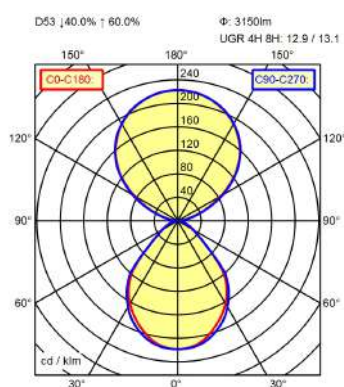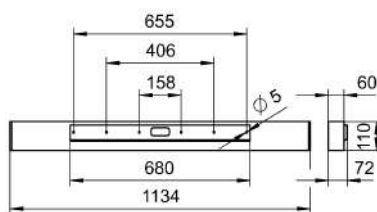

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330080785

ca. 4,7 kg



ca. 1.310 mm; 190 mm; 120 mm

Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line ILW 2000/830/D

114415000-00808327

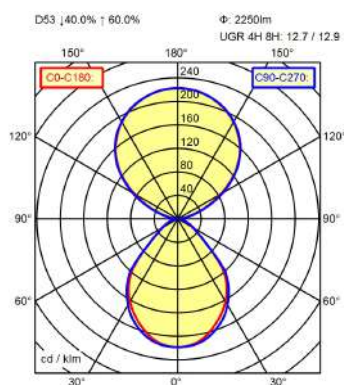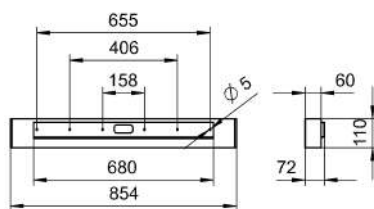

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,25 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081522

ca. 3,9 kg

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 2000/840/D

114413000-00808323

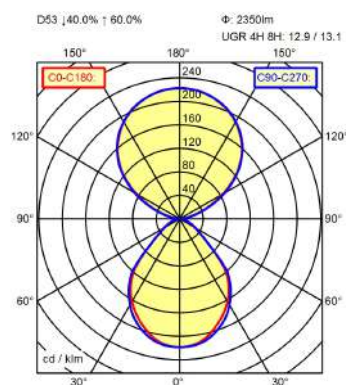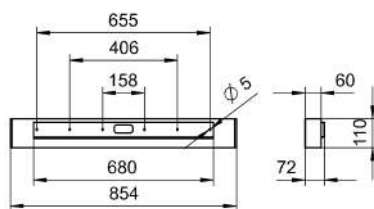

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,25 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330080587

ca. 3,9 kg

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 3000/830/D

114419000-00808329

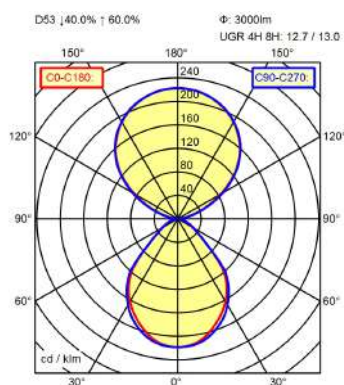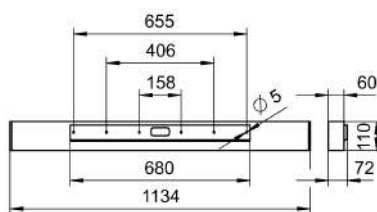

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081560

ca. 4,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Wall-mounted luminaire IDOO.line

ILW 3000/840/D

114417000-00808325

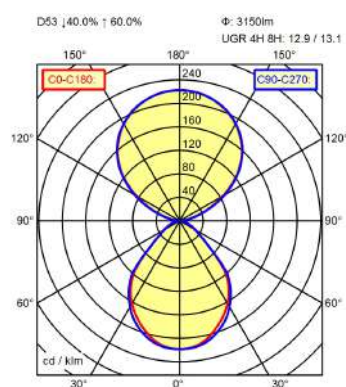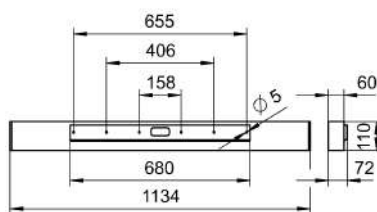

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

Connector

mounted version

Mounting rail

L90B50 50.000h

4013330081232

ca. 4,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114163000-00805710

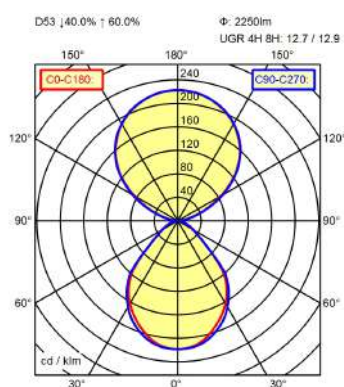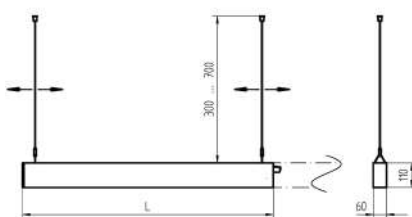

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024475

ca. 3,3 kg; 4,2 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; Direct and indirect light switchable together; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114167000-00805717

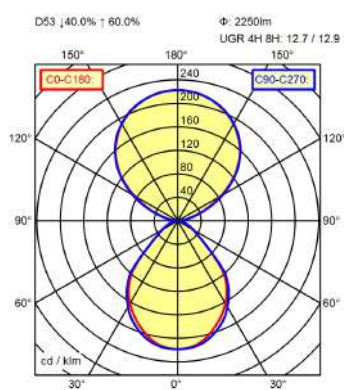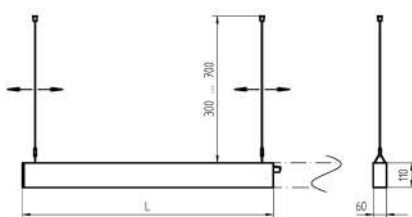

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330025465

ca. 3,3 kg; 4,2 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/840/D

114138000-00805680

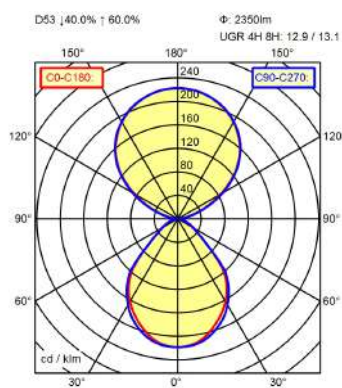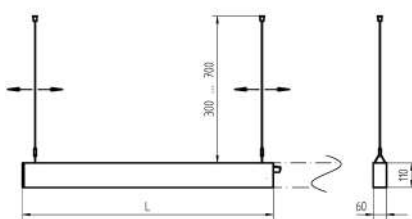

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021191

ca. 3,3 kg; 4,2 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/840/D

114141000-00805683

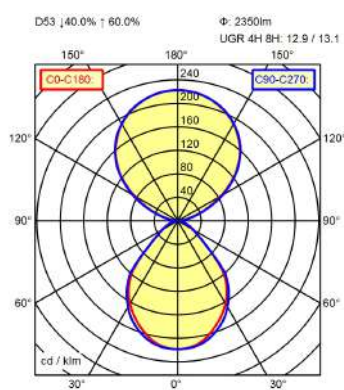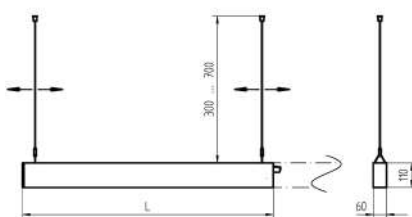

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021726

ca. 3,3 kg; 4,2 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114171000-00805722

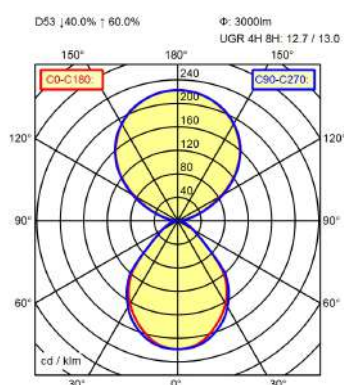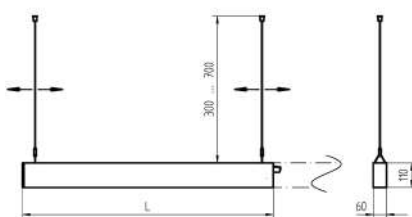

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330027131

ca. 4,1 kg; 5,3 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114175000-00805726

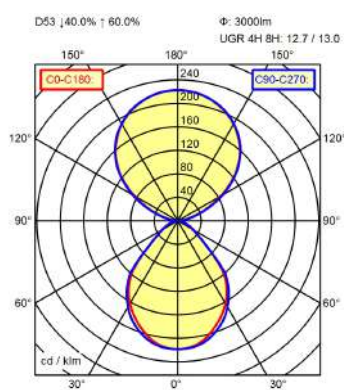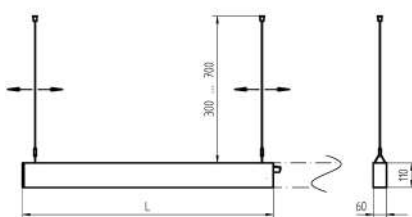

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330028022

ca. 4,1 kg; 5,3 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114144000-00805688

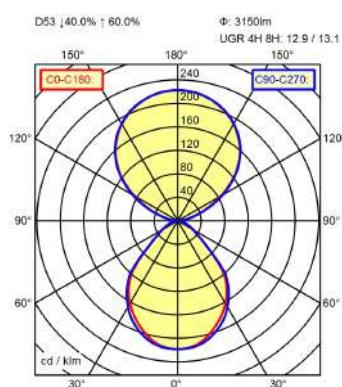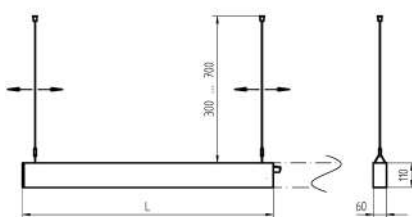

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022075

ca. 4,1 kg; 5,3 kg

L=1128mm



ca. 1.310 mm; 190 mm; 120 mm

Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line ILP 3000/840/D

114147000-00805691

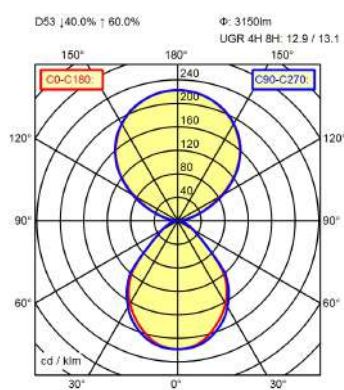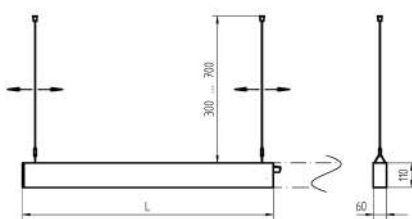

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022228

ca. 4,1 kg; 5,3 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114179000-00805736

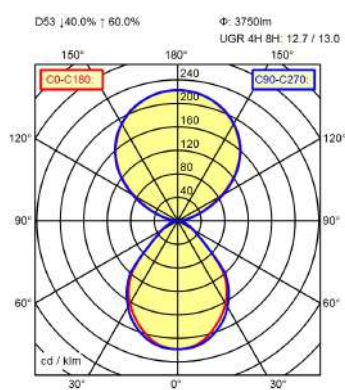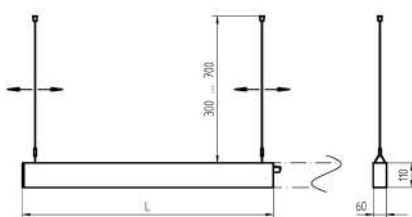

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,98

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330028893

ca. 4,9 kg; 6,4 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114183000-00805740

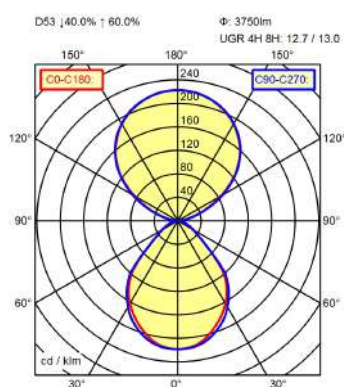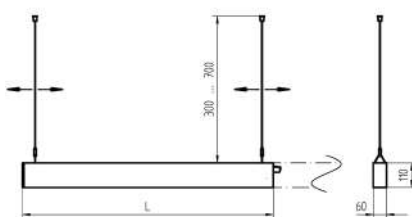

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,98

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330029906

ca. 4,9 kg; 6,4 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/840/D

114150000-00805696

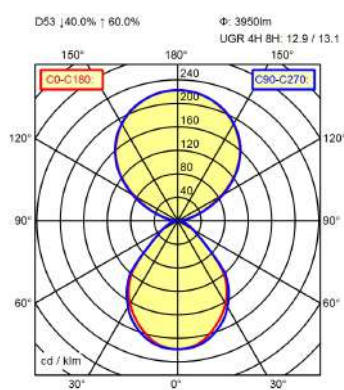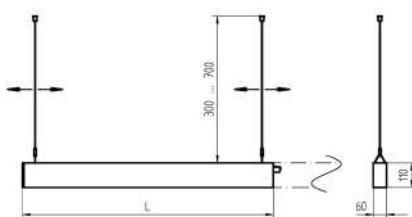

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,98

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022310

ca. 4,9 kg; 6,4 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/840/D

114153000-00805699

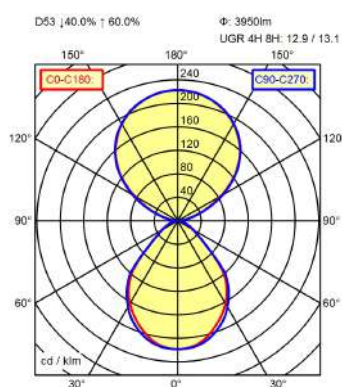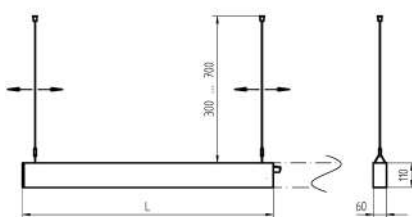

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,98

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022945

ca. 4,9 kg; 6,4 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/830/D

114186000-00805743

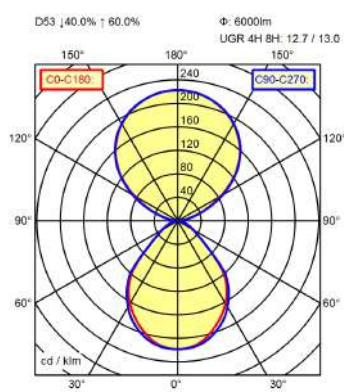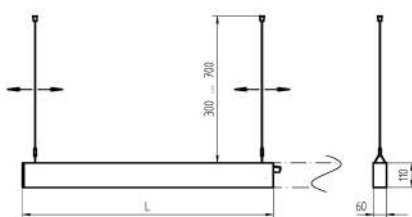

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030292

ca. 7,5 kg; 9,8 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/830/D

114191000-00805748

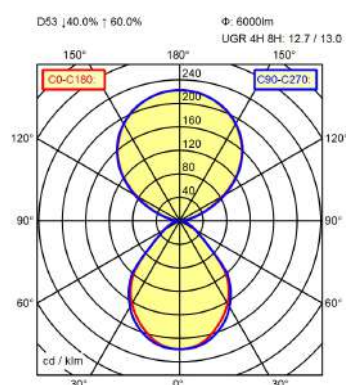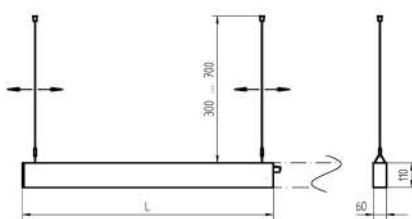

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030636

ca. 7,5 kg; 9,8 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/840/D

114156000-00805702

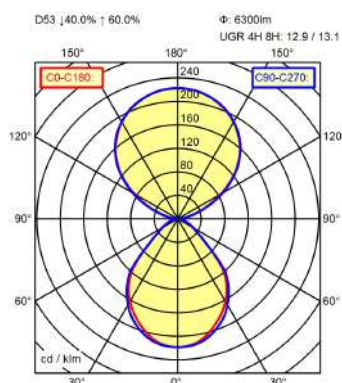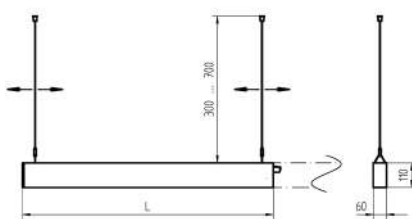

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024017

ca. 7,5 kg; 9,8 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/840/D

114159000-00805705

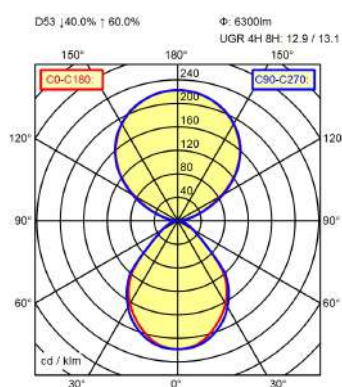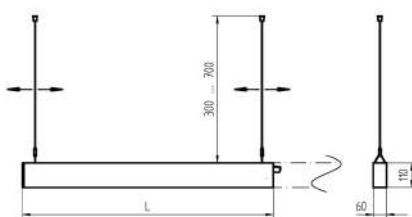

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024376

ca. 7,5 kg; 9,8 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114279000-00806444

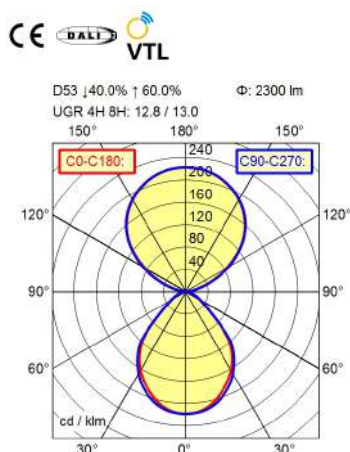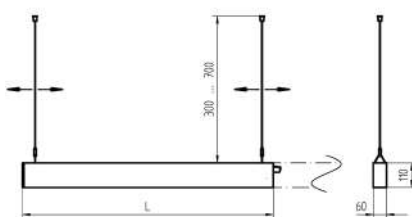

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330037154

ca. 3,4 kg; 4,4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114295000-00806461

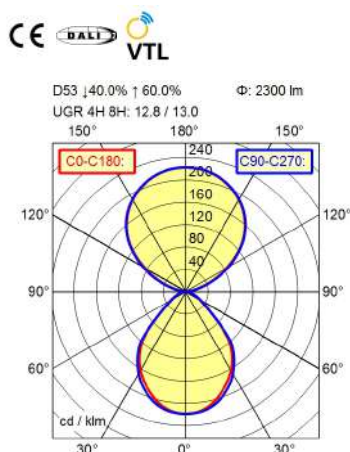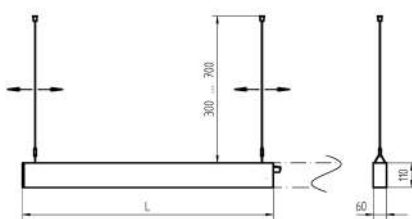

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039080

ca. 3,4 kg; 4,4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114283000-00806449

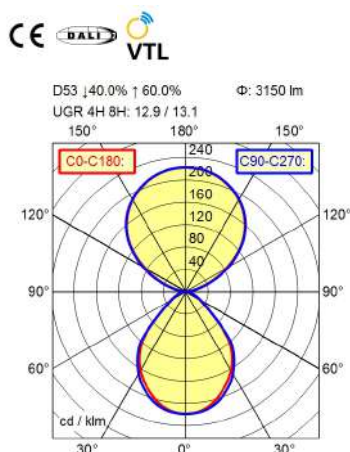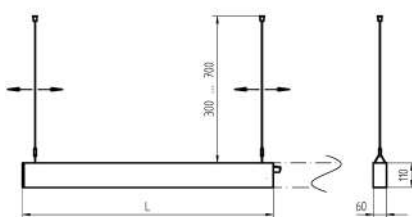

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038458

ca. 4,2 kg; 5,4 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114299000-00806465

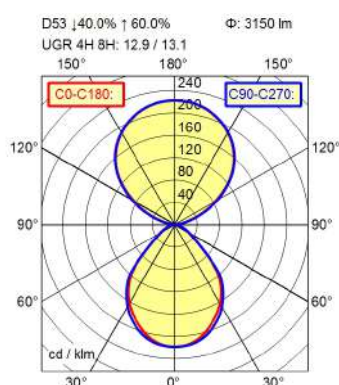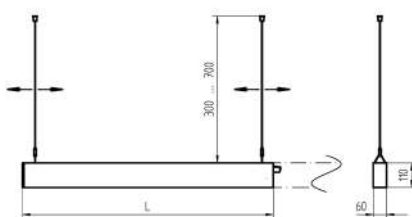

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039592

ca. 4,2 kg; 5,4 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114287000-00806453

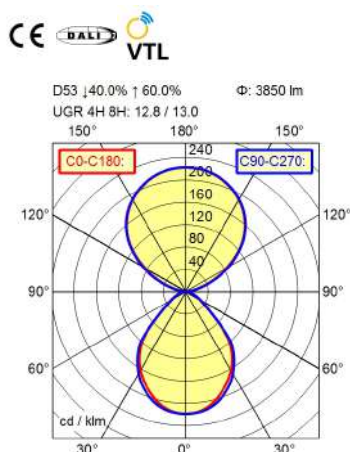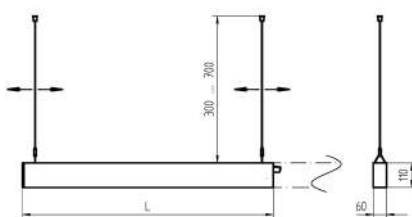

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038762

ca. 5,1 kg; 6,6 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114303000-00806469

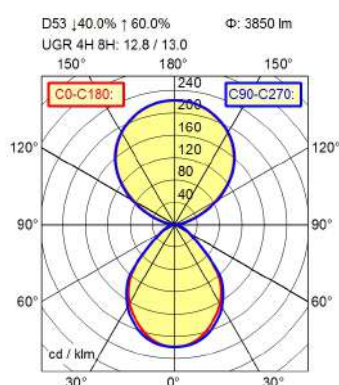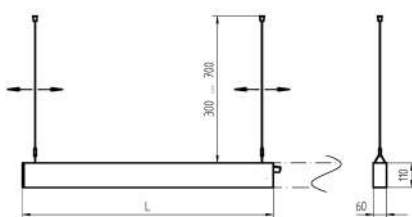

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330040048

ca. 5,1 kg; 6,6 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114291000-00806457

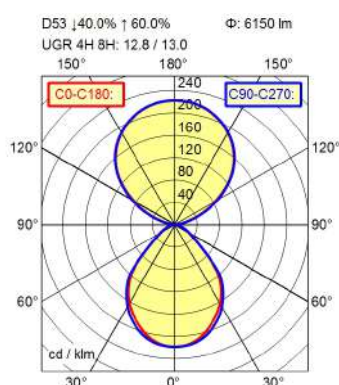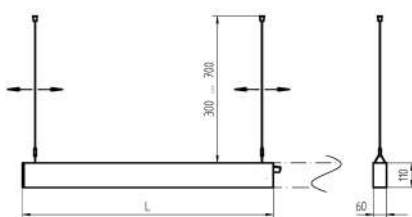

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038816

ca. 8 kg; 10,3 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114307000-00806473

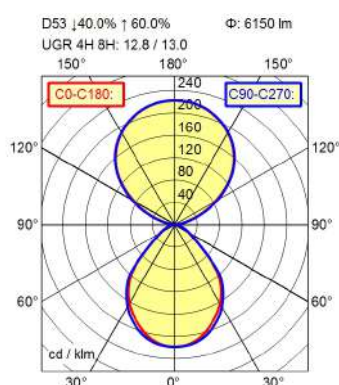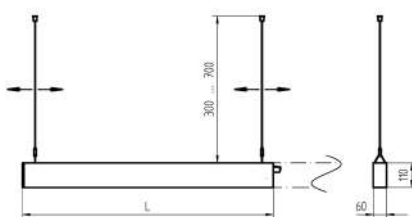

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Start luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330040659

ca. 8 kg; 10,3 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114164000-00805711

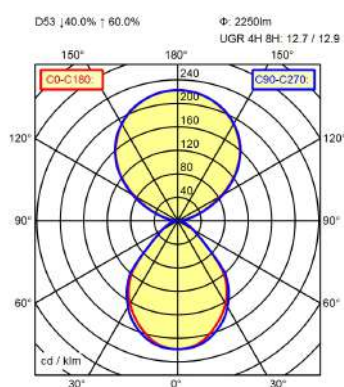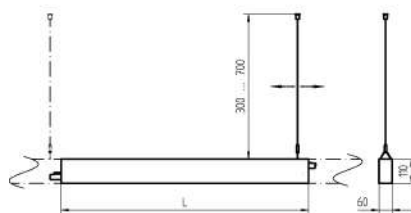

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024529

ca. 3,1 kg; 4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114168000-00805718

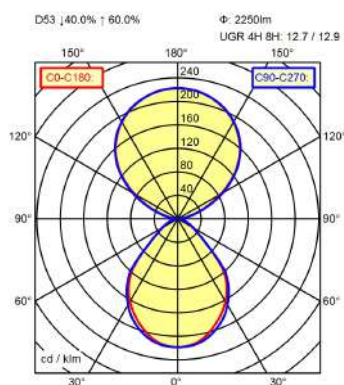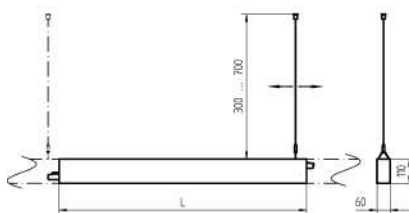

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330025953

ca. 3,1 kg; 4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/840/D

114139000-00805681

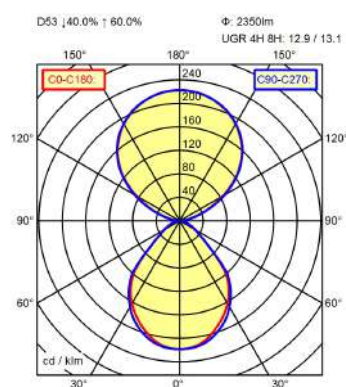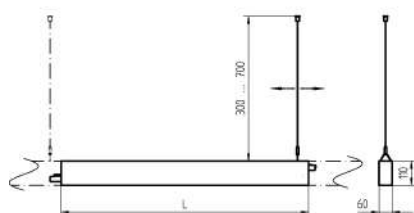

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021399

ca. 3,1 kg; 4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/840/D

114142000-00805684

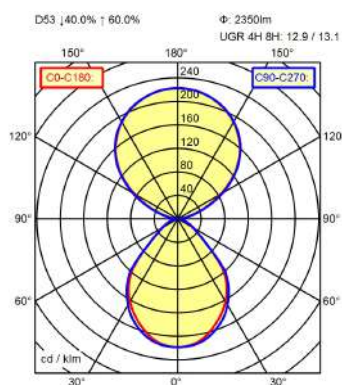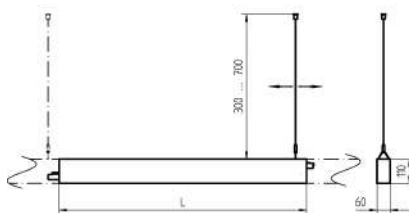

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021993

ca. 3,1 kg; 4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/830/D

114172000-00805723

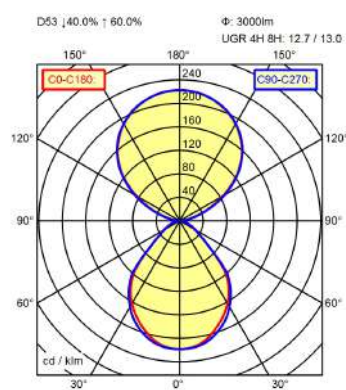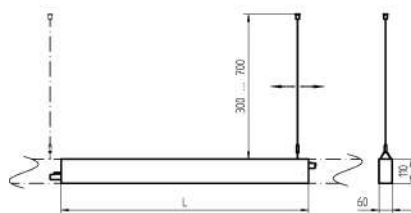

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330027315

ca. 4 kg; 5,2 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114176000-00805727

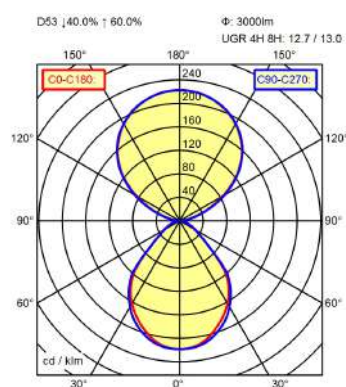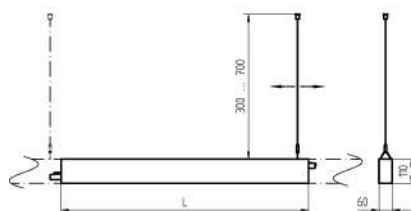

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330028060

ca. 4 kg; 5,2 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114145000-00805689

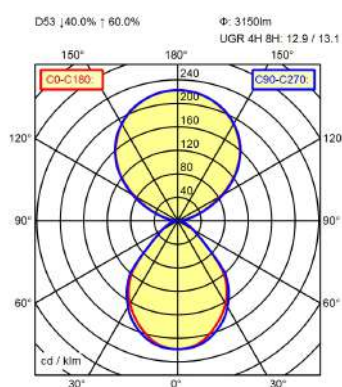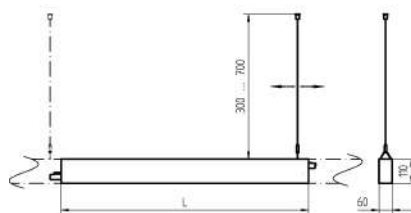

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022129

ca. 4 kg; 5,2 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114148000-00805692

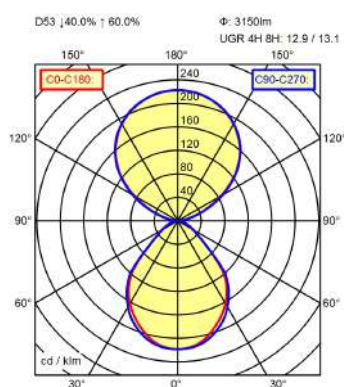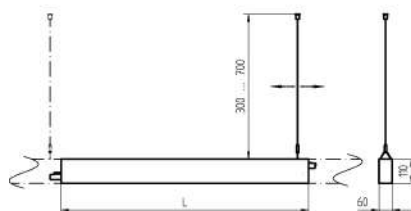

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022235

ca. 4 kg; 5,2 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114180000-00805737

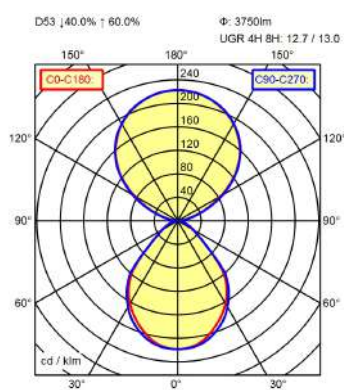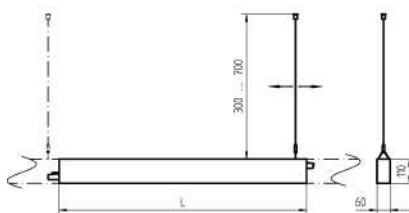

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330029180

ca. 4,8 kg; 6,3 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114184000-00805741

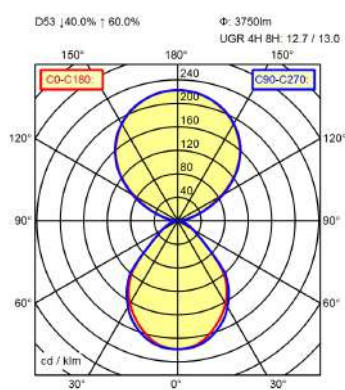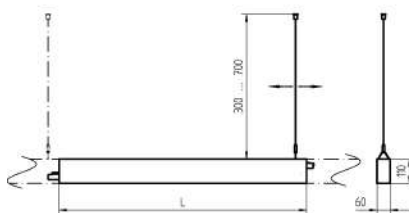

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030223

ca. 4,8 kg; 6,3 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/840/D

114151000-00805697

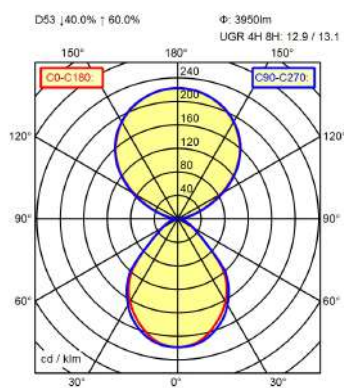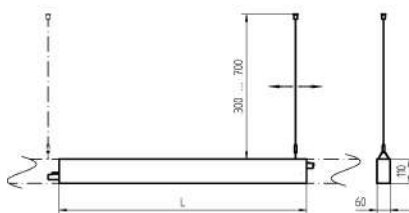

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022549

ca. 4,8 kg; 6,3 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/840/D

114154000-00805700

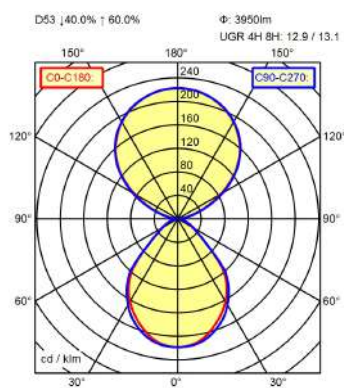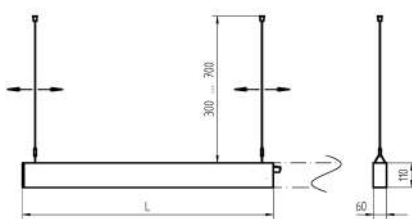

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022969

ca. 4,8 kg; 6,3 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/830/D

114188000-00805745

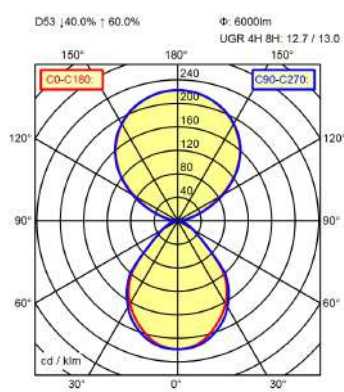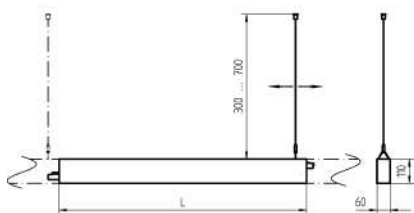

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030339

ca. 7,5 kg; 9,8 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/830/D

114192000-00805749

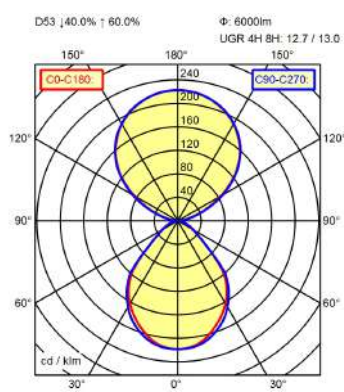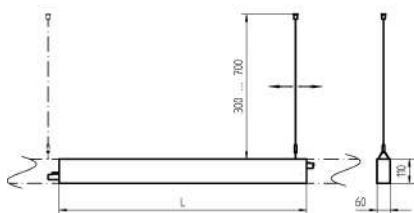

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030803

ca. 7,5 kg; 9,8 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/840/D

114157000-00805703

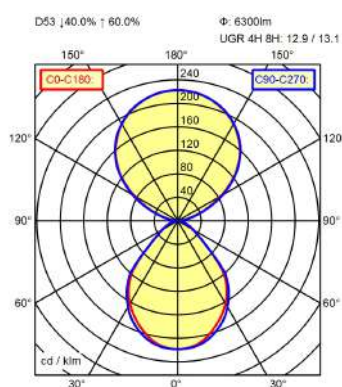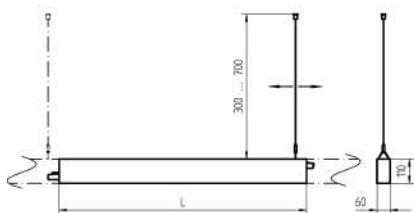

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024192

ca. 7,5 kg; 9,8 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/840/D

114160000-00805706

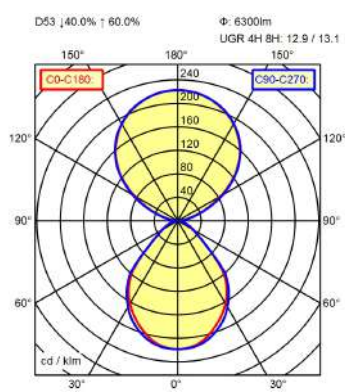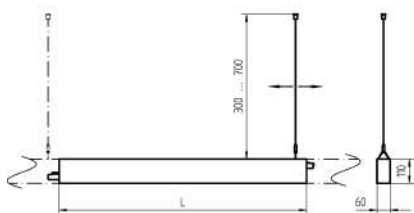

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024383

ca. 7,5 kg; 9,8 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114280000-00806445

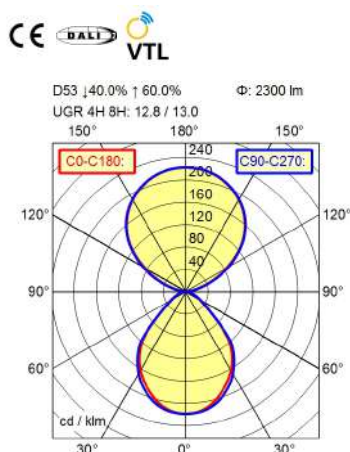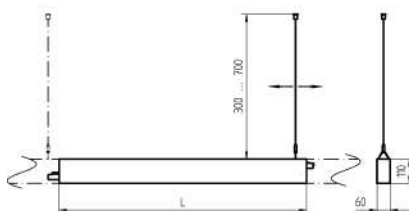

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330037451

ca. 3,4 kg; 4,4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114296000-00806462

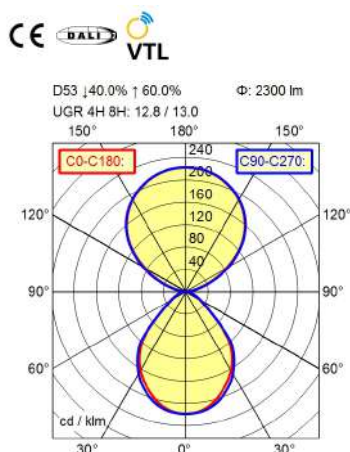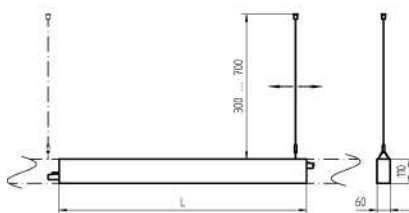

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039349

ca. 3,4 kg; 4,4 kg

L=842mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114284000-00806450

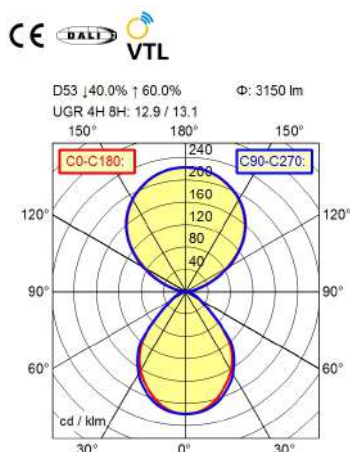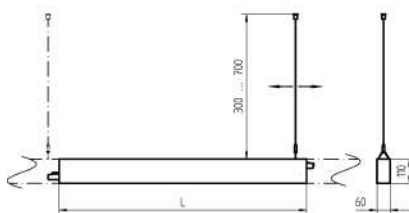

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038731

ca. 4,2 kg; 5,4 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114300000-00806466

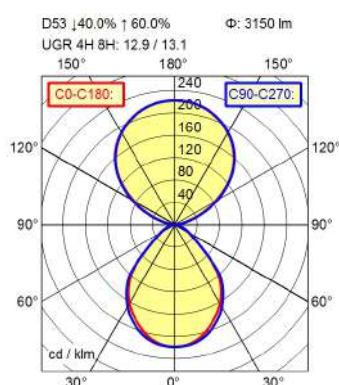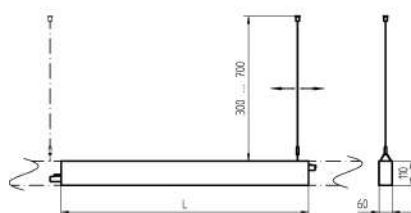

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039653

ca. 4,2 kg; 5,4 kg

L=1122mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114288000-00806454

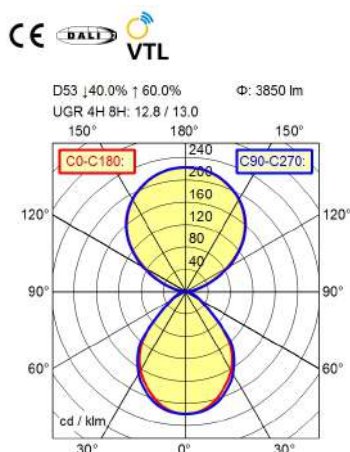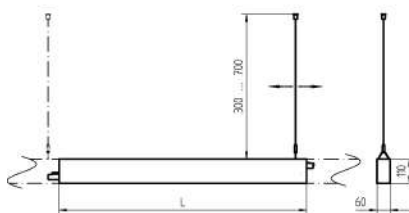

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038779

ca. 5,1 kg; 6,6 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114304000-00806470

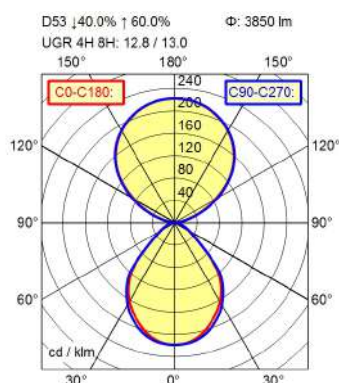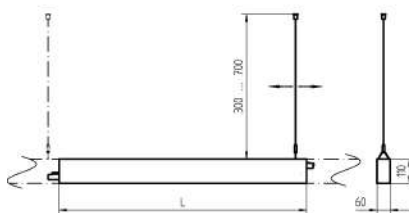

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330040161

ca. 5,1 kg; 6,6 kg

L=1402mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114292000-00806458

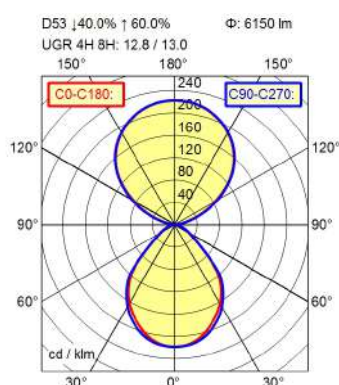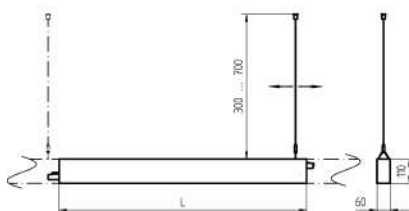

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038861

ca. 8,1 kg; 10,4 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114308000-00806474

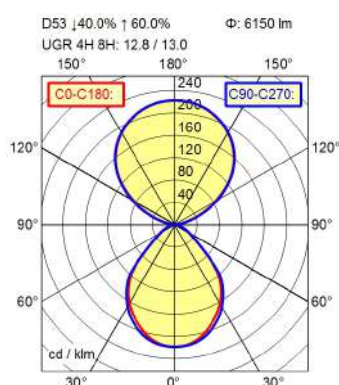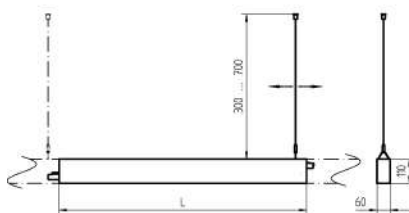

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; Middle luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330041106

ca. 8,1 kg; 10,4 kg

L=2244mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114336000-00807702

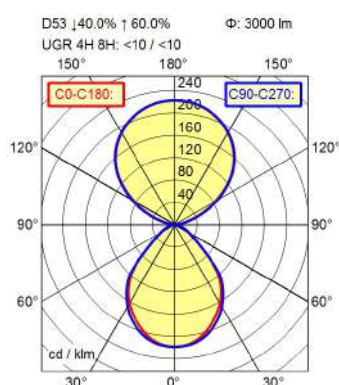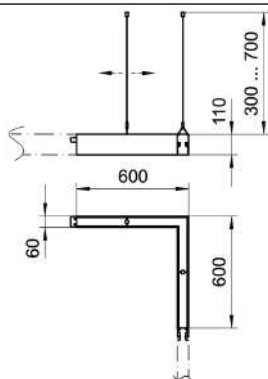

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052201

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114337000-00807703

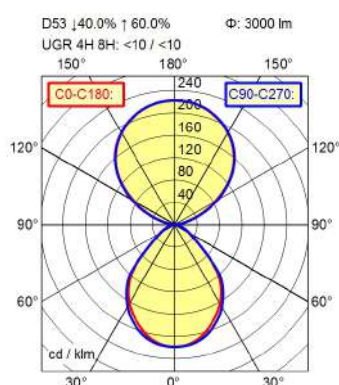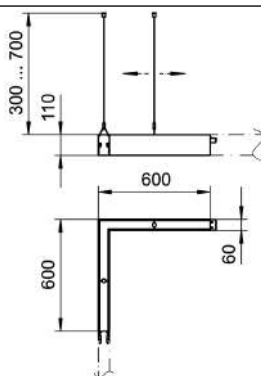

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052218

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/830/D

114340000-00807706

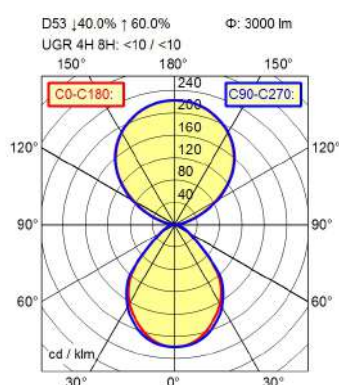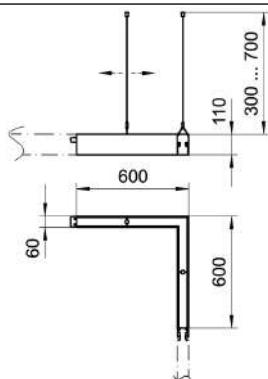

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052249

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/830/D

114341000-00807707

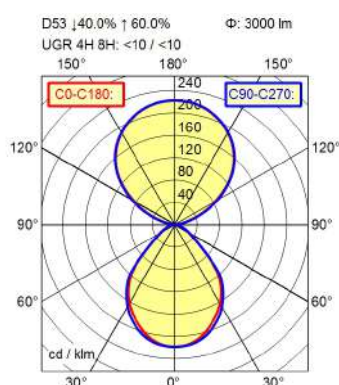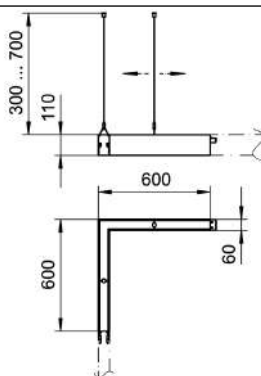

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052256

ca. 4,5 kg; 5,7 kg

L=600mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/840/D

114334000-00807700

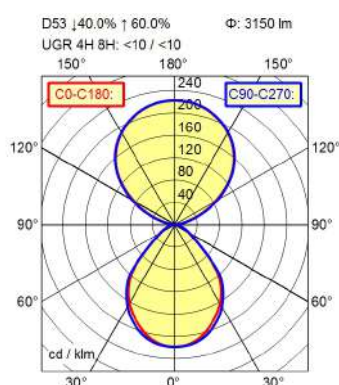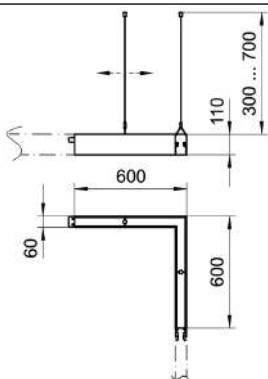

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330051846

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114335000-00807701

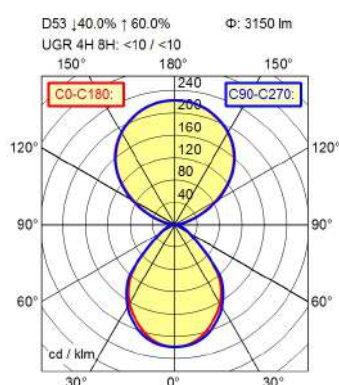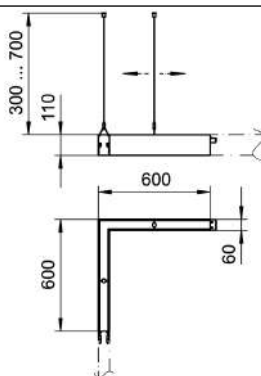

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052188

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/840/D

114338000-00807704

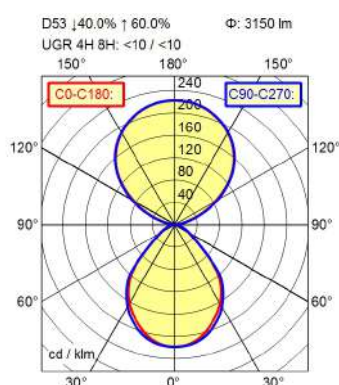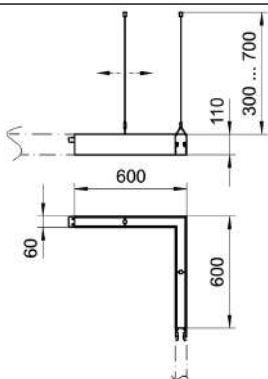

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052225

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/840/D

114339000-00807705

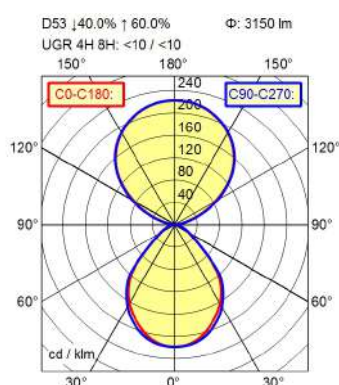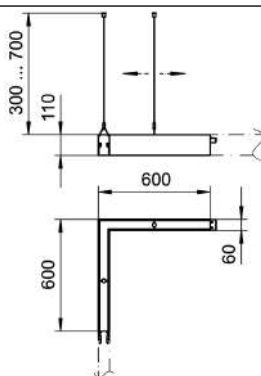

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,970

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052232

ca. 4,5 kg; 5,7 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114342000-00807708

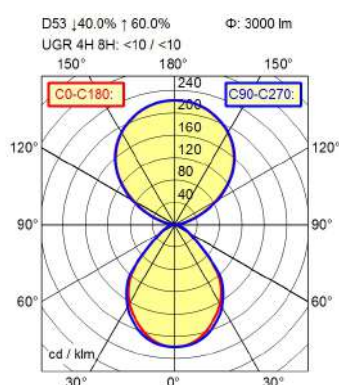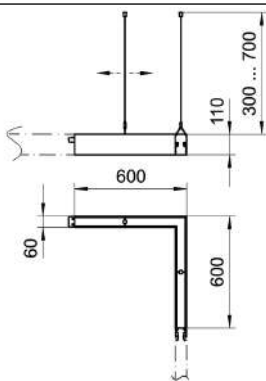

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052270

ca. 4,6 kg; 5,8 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114343000-00807709

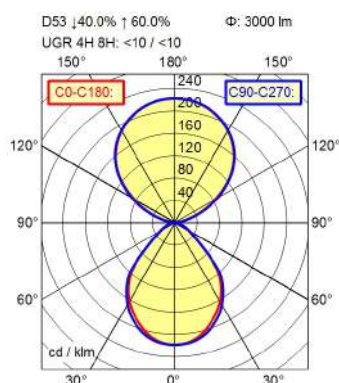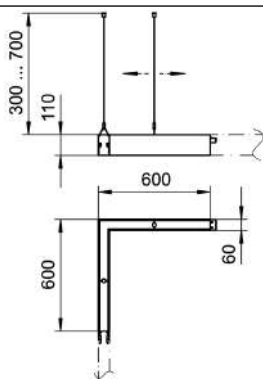

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052287

ca. 4,6 kg; 5,8 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114344000-00807710

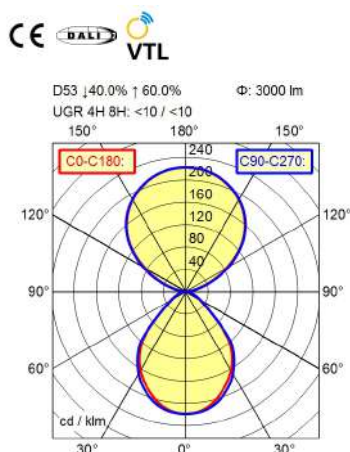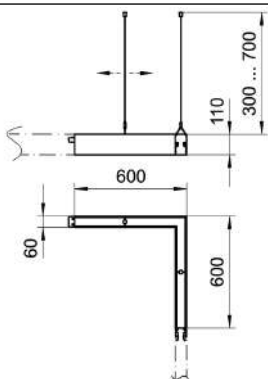

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052294

ca. 4,6 kg; 5,8 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the left side; Continuous light without dark z; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114345000-00807711

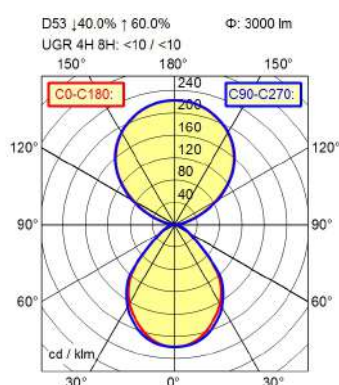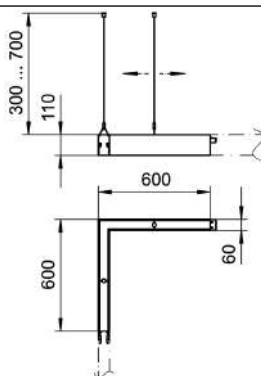

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Fastening

Configuration

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

Steel cable 0.3 - 0.7 m

Middle luminaire

L90B50 50.000h

C

4013330052317

ca. 4,6 kg; 5,8 kg

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; 90° rerouting on the right side; Continuous light without dark zone; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/830/D

114165000-00805712

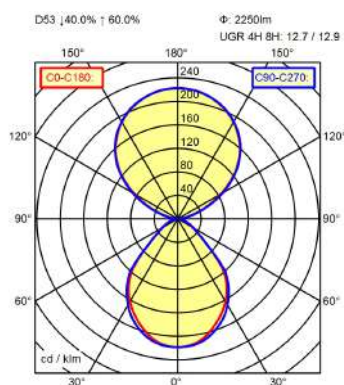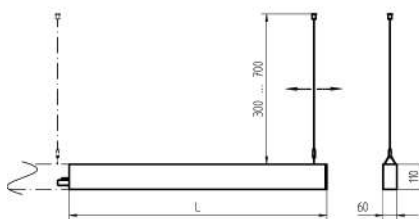

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024581

ca. 3,1 kg; 4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/830/D

114169000-00805719

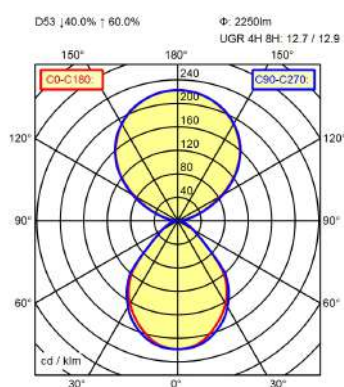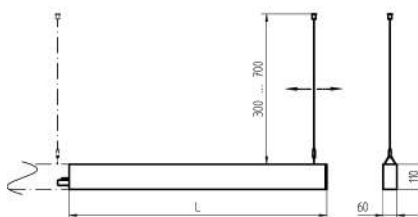

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.250 lm

approx. 132 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330026707

ca. 3,1 kg; 4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Suspended luminaire IDOO.line

ILP 2000/840/D

114140000-00805682

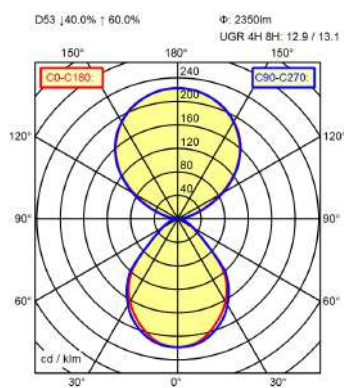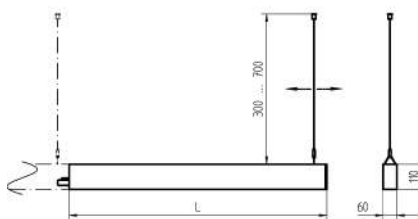

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021429

ca. 3,1 kg; 4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/840/D

114143000-00805685

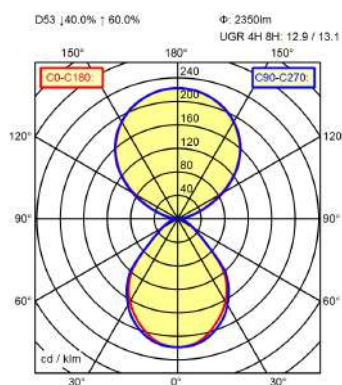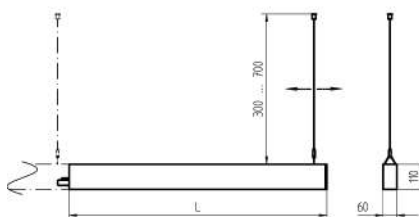

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 17 W

ca. 0,2 W

env. 0,97

approx. 2.350 lm

approx. 138 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022006

ca. 3,1 kg; 4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114173000-00805724

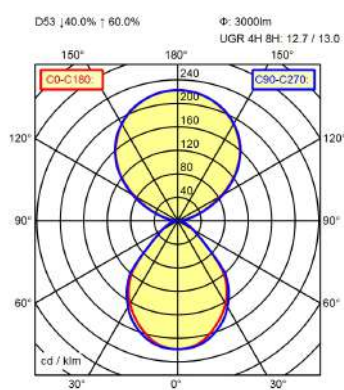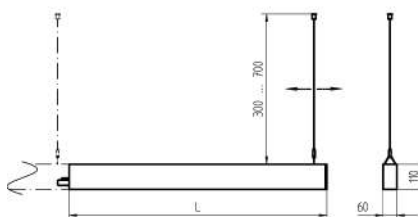

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330027407

ca. 3,9 kg; 5,1 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/830/D

114177000-00805728

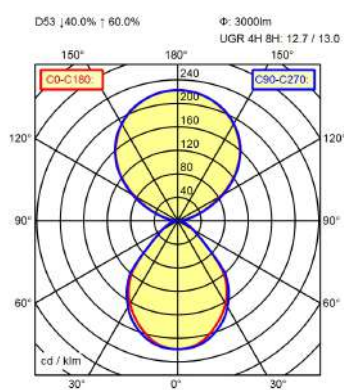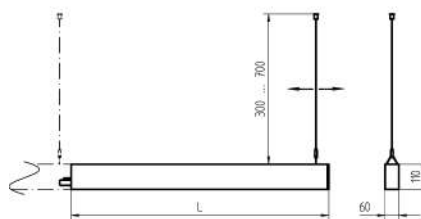

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330028268

ca. 3,9 kg; 5,1 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114146000-00805690

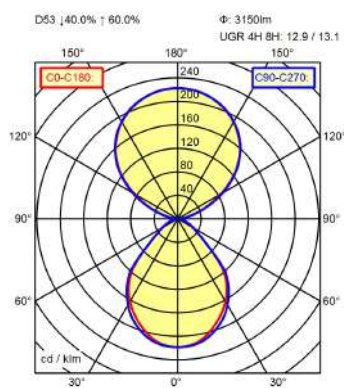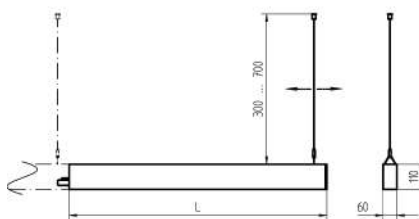

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022211

ca. 3,9 kg; 5,1 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/840/D

114149000-00805693

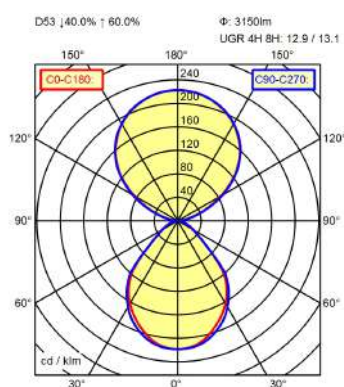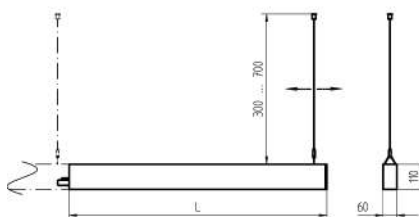

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,2 W

env. 0,97

approx. 3.150 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022242

ca. 3,9 kg; 5,1 kg

L=1128mm

ca. 1.310 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114181000-00805738

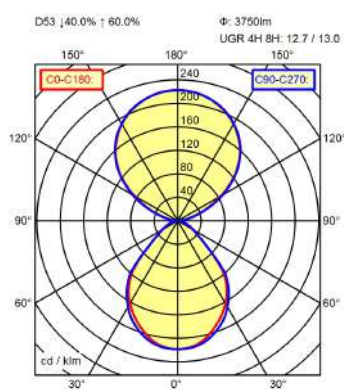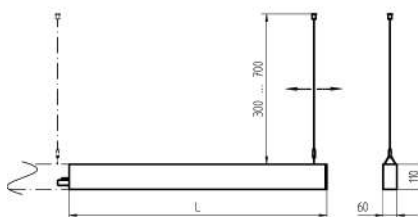

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330029630

ca. 4,7 kg; 6,2 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/830/D

114185000-00805742

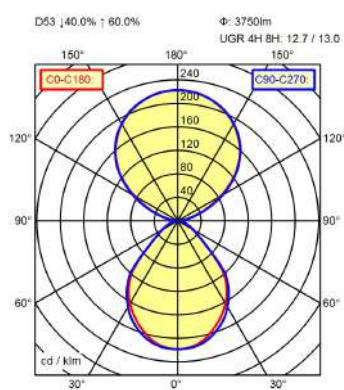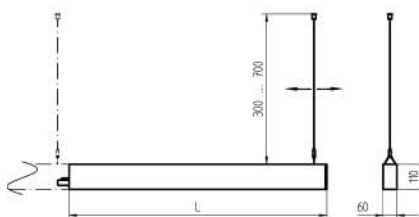

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.750 lm

approx. 129 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030278

ca. 4,7 kg; 6,2 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/840/D

114152000-00805698

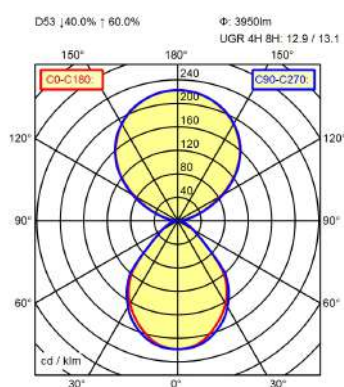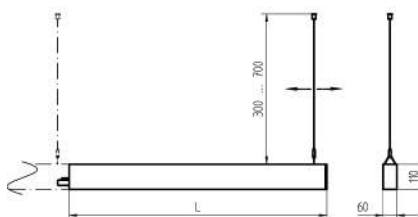

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 29 W

ca. 0,15 W

env. 0,980

approx. 3.950 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330022624

ca. 4,7 kg; 6,2 kg



L=1408mm

ca. 1.600 mm; 190 mm; 120 mm

Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

114155000-00805701

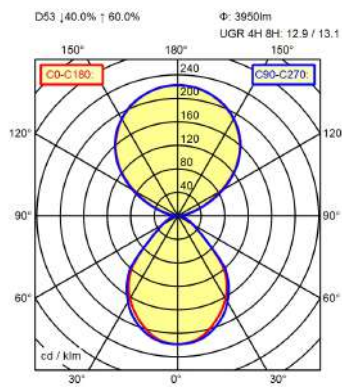
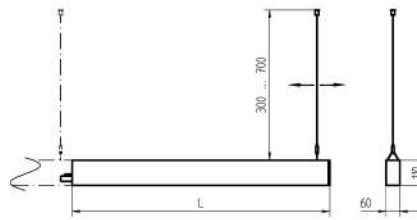


¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.

Suspended luminaire IDOO.line

ILP 6000/830/D

114189000-00805746

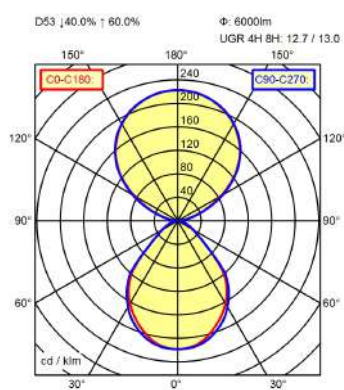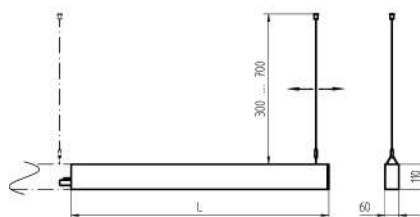

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030544

ca. 7,4 kg; 9,7 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/830/D

114193000-00805750

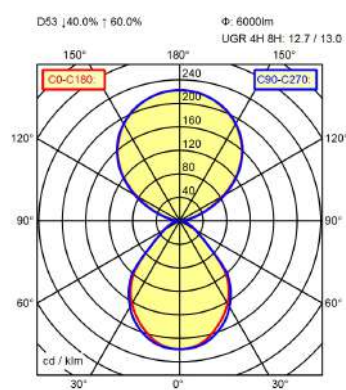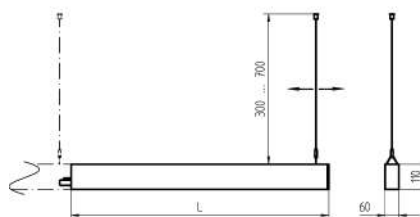

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.000 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330030827

ca. 7,4 kg; 9,7 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/840/D

114158000-00805704

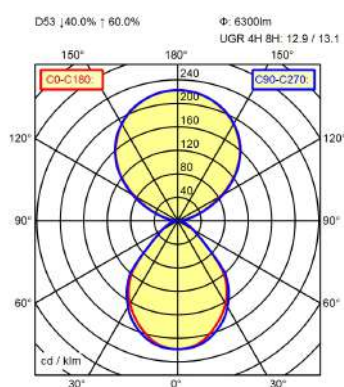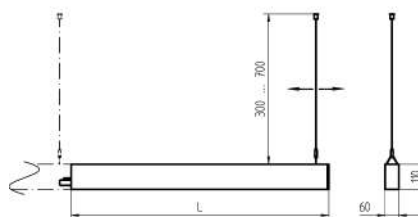

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024314

ca. 7,4 kg; 9,7 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/840/D

114161000-00805707

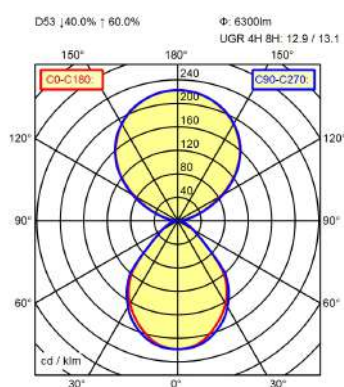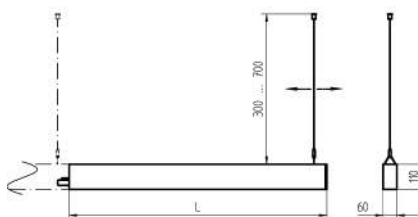

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330024390

ca. 7,4 kg; 9,7 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114281000-00806446

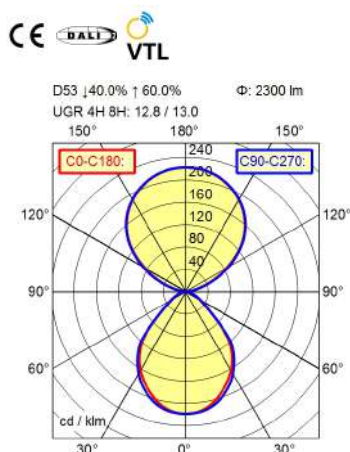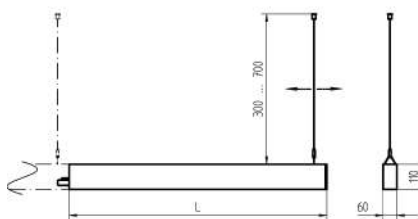

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330037604

ca. 3,4 kg; 4,4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 2000/VTL/D

114297000-00806463

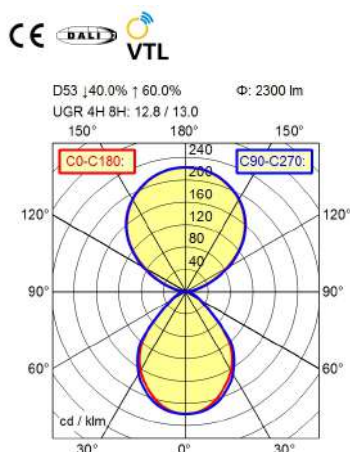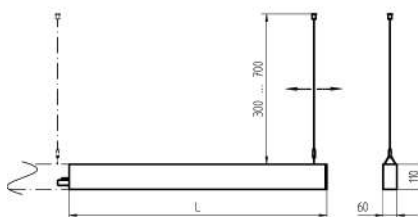

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039400

ca. 3,4 kg; 4,4 kg

L=848mm

ca. 1.000 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 3000/VTL/D

114285000-00806451

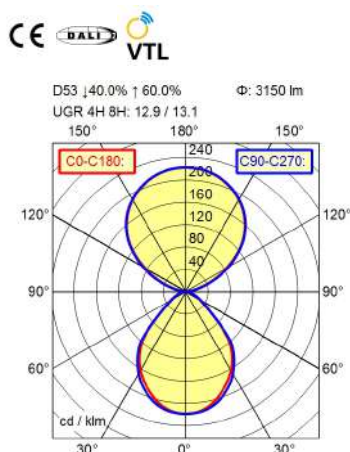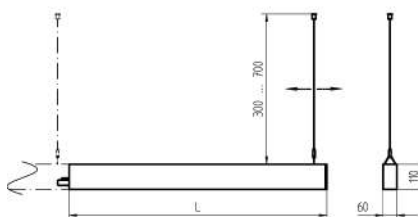

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 32 W

ca. 0,25 W

env. 0,970

approx. 3.150 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038748

ca. 4,2 kg; 5,4 kg



L=1128mm

ca. 1.310 mm; 190 mm; 120 mm

Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

114301000-00806467

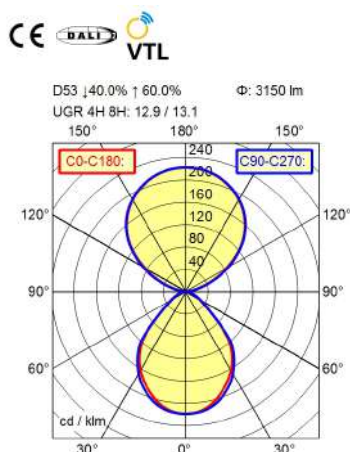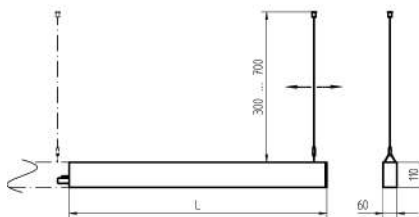



Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 32 W
Standby	ca. 0,25 W
Power factor	env. 0,970
Luminous flux	approx. 3.150 lm
Luminous efficiency ¹⁾	approx. 98 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 90
Light distribution	Direct/indirect; approx. 40 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 2.700 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 40
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Dimming Range	3-100%
Mains lead	With free stranded wires; End luminaire
Fastening	Steel cable 0.3 - 0.7 m
Life expectancy LED	L90B50 50.000h
Energy efficiency class	C
EAN	4013330039752
Weight without/incl. packaging	ca. 4,2 kg; 5,4 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114289000-00806455

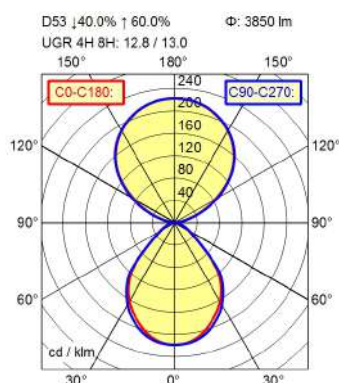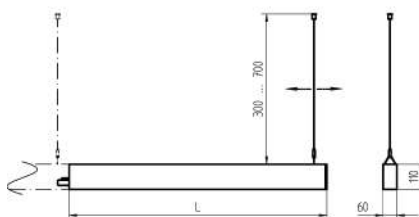

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 39 W

ca. 0,25 W

env. 0,970

approx. 3.850 lm

approx. 98 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038786

ca. 5,1 kg; 6,6 kg

L=1408mm

ca. 1.600 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 4000/VTL/D

114305000-00806471

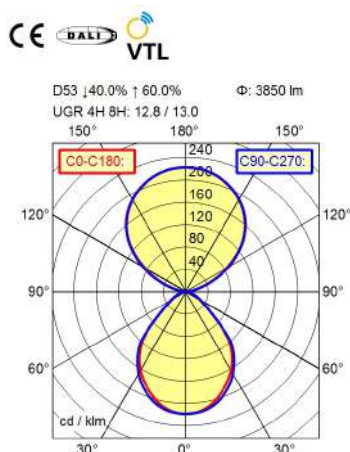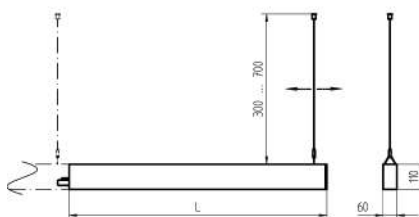

Light source

LED

Work equipment

Electronic ballast

Connected load

220 - 240 V; 50 Hz; 60 Hz

Power consumption

ca. 39 W

Standby

ca. 0,25 W

Power factor

env. 0,970

Luminous flux

approx. 3.850 lm

Luminous efficiency ¹⁾

approx. 98 lm/W

Light type/-color

Cold white

Colour temperatur

approx. 2.700 - 6.500 K

Color rendering index

CRI ≥ 90

Light distribution

Direct/indirect; approx. 40 %

Chromaticity tolerance LED

< 3 SDCM

Glare control

Prism aperture

Luminance (L65)

≤ 2.700 cd/m²

UGR class (4H 8H; EN 12464-1)

≤ 16

System of protection/Class

IP 40

Technology

Continuously dimmable

Operation

External

Housing

Sectional aluminium; Silver

Light source cover

Acrylic (PMMA); Clear

Dimming Range

3-100%

Mains lead

With free stranded wires; End luminaire

Fastening

Steel cable 0.3 - 0.7 m

Life expectancy LED

L90B50 50.000h

Energy efficiency class

C

EAN

4013330040574

Weight without/incl. packaging

ca. 5,1 kg; 6,6 kg

Dimensions (dimensional drawing)

L=1408mm

Packaging dimensions

ca. 1.600 mm; 190 mm; 120 mm

Special features



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114293000-00806459

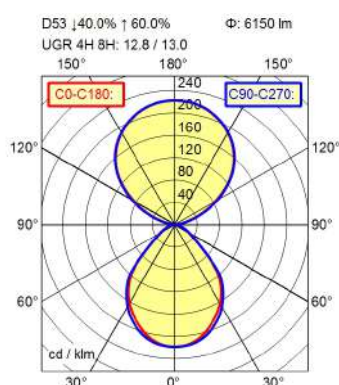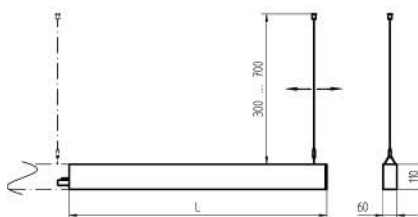

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI $\geq$ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

$\leq$ 2.700 cd/m²

$\leq$ 16

IP 40

Continuously dimmable

External

Sectional aluminium; White

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330038878

ca. 8 kg; 10,3 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm



Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Suspended luminaire IDOO.line

ILP 6000/VTL/D

114309000-00806475

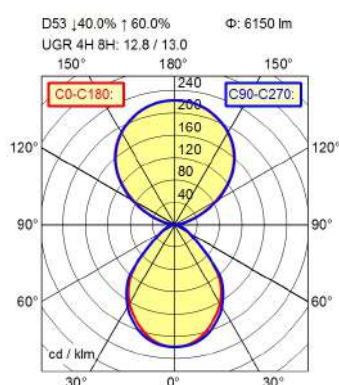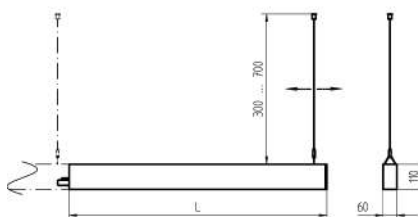

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 63 W

ca. 0,25 W

env. 0,980

approx. 6.150 lm

approx. 97 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

With free stranded wires; End luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330041137

ca. 8 kg; 10,3 kg

L=2250mm

ca. 2.410 mm; 190 mm; 120 mm


Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114360000-00807937

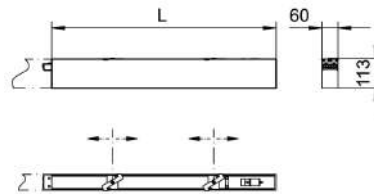


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073992
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114384000-00807961

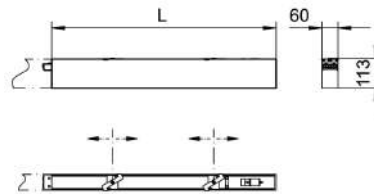


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073831
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Maintenance-friendly due to easily accessible ballasts; Through-wired, up to 18 m on one mains connection; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114348000-00807925

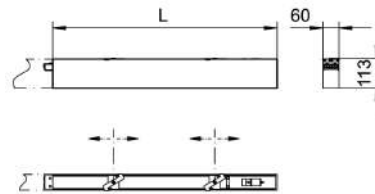


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074654
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114372000-00807949

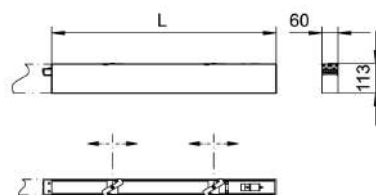


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074104
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114363000-00807940

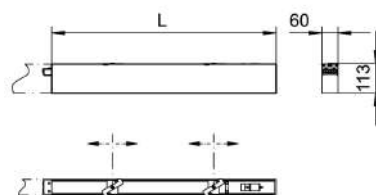


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074838
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114387000-00807964

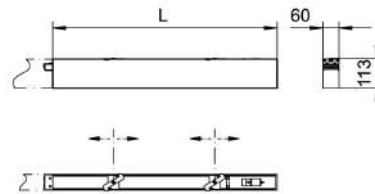


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074777
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114351000-00807928

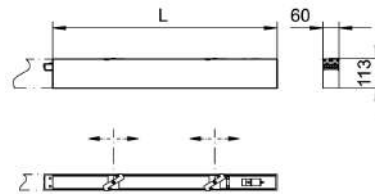


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076139
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114375000-00807952

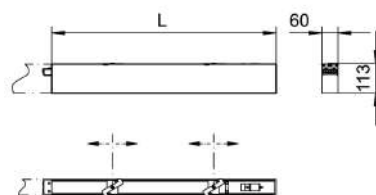


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330075064
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114366000-00807943

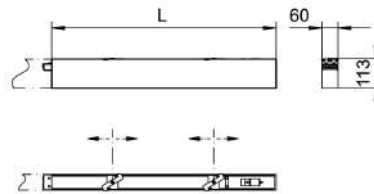


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077129
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114390000-00807967

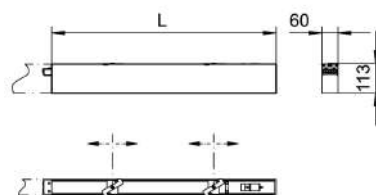


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076511
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114354000-00807931

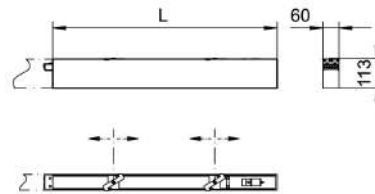


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077426
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114378000-00807955

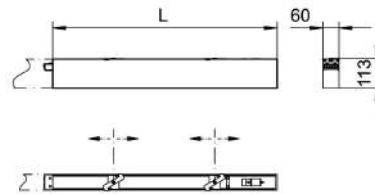

Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077235
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Maintenance-friendly due to easily accessible ballasts; Through-wired, up to 18 m on one mains connection; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line DLA 3000/830/D

114369000-00807946



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077808
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Maintenance-friendly due to easily accessible ballasts; Through-wired, up to 18 m on one mains connection; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line DLA 3000/830/D

114393000-00807970



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077587
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/840/D

114357000-00807934



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330078690
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line DLA 3000/840/D

114381000-00807958



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Start luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330078058
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; Start luminaire with mains connection; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114361000-00807938



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073879
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=842mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114385000-00807962



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073138
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=842mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114349000-00807926



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074524
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=842mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114373000-00807950



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074098
Weight without/incl. packaging	ca. 3,1 kg; 4,1 kg
Dimensions (dimensional drawing)	L=842mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114364000-00807941



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074807
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1122mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114388000-00807965



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074753
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1122mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114352000-00807929



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330075743
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1122mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114376000-00807953



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074975
Weight without/incl. packaging	ca. 3,9 kg; 5,1 kg
Dimensions (dimensional drawing)	L=1122mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114367000-00807944



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076979
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1402mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114391000-00807968



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076375
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1402mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114355000-00807932



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077341
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1402mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114379000-00807956



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077167
Weight without/incl. packaging	ca. 4,7 kg; 6,2 kg
Dimensions (dimensional drawing)	L=1402mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/830/D

114370000-00807947



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077754
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2244mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line DLA 3000/830/D

114394000-00807971



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077549
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2244mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/840/D

114358000-00807935



Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330078386
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2244mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/840/D

114382000-00807959




Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; Middle luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077846
Weight without/incl. packaging	ca. 7,3 kg; 9,6 kg
Dimensions (dimensional drawing)	L=2244mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114362000-00807939

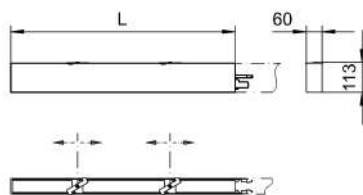


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073848
Weight without/incl. packaging	ca. 3 kg; 4 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/830/D

114386000-00807963

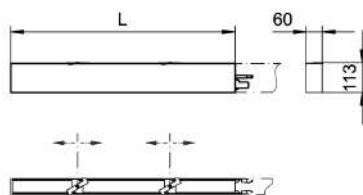


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 10 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330073114
Weight without/incl. packaging	ca. 3 kg; 4 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114350000-00807927

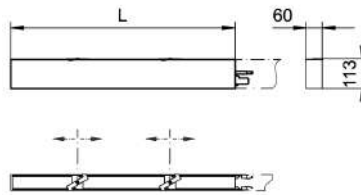


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074456
Weight without/incl. packaging	ca. 3 kg; 4 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1000/840/D

114374000-00807951

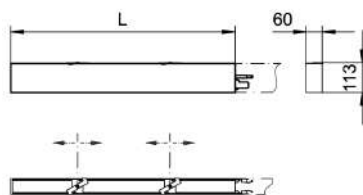


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 9,5 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.000 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074050
Weight without/incl. packaging	ca. 3 kg; 4 kg
Dimensions (dimensional drawing)	L=848mm
Packaging dimensions	ca. 1.000 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114365000-00807942

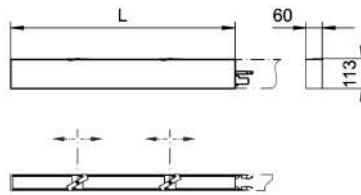


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074791
Weight without/incl. packaging	ca. 3,8 kg; 5 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/830/D

114389000-00807966

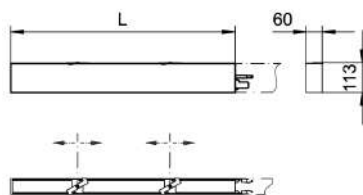


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.300 lm
Luminous efficiency ¹⁾	approx. 100 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074692
Weight without/incl. packaging	ca. 3,8 kg; 5 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114353000-00807930

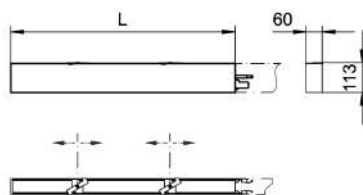


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330075514
Weight without/incl. packaging	ca. 3,8 kg; 5 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 1500/840/D

114377000-00807954

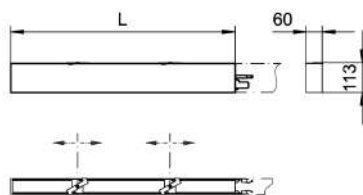


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Standby	ca. 0,2 W
Power factor	env. 0,97
Luminous flux	approx. 1.350 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330074876
Weight without/incl. packaging	ca. 3,8 kg; 5 kg
Dimensions (dimensional drawing)	L=1128mm
Packaging dimensions	ca. 1.310 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114368000-00807945

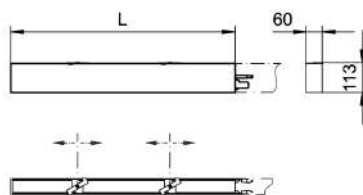


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076870
Weight without/incl. packaging	ca. 4,6 kg; 6,1 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/830/D

114392000-00807969

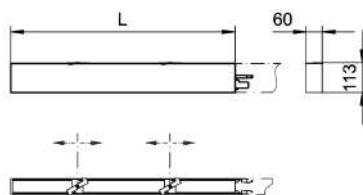


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.650 lm
Luminous efficiency ¹⁾	approx. 103 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330076320
Weight without/incl. packaging	ca. 4,6 kg; 6,1 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114356000-00807933

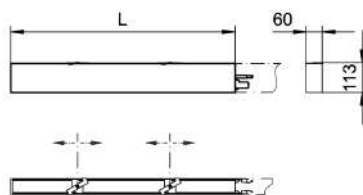


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077327
Weight without/incl. packaging	ca. 4,6 kg; 6,1 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 2000/840/D

114380000-00807957

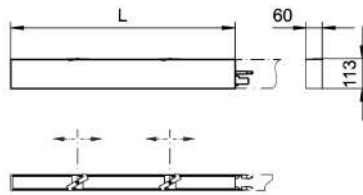


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 16 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 1.700 lm
Luminous efficiency ¹⁾	approx. 106 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077150
Weight without/incl. packaging	ca. 4,6 kg; 6,1 kg
Dimensions (dimensional drawing)	L=1408mm
Packaging dimensions	ca. 1.600 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/830/D

114371000-00807948

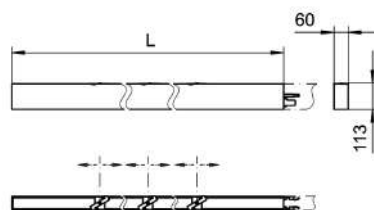


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077709
Weight without/incl. packaging	ca. 7,2 kg; 9,5 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/830/D

114395000-00807972

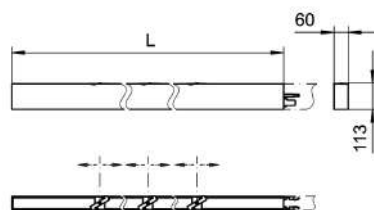


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.650 lm
Luminous efficiency ¹⁾	approx. 101 lm/W
Light type/-color	Warm white
Colour temperatur	approx. 3.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077501
Weight without/incl. packaging	ca. 7,2 kg; 9,5 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/840/D

114359000-00807936

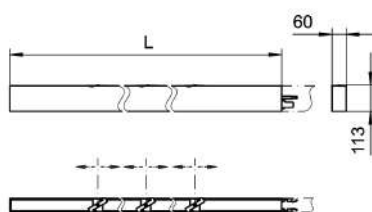


Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330078102
Weight without/incl. packaging	ca. 7,2 kg; 9,5 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Surface-mounted luminaire. DOTOO.line

DLA 3000/840/D

114383000-00807960

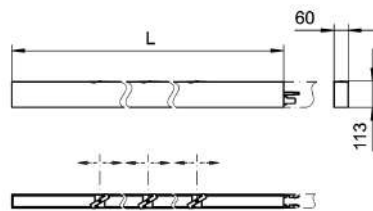

Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 26 W
Standby	ca. 0,15 W
Power factor	env. 0,98
Luminous flux	approx. 2.750 lm
Luminous efficiency ¹⁾	approx. 105 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	IP 40; I
Technology	Continuously dimmable
Operation	External
Housing	Sectional aluminium; Silver
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Design	mounted version
Fastening	Ceiling mounted
Life expectancy LED	L90B50 50.000h
EAN	4013330077815
Weight without/incl. packaging	ca. 7,2 kg; 9,5 kg
Dimensions (dimensional drawing)	L=2250mm
Packaging dimensions	ca. 2.410 mm; 190 mm; 120 mm
Special features	Flicker-free; DALI Load 1x; Suitable as emergency lighting; Through-wired, up to 18 m on one mains connection; Mechanical and electrical connection of the individual modules without tools; TouchDIM - dimming via standard switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: wne@nt-rt.ru || сайт: <https://waldmann.nt-rt.ru/>